

ECMA

Standardizing Information and Communication Systems

**Private Integrated Services
Network (PISN) -
Inter-Exchange Signalling
Protocol -
Recall Supplementary Service**

ECMA

Standardizing Information and Communication Systems

**Private Integrated Services
Network (PISN) -
Inter-Exchange Signalling
Protocol -
Recall Supplementary Service**

(QSIG-RE)

Brief History

This Standard is one of a series of ECMA standards defining services and signalling protocols applicable to Private Integrated Services Networks. The series uses the ISDN concepts as developed by ITU-T (formerly CCITT) and is also within the framework of standards for open systems interconnection as defined by ISO.

This Standard specifies the signalling protocol for use at the Q reference point in support of the Recall supplementary service.

The Standard is based upon the practical experience of ECMA member companies and the results of their active and continuous participation in the work of ISO/IEC JTC1, ITU-T, ETSI and other international and national standardization bodies. It has been produced under ETSI work item DE/ECMA-00102. It represents a pragmatic and widely based consensus.

This ECMA Standard is contributed to ISO/IEC JTC1 under the terms of the fast-track procedure, for adoption as an ISO/IEC International Standard.

This ECMA Standard has been adopted by the ECMA General Assembly of December 1994.

Table of contents

	Page
1 Scope	1
2 Conformance	1
3 References	1
4 Definitions	2
4.1 External definitions	2
4.2 Served user, User A	2
4.3 Served User PINX	2
5 List of acronyms	2
6 Signalling protocol for the support of SS-RE	3
6.1 SS-RE description	3
6.2 SS-RE operational requirements	3
6.2.1 Provision/withdrawal	3
6.2.2 Requirements on the Primary PINX	3
6.2.3 Requirements on the Served User PINX	3
6.3 SS-RE coding requirements	4
6.3.1 Operations	4
6.3.2 Information elements	5
6.3.3 Messages	5
6.4 SS-RE State definitions	5
6.4.1 States at the Served User PINX	5
6.4.2 States at the Primary PINX	5
6.5 SS-RE signalling procedures	5
6.5.1 Actions at the Served User PINX	5
6.5.2 Actions at the Primary PINX	6
6.6 SS-RE Impact of interworking with public ISDNs	6
6.7 SS-RE Impact of interworking with non-ISDNs	6
6.8 SS-RE Parameter values (Timers)	6
6.9 Protocol interactions between SS-RE and other supplementary services and ANFs	6
6.9.1 Interaction with Calling Name Identification Presentation (SS-CNIP)	7
6.9.2 Interaction with Connected Name Identification Presentation (SS-CONP)	7
6.9.3 Interaction with Call Forwarding Unconditional (SS-CFU)	7
6.9.4 Interaction with Call Forwarding Busy (SS-CFB)	7
6.9.5 Interaction with Call Forwarding No Reply (SS-CFNR)	7
6.9.6 Interaction with Call Transfer (SS-CT)	7
6.9.7 Interaction with Path Replacement (ANF-PR)	7
6.9.8 Interaction with Call Completion to Busy Subscriber (SS-CCBS)	7
6.9.9 Interaction with Call Completion on No Reply (SS-CCNR)	7

6.9.10 Interaction with Call Offer (SS-CO)	8
6.9.11 Interaction with Do Not Disturb (SS-DND)	8
6.9.12 Interaction with Do Not Disturb Override (SS-DNDO)	8
6.9.13 Interaction with Call Intrusion (SS-CI)	8
6.9.14 Advice of Charge (SS-AOC)	8
6.9.15 Cordless Terminal Location Registration (SS-CTLR)	8
6.9.16 Cordless Terminal Incoming Call (ANF-CTMI)	8
6.9.17 Interactions with Interception delayed (ANF-CINT)	8
Annex A - Protocol Implementation Conformance Statement (PICS) Proforma	9
Annex B - Example of message sequences	15
Annex C - Specification and Description Language (SDL) Representation of procedures	17
Annex D - Imported ASN.1 definitions	21

1 Scope

This Standard specifies the signalling protocol for the support of Recall supplementary service (SS-RE) at the Q reference point between Private Integrated Services Network Exchanges (PINXs) connected together within Private Integrated Services Network (PISN).

SS-RE is a supplementary service which provides for the re-direction of a transferred call back to the served user if the call is unanswered. SS-RE is only applicable after transfer by join, not after transfer by rerouting.

The Q reference point is defined in ISO/IEC 11579-1.

Service specifications are produced in three stages and according to the method specified in ETS 300 387. This Standard contains the stage 3 specification for the Q reference point and satisfies the requirements identified by the stage 1 and stage 2 specifications in ECMA-213.

The signalling protocol for SS-RE operates on top of the signalling protocol for basic circuit switched call control, as specified in prETS 300 172 (3rd edition), and uses certain aspects of the generic procedures for the control of supplementary services specified in ISO/IEC 11582.

This Standard also specifies additional signalling protocol requirements for the support of interactions at the Q reference point between SS-RE and other supplementary services and ANFs. However, the interaction with the Call Transfer supplementary service is specified as part of SS-RE signalling procedures as it is the essential aspect of the Recall supplementary service.

NOTE 1

Additional interactions that have no impact on the signalling protocol at the Q reference point can be found in the relevant stage 1 specifications.

This Standard is applicable to PINXs which can be interconnected to form a PISN.

2 Conformance

In order to conform to this Standard, a PINX shall satisfy the requirements identified in the Protocol Implementation Conformance Statement (PICS) proforma in annex A.

Conformance to this Standard includes conforming to those clauses that specify protocol interactions between SS/RE and other supplementary services and ANFs for which signalling protocols at the Q reference point are supported in accordance with the stage 3 standards concerned.

3 References

- | | |
|-----------------|---|
| ECMA-142 | Specification, Functional Model and Information Flows for Control Aspects of Circuit Mode Basic Services in Private Telecommunication Networks (BCSD) (1990) |
| ECMA-177 | Private Telecommunication Networks (PTN) - Specification, Functional Model and Information Flows - Call Transfer Supplementary Service (CTSD) (1992) |
| ECMA-213 | Private Telecommunication Networks (PTN) - Specification, Functional Model and Information Flows - Recall Supplementary Service (RESD) (1994) |
| ISO/IEC 11579-1 | Information technology - Telecommunications and information exchange between systems - Private Integrated Services Network - Part 1: Reference configuration for PISN exchanges (PINX) (1994) |
| ISO/IEC 11582 | Information technology - Telecommunications and information exchange between systems - Private Integrated Services Network - Generic functional protocol for the support of supplementary services - Inter-exchange signalling procedures and protocol (1995) |
| ISO/IEC 13868 | Information technology - Telecommunications and information exchange between systems - Private Integrated Services Network - Inter-exchange signalling protocol - Name identification supplementary services (1995) |
| ISO/IEC 13869 | Information technology - Telecommunications and information exchange between systems - Private Integrated Services Network - Inter-exchange signalling protocol - Call transfer supplementary service (1995) |

ISO/IEC 13873	Information technology - Telecommunications and information exchange between systems - Private Integrated Services Network - Inter-exchange signalling protocol - Diversion supplementary services (1995)
prETS 300 172	Private Telecommunication Network (PTN); Inter-exchange signalling protocol; Circuit mode basic services (3rd edition)
ETS 300 387	Private Telecommunication Network (PTN); Method for the specification of basic and supplementary services (1994)
CCITT Rec. I.112	Vocabulary of terms for ISDNs (1988)
CCITT Rec. I.210	Principles of telecommunication services supported by an ISDN and the means to describe them (1988)
CCITT Rec. Z.100	Specification and description language (1988)

4 Definitions

For the purpose of this Standard the following definitions apply.

4.1 External definitions

This Standard uses the following terms defined in other documents:

- Application Protocol Data Unit	(ISO/IEC 11582)
- Basic Service	(CCITT Rec. I.210)
- Call, Basic Call	(ISO/IEC 11582)
- End PINX	(ISO/IEC 11582)
- Gateway PINX	(prETS 300 172 (3rd edition))
- Integrated Services Digital Network	(CCITT Rec. I.112)
- Interpretation APDU	(ISO/IEC 11582)
- Private Integrated Services Network (PISN)	(ISO/IEC 11579-1)
- Private Integrated Services Network Exchange (PINX)	(ISO/IEC 11579-1)
- Primary Call	(ECMA-177)
- Primary PINX	(ISO/IEC 13869)
- Secondary Call	(ECMA-177)
- Secondary PINX	(ISO/IEC 13869)
- Signalling	(CCITT Rec. I.112)
- Supplementary Service	(CCITT Rec. I.210)
- Supplementary Service Control Entity	(ISO/IEC 11582)
- User	(ECMA-142)
- User B	(ECMA-177)
- User C	(ECMA-177)

4.2 Served user, User A

The user of the Recall service located at the Served User PINX.

4.3 Served User PINX

The End PINX which initiates the call transfer procedures on behalf of user A and which recalls user A in case the recall condition applies.

5 List of acronyms

APDU	Application Protocol Data Unit
ASN.1	Abstract Syntax Notation One
ISDN	Integrated Services Digital Network
NFE	Network Facility Extension
PICS	Protocol Implementation Conformance Statement
PINX	Private Integrated Services Network Exchange
PISN	Private Integrated Services Network
SDL	Specification and Description Language
SS-CT	Call Transfer supplementary service

SS-RE Recall supplementary service

6 Signalling protocol for the support of SS-RE

6.1 SS-RE description

When the served user has a call established with user B and transfers that call to user C SS-RE enables user B to be re-connected to the served user if user C is being alerted and does not reply within a specified time, or optionally if the call is waiting at a busy user C and remains busy for a specified time.

6.2 SS-RE operational requirements

6.2.1 Provision/withdrawal

SS-RE is provided or withdrawn after pre-arrangement with the service provider, or may be available generally to all users. SS-RE may be withdrawn on request of the user or for administrative reasons.

6.2.2 Requirements on the Primary PINX

The basic call procedures specified in prETS 300 172 (3rd edition) shall be supported.

Generic procedures for the call related control of supplementary services, as specified in ISO/IEC 11582 for an End PINX, shall apply.

6.2.3 Requirements on the Served User PINX

The basic call procedures specified in prETS 300 172 (3rd edition) shall be supported.

Generic procedures for the call related control of supplementary services, as specified in ISO/IEC 11582 for an End PINX, shall apply.

6.3 SS-RE coding requirements

6.3.1 Operations

The operations defined in Abstract Syntax Notation number 1 (ASN.1) in table 1 shall apply.

Table 1 - Operations in Support of SS-RE (sheet 1 of 1)

Recall-Operations

{ iso (1) identified-organization (3) icd-ecma (0012) standard (0)
qsig-recall (214) recall-operations (0) }

DEFINITIONS EXPLICIT TAGS ::=

BEGIN

IMPORTS OPERATION, ERROR FROM Remote-Operation-Notation
{ joint-iso-ccitt (2) remote-operations (4) notation (0) }

Extension FROM Manufacturer-specific-service-extension-definition
{ iso (1) standard (0) pss1-generic-procedures (11582) msi-definition (0) }

PSS1InformationElement FROM Generic-parameters-definition
{ iso (1) standard (0) pss1-generic-procedures (11582) pss1-generic-parameters (6) }

Name FROM Name-Operations
{ iso (1) standard (0) pss1-name (13868) name-operations (0) }

PresentedNumberScreened, PartySubaddress FROM Addressing-Data-Elements
{ iso (1) standard (0) pss1-generic-procedures (11582) addressing-data-elements (9) };

RecallAlerting OPERATION
-- Sent from the Served User PINX to the Primary PINX
ARGUMENT ReAlertingArg

RecallAnswered OPERATION
-- Sent from the Served User PINX to the Primary PINX
ARGUMENT ReAnswerArg

ReAlertingArg ::= SEQUENCE {
 alertedNumber PresentedNumberScreened OPTIONAL,
 alertedName Name OPTIONAL,
 argumentExtension CHOICE {
 extension [6] IMPLICIT Extension,
 multipleExtension [7] IMPLICIT SEQUENCE OF Extension
 } OPTIONAL }

ReAnswerArg ::= SEQUENCE {
 connectedNumber PresentedNumberScreened,
 connectedSubaddress PartySubaddress OPTIONAL,
 connectedName Name OPTIONAL,
 partyCategory PSS1InformationElement OPTIONAL,
 -- The basic call information element Party category can be embedded in element
 -- partyCategory.

argumentExtension	CHOICE { extension multipleExtension } OPTIONAL }	[6] IMPLICIT Extension, [7] IMPLICIT SEQUENCE OF Extension
recallAlerting	RecallAlerting	::= 57
recallAnswered	RecallAnswered	::= 58
END -- of Recall-Operations		

6.3.2 Information elements

6.3.2.1 Facility information element

The operations defined in 6.3.1 shall be coded in the Facility information element in accordance with ISO/IEC 11582.

When conveying the invoke APDU of the operations defined in 6.3.1, the destinationEntity data element of the NFE shall contain value endPINX and the Interpretation APDU shall contain value discardAnyUnrecognisedInvokePdu.

6.3.3 Messages

The Facility information element shall be conveyed in the messages as specified in clause 10 of ISO/IEC 11582.

6.4 SS-RE State definitions

6.4.1 States at the Served User PINX

The procedures for the Served User PINX are written in terms of the following conceptual states existing within the SS-RE Supplementary Service Control entity.

6.4.1.1 RE-Idle

SS-RE is not operating at the Served User PINX.

6.4.1.2 RE-Await-Answer-From-User-A

The recall to user A has been initiated by the Served User PINX.

6.4.2 States at the Primary PINX

The procedures for the Primary PINX are written in terms of the following conceptual states existing within the SS-RE Supplementary Service Control entity in that PINX in association with a particular call:

6.4.2.1 RE-Idle-P

SS-RE is not operating at the Primary PINX.

6.5 SS-RE signalling procedures

An example message sequence is shown in annex B.

NOTE 2

The specification in this section is based on each of the End PINXs involved in SS-CT being a different PINX, but this section is also applicable to scenarios where two of the three PINXs are the same. In those scenarios some of the signalling procedures and message flows described in this are internal to the PINX implementation and therefore outside the scope of this Standard.

6.5.1 Actions at the Served User PINX

6.5.1.1 Normal procedures

NOTE 3

It is assumed that SS-CT has been invoked successfully before the procedures of SS-RE are started and user C has not answered the call.

When recall to user A occurs, the Served User PINX shall enter state RE-Await-Answer-From-User-A and initiate clearing of the secondary call according to the procedures of prETS 300 172 (3rd edition).

In state RE-Await-Answer-From-User-A, the Served User PINX shall send a FACILITY message with a recallAlerting invoke APDU to the Primary PINX when alerting of user A commences and a recallAnswered invoke APDU when user A answers the call. The argument of the recallAlerting invoke APDU may contain the elements alertedNumber and/or alertedName if it is known that presentation restriction does not apply.

The Served User PINX shall enter state RE-Idle after the recallAnswered invoke APDU has been sent or when the call is cleared.

6.5.1.2 Exceptional procedures

If the recall to user A cannot be completed due to e.g. user A does not answer the call, additional implementation specific procedures may be provided by the Served User PINX.

6.5.2 Actions at the Primary PINX

6.5.2.1 Normal procedures

NOTE 4

It is assumed that SS-CT has been invoked successfully before the procedures of SS-RE are started.

On receipt of a recallAlerting invoke APDU or a recallAnswered invoke APDU in a FACILITY message from the Served User PINX, the Primary PINX shall remain in state RE-Idle-P and convey appropriate alerting or answer notifications to user B. The received number information may be conveyed by the Primary PINX to the user subject to number presentation restriction.

If element connectedName or alertedName is present, the received name information may be conveyed by the Primary PINX to the user subject to name presentation restriction. Any other information in the invoke APDU may be conveyed to the user.

6.5.2.2 Exceptional procedures

Not applicable.

6.6 SS-RE Impact of interworking with public ISDNs

When user A is in the PISN, and user B is in the public ISDN, the Gateway PINX shall convey the notifications of recall to the public ISDN by mapping the recallAlerting invoke APDU and recallAnswered invoke APDU received from the Served User PINX to equivalent indications towards the public ISDN, if the public ISDN is capable of receiving it.

When user A is in the public ISDN, and user B is in the PISN, the Gateway PINX shall convey any recall notifications received from the public ISDN to the Served User PINX by mapping them accordingly to the recallAlerting invoke APDU and recallAnswered invoke APDU.

NOTE 5

At the time of publication of this Standard, no equivalent service was specified for public ISDNs.

6.7 SS-RE Impact of interworking with non-ISDNs

When user A is in the PISN, and user B is in the other network, the Gateway PINX shall convey the notifications of recall to the other network by mapping the recallAlerting invoke APDU and recallAnswered invoke APDU received from the Served User PINX to equivalent indications towards the other network, if the other network is capable of receiving it.

When user A is in the other network, and user B is in the PISN, the Gateway PINX shall convey any recall notifications received from the other network to the Served User PINX by mapping them accordingly to the recallAlerting invoke APDU and recallAnswered invoke APDU.

6.8 SS-RE Parameter values (Timers)

Not applicable.

6.9 Protocol interactions between SS-RE and other supplementary services and ANFs

This clause specifies protocol interactions with other supplementary services and ANFs for which stage 3 standards had been published at the time of publication of this Standard. For interactions with supplementary services and ANFs for which stage 3 standards are published subsequent to the publication of this Standard, see those other stage 3 standards.

NOTE 6

Simultaneous conveyance of APDUs for SS-RE and another supplementary service or ANF in the same message, each in accordance with the requirements of its respective stage 3 Standard, does not, on its own, constitute a protocol interaction.

6.9.1 Interaction with Calling Name Identification Presentation (SS-CNIP)

No interaction.

6.9.2 Interaction with Connected Name Identification Presentation (SS-CONP)

Provision of the connected name to the calling user following recall is specified in 6.5.2.1.

6.9.3 Interaction with Call Forwarding Unconditional (SS-CFU)

The following interaction shall apply if SS-CFU is supported in accordance with ISO/IEC 13873.

6.9.3.1 Actions at the SS-RE Served User PINX

If SS-CFU is invoked, no divertingLegInformation1 or divertingLegInformation3 invoke APDU shall be sent to the Primary PINX.

When sending a recallAlerting or recallAnswered invoke APDU, the information in the argument shall relate to the diverted-to user instead of to user A.

On receipt of a callRerouteing invoke APDU during invocation of recall, the Served User PINX shall act as the Rerouteing PINX.

6.9.4 Interaction with Call Forwarding Busy (SS-CFB)

The following interaction shall apply if SS-CFB is supported in accordance with ISO/IEC 13873.

6.9.3.1 shall apply with "CFU" replaced by "CFB".

6.9.5 Interaction with Call Forwarding No Reply (SS-CFNR)

The following interaction shall apply if SS-CFNR is supported in accordance with ISO/IEC 13873.

6.9.5.1 Actions at a SS-RE Served User PINX for join

In state RE-Await-Answer-From-User-A, the SS-RE Served User PINX shall convey any received divertingLegInformation1 invoke APDU or divertingLegInformation3 invoke APDU to the Primary PINX.

When the diverted-to user answers, the actions shall be as specified in 6.5.1.1 when user A answers.

In state RE-Await-Answer-From-User-A, on receipt of a callRerouting invoke APDU, the SS-RE Served User PINX shall act as the Rerouteing PINX. Any divertingLegInformation1 invoke APDUs or divertingLegInformation3 invoke APDUs generated in accordance with Rerouteing PINX procedures shall be sent to the Primary PINX.

6.9.5.2 Actions at a Primary PINX

The actions at an Originating PINX in 6.5.1.1 and 6.5.1.2 of ISO/IEC 13873 shall apply also to the Primary PINX with the following exceptions:

- The basic call protocol control state in which a divertingLegInformation1 invoke APDU can be received is "Active".
- On receipt of a recallAnswered invoke APDU, the Primary PINX shall enter state CFO-Idle.

6.9.6 Interaction with Call Transfer (SS-CT)

Interactions are specified in clauses 6.1 to 6.8.

6.9.7 Interaction with Path Replacement (ANF-PR)

No interaction.

6.9.8 Interaction with Call Completion to Busy Subscriber (SS-CCBS)

No interaction.

6.9.9 Interaction with Call Completion on No Reply (SS-CCNR)

No interaction.

6.9.10 Interaction with Call Offer (SS-CO)

No interaction.

6.9.11 Interaction with Do Not Disturb (SS-DND)

No interaction.

6.9.12 Interaction with Do Not Disturb Override (SS-DNDO)

No interaction.

6.9.13 Interaction with Call Intrusion (SS-CI)

No interaction.

6.9.14 Advice of Charge (SS-AOC)

No interaction.

6.9.15 Cordless Terminal Location Registration (SS-CTLR)

No interaction.

6.9.16 Cordless Terminal Incoming Call (ANF-CTMI)

No interaction.

6.9.17 Interactions with Interception delayed (ANF-CINT)

The following interaction shall apply if ANF-CINT is supported in accordance with ECMA-221.

6.9.17.1 Actions at a SS-RE Served User PINX

If recall fails or remains unanswered and if call interception is invoked, any `cintLegInformation1`, `divertingLegInformation3`, `cintDisable` or `cintEnable` invoke APDUs generated or received in accordance with ANF-CINT procedures shall be sent to the SS-RE Primary PINX.

6.9.17.2 Actions at a SS-RE Primary PINX

The actions at an ANF-CINT Originating PINX specified in 6.6.3 of ECMA-221 shall apply also to the SS-RE Primary PINX.

NOTE 7

The basic call protocol control state in which a `cintLegInformation1`, `divertingLegInformation3`, `cintEnable` or `cintDisable` invoke APDU can be received is "active".

Annex A
(normative)

Protocol Implementation Conformance Statement (PICS) Proforma

A.1 Introduction

The supplier of a protocol implementation which is claimed to conform to this Standard shall complete the Protocol Implementation Conformance Statement (PICS) proforma in clause A.3.

A completed PICS proforma is the PICS for the implementation in question. The PICS is a statement of which capabilities and options of the protocol have been implemented. The PICS can have a number of uses, including use:

- by a protocol implementor, as a check list to reduce the risk of failure to conform to the standard through oversight;
- by the supplier and acquirer (or potential acquirer) of the implementation, as a detailed indication of the capabilities of the implementation, stated relative to the common basis for understanding provided by the standard PICS proforma;
- by the user (or potential user) of the implementation, as a basis for initially checking the possibility of interworking with another implementation (note that, while interworking can not be guaranteed, failure to interwork can often be predicted from incompatible PICSs);
- by a protocol tester, as the basis for selecting appropriate tests against which to assess the claim for conformance of the implementation.

A.2 Instructions for completing the PICS proforma

A.2.1 General structure of the PICS proforma

The PICS proforma is a fixed format questionnaire divided into subclauses each containing a group of individual items. Each item is identified by an item number, the name of the item (question to be answered) and the reference(s) to the clause(s) that specifies (specify) the item in the main body of this Standard.

The "Status" column indicates whether an item is applicable and if so whether support is mandatory or optional. The following terms are used:

m	mandatory (the capability is required for conformance to the protocol);
o	optional (the capability is not required for conformance to the protocol, but if the capability is implemented, it is required to conform to the protocol specifications);
o.<n>	optional, but support of at least one of the group of options labelled by the same numeral <n> is required;
x	prohibited;
c.<cond>	conditional requirement, depending on support for the item or items listed in condition <cond>;
<item>;m	simple conditional requirement, the capability being mandatory if item number <item> is supported, otherwise not applicable;
item>;o	simple conditional requirement, the capability being optional if item number <item> is supported, otherwise not applicable.

Answers to the questionnaire items are to be provided either in the "Support" column, by simply marking an answer to indicate a restricted choice (Yes or No) or in the "Not Applicable" column (N/A).

A.2.2 Additional information

Items of Additional Information allow a supplier to provide further information intended to assist the interpretation of the PICS. It is not intended or expected that a large quantity will be supplied, and a PICS can be considered

complete without any such information. Examples might be an outline of the ways in which a (single) implementation can be set up to operate in a variety of environments and configurations.

References to items of Additional Information may be entered next to any answer in the questionnaire, and may be included in items of Exception information.

A.2.3 Exception information

It may occasionally happen that a supplier will wish to answer an item with mandatory or prohibited status (after any conditions have been applied) in a way that conflicts with the indicated requirements. No pre-printed answer will be found in the Support column for this. Instead, the supplier is required to write into the support column an *x.i* reference to an item of Exception Information, and to provide the appropriate rationale in the Exception item itself.

An implementation for which an Exception item is required in this way does not conform to this Standard. A possible reason for the situation described above is that a defect in the Standard has been reported, a correction for which is expected to change the requirement not met by the implementation.

A.3 PICS Proforma for ECMA-214

A.3.1 Implementation identification

Supplier	
Contact point for queries about the PICS	
Implementation name(s) and version(s)	
Other information necessary for full identification, e.g. name(s) and version(s) for machines and/or operating systems; system name(s)	

Only the first three items are required for all implementations; other information may be completed as appropriate in meeting the requirement for full identification.

The terms Name and Version should be interpreted appropriately to correspond with a suppliers terminology (e.g. Type, Series, Model).

A.3.2 Protocol summary

Protocol version	1.0
Addenda Implemented (if applicable)	
Amendments Implemented	
Have any exception items been required (see A.2.3)?	No <input type="checkbox"/> Yes <input type="checkbox"/> (The answer Yes means that the implementation does not conform to this Standard)

Date of Statement	
-------------------	--

A.3.3 General

Item	Name of Item	Reference	Status	N/A	Support
A1	Support of SS-RE in Served User PINX		o.1		Yes [] No []
A2	Support of SS-RE in Primary PINX		o.1		Yes [] No []
A3	Support of SS-CT (transfer by join)		A1:m	[]	m: Yes []
A4	Support of SS-RE in Gateway PINX to public ISDNs		o		Yes [] No []
A5	Support of SS-RE in Gateway PINX to non-ISDNs		o		Yes [] No []

A.3.4 Procedures for SS-RE

Item	Name of Item	Reference	Status	N/A	Support
B1	Support of prETS 300 172 (3rd edition) and ISO/IEC 11582 procedures at a Served User PINX	6.2.3	A1:m	[]	m: Yes []
B2	Support of prETS 300 172 (3rd edition) and ISO/IEC 11582 procedures at a Primary PINX	6.2.2	A2:m	[]	m: Yes []
B3	Signalling procedures at a Served User PINX	6.5.1	A1:m	[]	m: Yes []
B4	Signalling procedures at a Primary PINX	6.5.2	A2:m	[]	m: Yes []
B5	Behaviour as Gateway for interworking with public ISDNs	6.6	A4:m	[]	m: Yes []
B6	Behaviour as Gateway for interworking with non-ISDNs	6.7	A5:m	[]	m: Yes []

A.3.5 Coding

Item	Name of Item	Reference	Status	N/A	Support
C1	Sending of recallAlerting invoke APDU in Served User PINX	6.3	A1:m	[]	m: Yes []
C2	Receipt of recallAlerting invoke APDU in Primary User PINX	6.3	A2:m	[]	m: Yes []
C3	Sending of recallAnswered invoke APDU in Served User PINX	6.3	A1:m	[]	m: Yes []
C4	Receipt of recallAnswered invoke APDU in Primary PINX	6.3	A2:m	[]	m: Yes []

A.3.6 Interactions between SS-RE and SS-CFU

Item	Name of Item	Reference	Status	N/A	Support
D1	Support of SS-CFU (Rerouteing PINX)		o		Yes [] No []
D2	Actions at the SS-RE Served User PINX	6.9.3	c.1	[]	m: Yes []

c.1: if A1 and D1 then mandatory, else N/A

A.3.7 Interactions between SS-RE and SS-CFB

Item	Name of Item	Reference	Status	N/A	Support
E1	Support of SS-CFB (Rerouteing PINX)		o		Yes [] No []
E2	Actions at the SS-RE Served User PINX	6.9.4	c.1	[]	m: Yes []

c.1: if A1 and E1 then mandatory, else N/A

A.3.8 Interactions between SS-RE and SS-CFNR

Item	Name of Item	Reference	Status	N/A	Support
F1	Support of SS-CFNR (Rerouteing PINX)		o		Yes [] No []
F2	Support of SS-CFNR (Originating PINX)		o		Yes [] No []
F3	Actions at the SS-RE Served User PINX	6.9.5.1	c.1	[]	m: Yes []
F4	Actions at a Primary PINX	6.9.5.2	c.2	[]	m: Yes []

c.1: if A1 and F1 then mandatory, else N/A

c.2: if A2 and F2 then mandatory, else N/A

A.3.9 Interactions between SS-RE and ANF-CINT

Item	Name of Item	Reference	Status	N/A	Support
G1	Support of ANF-CINT (delayed)		o		Yes [] No []
G2	Interaction at a SS-RE Served User PINX	6.9.17.1	G1:m	[]	m: Yes []
G3	Interaction at a SS-RE Primary PINX	6.9.17.2	c.1	[]	m: Yes []

c.1: if G1 and (A3 or A4) then m else N/A

Annex B

(informative)

Example of message sequences

This annex describes a typical message flow of SS-RE. The following conventions are used in the figure of this annex.

1. The following notation is used:


- ▶ Message containing SS-RE information
- ▶ Basic call message without SS-RE information
-▶ Symbolic primitive without SS-RE information

xxx.inv Invoke APDU for operation xxx

2. The figure show messages exchanged via Protocol Control between PINXs involved in SS-RE. Only messages relevant to SS-RE are shown.
3. Only the relevant information content (i.e. remote operation APDUs) is listed below each message name. The Facility information elements containing remote operation APDUs are not explicitly shown. Information with no impact on SS-RE is not shown.

B.1 Message sequence for SS-RE

Figure B.1.1 shows the successful invocation of SS-RE with alert and answer indications.

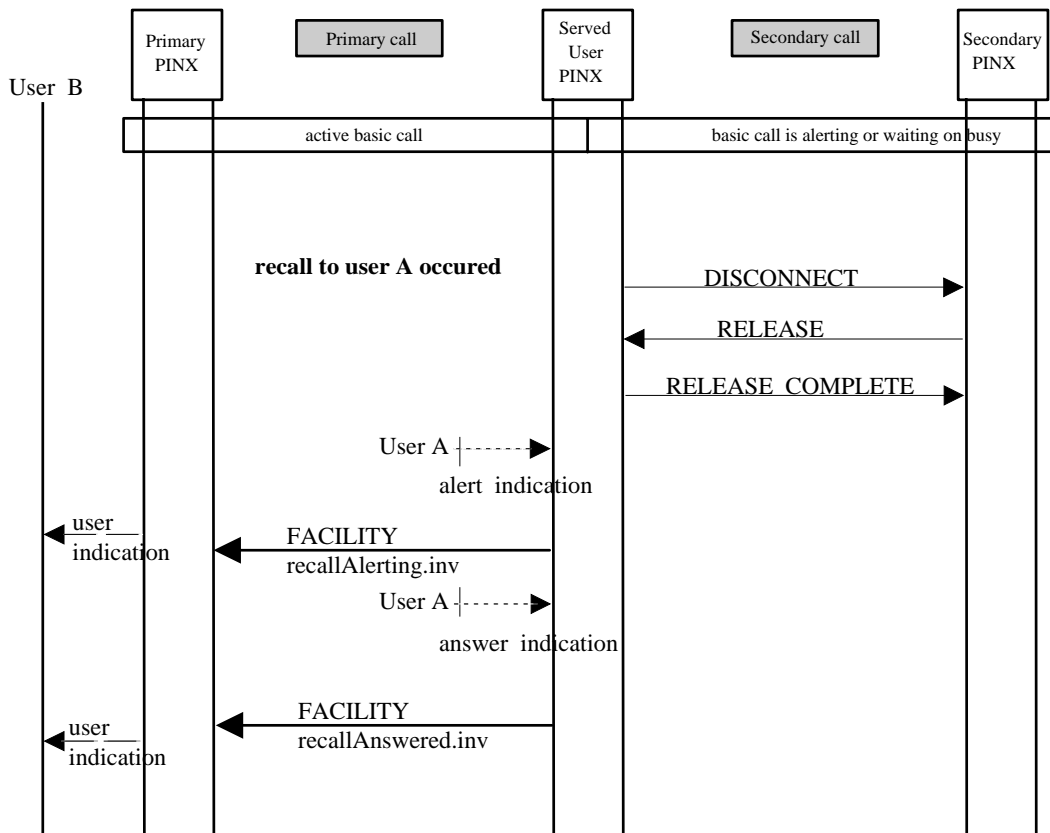

ECMA94-0140-A

Figure B.1.1 - Successful invocation of SS-RE

Annex C

(informative)

Specification and Description Language (SDL) Representation of procedures

The diagrams in this annex use the Specification and Description Language defined in CCITT Recommendation Z.100 (1988).

Each diagram represents the behaviour of an SS-RE Supplementary Service Control entity at a particular type of PINX. In accordance with the protocol model described in ISO/IEC 11582, the Supplementary Service Control entity uses, via the Coordination Function, the services of Generic Functional Procedures Control and Basic Call Control.

Where an output symbol represents a primitive to the Coordination Function, and that primitive results in a QSIG message being sent, the output bears the name of the message and any remote operations APDU(s) or notification(s) contained in that message. In case of a message specified in prETS 300 172 (3rd edition), basic call actions associated with the sending of that message are deemed to occur.

Where an input symbol represents a primitive from the Coordination Function and that primitive is the result of a QSIG message being received, the input signal bears the name of the message and any remote operation APDU(s) or notification(s) contained in that message. In case of a message specified in prETS 300 172 (3rd edition), basic call actions associated with the receipt of that message are deemed to have occurred.

The following abbreviations are used:


inv	invoke APDU
-----	-------------

C.1 SDL Representation of SS-RE at the Served User PINX

Figure C.1 shows the behavior of an SS-RE Supplementary Service Control entity within the Served User PINX.

Input signals from the right and output signals to the right represent primitives from and to the Coordination Function in respect of messages being received and sent or internal primitives.

Input signals from the left represent primitives between the SS-RE Supplementary Service Control entity and the served user.

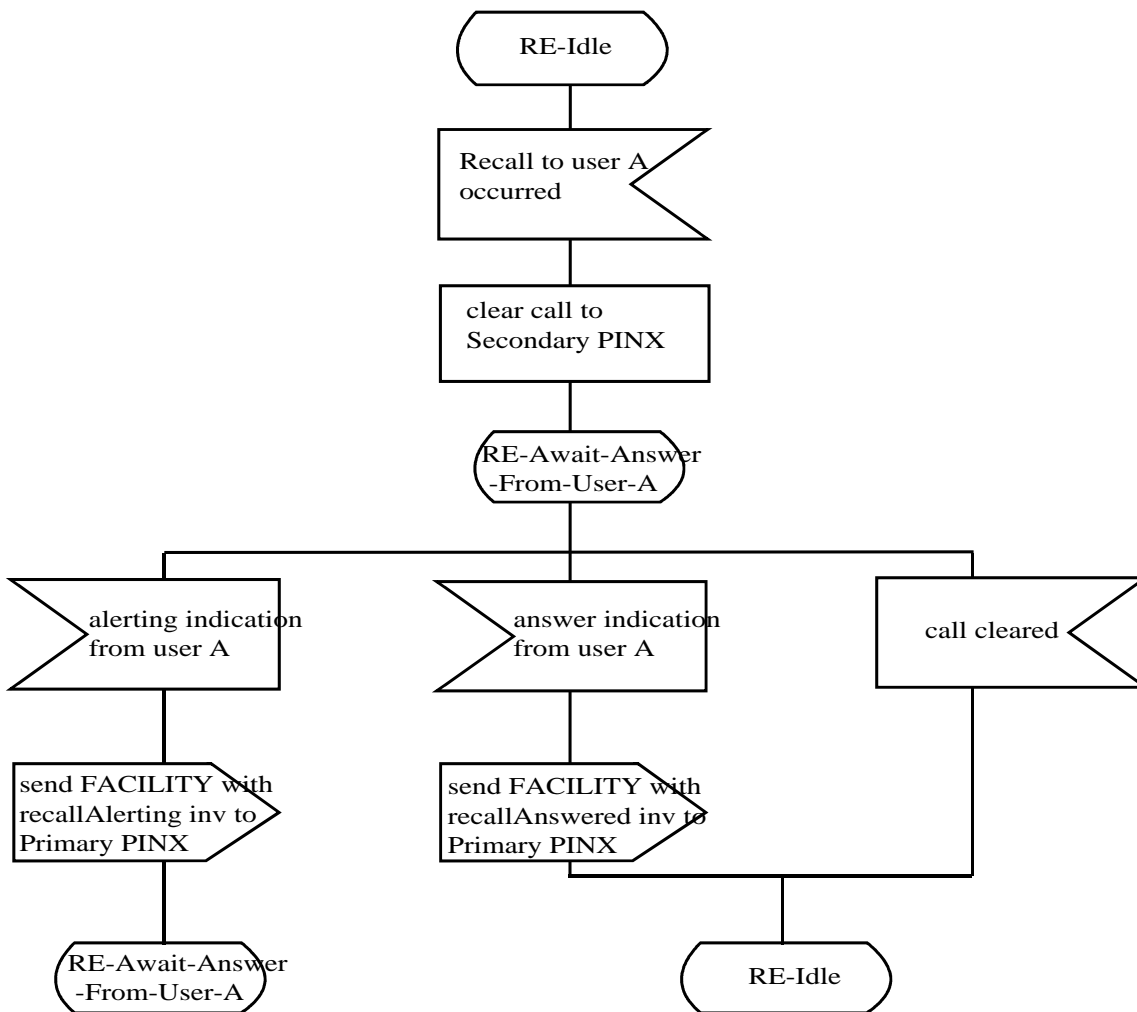

ECMA-94-0150-A


Figure C.1 - SDL for Served User PINX

C.2 SDL Representation of SS-RE at the Primary PINX

Figure C.2 shows the behavior of an SS-RE Supplementary Service Control entity within the Primary PINX.

Input signals from the right represent primitives from the Coordination Function in respect of the messages being sent and received.

Outputs signals to the left represent primitives between the SS-RE Supplementary Service Control entity and the primary user.

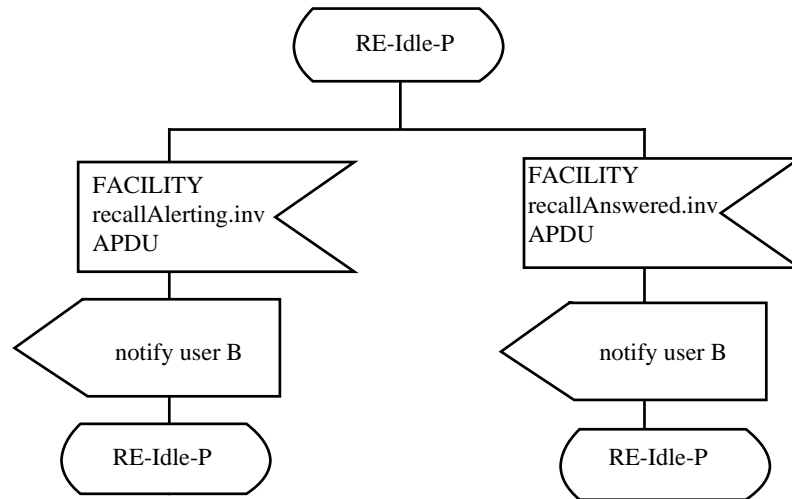

EMA-94-0151-A

Figure C.2 - SDL for Primary PINX

Annex D

(informative)

Imported ASN.1 definitions

Table D.1 is an extract from module Addressing-Data-Elements in ISO/IEC 11582.

Table D.1 - Imported ASN.1 Definitions from Addressing-Data-Elements

PartyNumber	::=	CHOICE { unknownPartyNumber [0] IMPLICIT NumberDigits, publicPartyNumber [1] IMPLICIT PublicPartyNumber, dataPartyNumber [3] IMPLICIT NumberDigits, telexPartyNumber [4] IMPLICIT NumberDigits, privatePartyNumber [5] IMPLICIT PrivatePartyNumber, nationalStandardPartyNumber [8] IMPLICIT NumberDigits }
NumberDigits	::=	NumericString (SIZE (1..20))
PrivatePartyNumber	::=	SEQUENCE { privateTypeOfNumber PrivateTypeOfNumber, privateNumberDigits NumberDigits }
PrivateTypeOfNumber	::=	ENUMERATED { unknown (0), level2RegionalNumber (1), level1RegionalNumber (2), pISNSpecificNumber (3), localNumber (4), abbreviatedNumber (6) }
PublicPartyNumber	::=	SEQUENCE { publicTypeOfNumber PublicTypeOfNumber, publicNumberDigits NumberDigits }
PublicTypeOfNumber	::=	ENUMERATED { unknown (0), internationalNumber (1), nationalNumber (2), networkSpecificNumber (3), subscriberNumber (4), abbreviatedNumber (6) }
PresentationAllowedIndicator	::=	BOOLEAN
PresentedNumberScreened	::=	CHOICE { presentationAllowedNumber [0] IMPLICIT NumberScreened, presentationRestricted [1] IMPLICIT NULL, numberNotAvailableDueToInterworking [2] IMPLICIT NULL, presentationRestrictedNumber [3] IMPLICIT NumberScreened }
NumberScreened	::=	SEQUENCE { PartyNumber, ScreeningIndicator }
ScreeningIndicator	::=	ENUMERATED { userProvidedNotScreened (0), userProvidedVerifiedAndPassed (1),

		userProvidedVerifiedAndFailed (2), networkProvided (3) }
PartySubaddress	::= CHOICE {	UserSpecifiedSubaddress, NSAPSubaddress }
UserSpecifiedSubaddress	::= SEQUENCE {	SubaddressInformation, oddCountIndicator BOOLEAN OPTIONAL }
NSAPSubaddress	::=	OCTET STRING (SIZE (1..20))
SubaddressInformation	::=	OCTET STRING (SIZE (1..20))

This Standard ECMA-214 is available free of charge from:

**ECMA
114 Rue du Rhône
CH-1204 Geneva
Switzerland**

**Fax: +41 22 849.60.01
Internet: helpdesk@ecma.ch**

This Standard can also be downloaded as files E214-DOC.EXE or E214-PSC.EXE from ECMANEWS