

# ECMA

EUROPEAN COMPUTER MANUFACTURERS ASSOCIATION

---

## STANDARD ECMA-152

DATA INTERCHANGE ON 12,7 mm 18-TRACK  
MAGNETIC TAPE CARTRIDGES  
- EXTENDED FORMAT-

June 1991

# ECMA

EUROPEAN COMPUTER MANUFACTURERS ASSOCIATION

---

## STANDARD ECMA-152

DATA INTERCHANGE ON 12,7 mm 18-TRACK  
MAGNETIC TAPE CARTRIDGES  
- EXTENDED FORMAT-

June 1991

## BRIEF HISTORY

ECMA have produced a series of ECMA Standards for cassettes and cartridges containing magnetic tapes of different width and characteristics.

- ECMA-34 (1976): Data Interchange on 3,81 mm Magnetic Tape Cassette (32 bpmm, Phase Encoded)
- ECMA-46 (1976): Data Interchange on 6,30 mm Magnetic Tape Cartridge (63 bpmm, Phase Encoded)
- ECMA-79 (1985): Data Interchange on 6,30 mm Magnetic Tape Cartridge Using IMFM Recording at 252 ftpmm
- ECMA-98 (1985): Data Interchange on 6,30 mm Magnetic Tape Cartridge Using NRZ1 Recording at 394 ftpmm - Streaming Mode
- ECMA-120 (1987): Data Interchange on 12,7 mm 18-Track Magnetic Tape Cartridges
- ECMA-139 (1990): 3,81 mm Wide Magnetic Tape Cartridge for Information Interchange - Helical Scan Recording - DDS Format
- ECMA-145 (1990): 8 mm Wide Magnetic Tape Cartridge for Information Interchange, Helical Scan Recording
- ECMA-146 (1990): 3,81 mm Wide Magnetic Tape Cartridge for Information Interchange - Helical Scan Recording - DATA/DAT Format
- ECMA-150 (1991): 3,81 mm Wide Magnetic Tape Cartridge for Information Interchange - Helical Scan Recording - DDS-DC Format

The first five of these ECMA Standards concern media designed for the digital recording of data for storage and processing in data processing systems. In recent years, other magnetic media, originally developed for audio and video applications have been considered for use in data processing applications for storage as well as for information interchange. The recording method known as helical scan recording, together with new types of magnetic tapes of a width of less than 12,7 mm, allows higher capacities to be achieved. Standards ECMA-139, ECMA-145, ECMA-146, and ECMA-150 are the first of a series of ECMA Standards for such magnetic tape cartridges.

This Standard ECMA-152 is related to further developments of cartridges containing a 12,7 mm magnetic tape. It incorporates all the specifications of Standard ECMA-120, together with extensions and modifications which specify the additional features of an extended format that also allows higher capacities to be achieved. The specifications of the tape, cartridge, recorded signal, recording method and most of the recorded format are identical with those in Standard ECMA-120.

It is not intended that this Standard replaces Standard ECMA-120. Existing drives and cartridges which conform to Standard ECMA-120 will continue to do so and will not conform to all requirements of this Standard ECMA-152. Drives conforming to this Standard ECMA-152 will be able to write on, and read from, cartridges according to Standard ECMA-120.

Adopted as an ECMA Standard by the General Assembly of June 1991.

## Table of Contents

	Page
SECTION I - GENERAL	1
1 SCOPE AND CONFORMANCE	1
1.1 Scope	1
1.2 Conformance	1
1.2.1 Magnetic Tape Cartridge	1
1.2.2 Generating System	1
1.2.3 Receiving System	1
2 CONVENTIONS AND NOTATIONS	2
2.1 Representation of Numbers	2
2.2 Names	2
2.3 Acronyms	2
3 REFERENCES	2
4 DEFINITIONS	3
4.1 Algorithm	3
4.2 Average Signal Amplitude	3
4.3 Back Surface	3
4.4 Byte	3
4.5 Cartridge	3
4.6 Cyclic Redundancy Check Character	3
4.7 Data Block	3
4.8 Data Records	3
4.8.1 Processed Data Record (PDR)	3
4.8.2 Host Data Record	3
4.8.3 Logical Data Record (LDR)	3
4.8.4 User Data Record (UDR)	3
4.9 Error Correcting Code	3
4.10 Flux Transition Position	4
4.11 Flux Transition Spacing	4
4.12 Magnetic Tape	4
4.13 Master Standard Reference Tape	4
4.14 Packet	4
4.15 Packet Identifier	4
4.16 Packet Trailer	4
4.17 Physical Recording Density	4
4.18 Postamble	4
4.19 Preamble	4
4.20 Processed Data	4
4.21 Processing	4



4.22	Reference Field	4
4.23	Secondary Standard Reference Tape	4
4.25	Standard Reference Amplitude (SRA)	5
4.26	Standard Reference Current	5
4.27	Test Recording Current	5
4.28	Track	5
4.29	Typical Field	5
4.30	Transformation	5
5	ENVIRONMENT AND SAFETY	5
5.1	Cartridge/Tape Testing Environment	5
5.2	Cartridge Operating Environment	5
5.3	Cartridge Storage Environment	6
5.4	Safety Requirements	6
5.4.1	Safeness	6
5.4.2	Flammability	6
5.5	Transportation	6
SECTION II - CHARACTERISTICS OF THE TAPE		6
6	CHARACTERISTICS OF THE TAPE	6
6.1	Material	6
6.2	Tape Length	6
6.3	Tape Width	6
6.4	Tape Discontinuity	6
6.5	Total Thickness of Tape	7
6.6	Base Material Thickness	7
6.7	Longitudinal Curvature	7
6.8	Out-of-Plane Distortions	7
6.9	Cupping	7
6.10	Dynamic Frictional Characteristics	7
6.10.1	Frictional Drag Between the Recording Surface and the Tape Back Surface	7
6.10.2	Frictional Drag Between the Tape Recording Surface and Ferrite after	8
6.11	Coating Adhesion	8
6.12	Flexural Rigidity	9
6.13	Electrical Resistance of Coated Surfaces	9
6.14	Tape Durability	10
6.15	Inhibitor Tape	10
6.16	Tape Abrasivity	10
6.17	Pre-recording Condition	11
6.18	Magnetic Recording Characteristics	11
6.18.1	Typical Field	11
6.18.2	Signal Amplitude	11
6.18.3	Resolution	11
6.18.4	Overwrite	12
6.18.5	Narrow-Band Signal-to-Noise Ratio (NB-SNR)	12

6.19	Tape Quality	13
6.19.1	Missing Pulses	13
6.19.2	Missing Pulse Zones	13
6.19.3	Coincident Missing Pulse Zones	13
SECTION III - CARTRIDGE		13
7	DIMENSIONAL AND MECHANICAL CHARACTERISTICS OF THE CARTRIDGE	13
7.1	Overall Dimensions (figures 2 to 4)	14
7.2	Write-inhibit Mechanism (figures 2 and 3)	15
7.3	Label Area of the Rear Side (figures 3 to 4)	15
7.4	Label Area of the Top Side (figure 3)	15
7.5	Case Opening (figures 2, 3, 5 and 7)	16
7.6	Locating Notches (figures 5, 6 and 8)	16
7.7	Locating Areas (figure 5)	16
7.8	Inside Configuration of the Case around the Case Opening (figures 5 and 9)	17
7.9	Other External Dimensions of the Case (figure 6)	17
7.10	Central Window (figure 5)	17
7.11	Stacking Ribs	17
7.12	Flexibility of the Case	18
7.12.1	Requirements	18
7.12.2	Procedure	18
7.13	Tape Reel (figures 10 and 11)	18
7.13.1	Locking mechanism (figure 11)	18
7.13.2	Axis of rotation of the reel	19
7.13.3	Metallic insert	19
7.13.4	Toothed rim	19
7.13.5	Hub of the reel	19
7.13.6	Relative positions	20
7.13.7	Characteristics of the toothed rim (figure 12)	20
7.14	Leader Block (figure 13)	21
7.15	Attachment of the Tape to the Leader Block (figure 14)	21
7.16	Latching Mechanism (figure 15)	22
7.17	Tape Wind	22
7.18	Wind Tension	22
7.19	Circumference of the Tape Reel	22
7.20	Moment of Inertia	23
SECTION IV - RECORDING METHOD AND FORMATS		30
8	METHOD OF RECORDING	30
8.1	Physical Recording Density	30
8.2	Bit Cell Length	30
8.3	Average Bit Cell Length	30
8.4	Long-Term Average Bit Cell Length	30
8.5	Short-Term Average Bit Cell Length (STA)	30

8.6	Rate of Change	30
8.7	Bit Shift	30
8.8	Total Character Skew	31
8.9	Read Signal Amplitude	31
8.10	Coincident Missing Pulse Zones	31
9	TRACK FORMAT	31
9.1	Number of Tracks	31
9.2	Reference Edge	31
9.3	Track Positions	31
9.4	Track Width	31
9.5	Azimuth	32
10	PACKET FORMAT	32
10.1	Packet Elements	32
10.2	Packet ID	32
10.3	UDR	33
10.4	Packet Trailer	33
	10.4.1 Packet Trailer when data has been processed	33
	10.4.2 Packet Trailer when data has not been processed	34
11	DATA BLOCK FORMAT	34
11.1	Logical Content	34
	11.1.1 Control Bytes	34
11.2	Allocation of the Bytes of the Data Block to Frames	35
	11.2.1 Prefix Frames	37
	11.2.2 Data Frames	37
	11.2.3 Residual Frames	38
	11.2.4 Suffix Frames	40
11.3	Error Correcting Code (ECC)	41
	11.3.1 Diagonal Redundancy Check (DRC)	41
	11.3.2 Vertical Redundancy Check (VRC)	41
	11.3.3 ECC Format	42
	11.3.4 Summary of ECC	43
11.4	Recording of 8-bit bytes on the tape	44
11.5	Recorded Data Block	44
	11.5.1 Preamble	44
	11.5.2 Beginning of Data Mark (BDM)	44
	11.5.3 Resync Control Frame	44
	11.5.4 End of Data Mark (EDM)	45
	11.5.5 Postamble	45
11.6	Data Density	45

12	TAPE FORMAT	45
12.1	Density Identification Burst	46
12.2	ID Separator Burst	46
12.3	Interblock Gaps	46
12.4	Erase Gaps	47
	12.4.1 Normal Erase Gaps	47
	12.4.2 Elongated Erase Gaps	47
12.5	Tape Marks	47
12.6	Relation between Interblock Gaps, Erase Gaps and Tape Marks	48
	12.6.1 Interblock Gap followed by a Tape Mark	48
	12.6.2 Tape Mark followed by an Interblock Gap	48
	12.6.3 Interblock Gap followed by an Erase Gap	48
	12.6.4 Erase Gap followed by an Interblock Gap	48
	12.6.5 Summary of the relation between Interblock Gaps, Erase Gaps and Tape Marks	49
12.7	First and Last Recording on the Tape	49
12.8	Summary of the Tape Format	50
	12.8.1 Characteristics of Recording other than Recorded Data Blocks	50
	12.8.2 Arrangement of Recording on the Tape	50
12.9	Transform Change Records (TCRs)	51
	SECTION V	53
	APPENDIX A - RECOMMENDATIONS FOR TRANSPORTATION	55
	APPENDIX B - INHIBITOR TAPE	57
	APPENDIX C - TAPE ABRASIVITY MEASUREMENT PROCEDURE	59
	APPENDIX D - RECOMMENDATIONS ON TAPE DURABILITY	61
	APPENDIX E - PRE-RECORDING CONDITION	63
	APPENDIX F - REPRESENTATION OF 8-BIT BYTES BY 9-BIT PATTERNS	65
	APPENDIX G - MEASUREMENT OF BIT SHIFT	69
	APPENDIX H - DIMENSIONS OF THE CARTRIDGE	71
	APPENDIX J - SUMMARY OF DATA FLOW	77
	APPENDIX K - IMPLEMENTATION OF A CRC	79
	APPENDIX L - CALCULATION OF A PHYSICAL POSITION INDICATOR	81
	APPENDIX M - REGISTRATION OF ALGORITHMS	83



## SECTION I - GENERAL

### 1 SCOPE AND CONFORMANCE

#### 1.1 Scope

This ECMA Standard specifies the physical and magnetic characteristics of a 12,7 mm wide, 18-track magnetic tape cartridge, to enable interchangeability of such cartridges. It also provides a format and recording method, thus allowing, together with Standard ECMA-13 for Magnetic Tape Labelling, full data interchange by means of such magnetic tape cartridges.

The cartridge and recording method are identical with those described in ECMA-120. This ECMA Standard specifies extensions to the transformation of data before it is formatted as in ECMA-120.

These extensions:

- i) specify a method for increasing the utilization of the tape by combining smaller blocks of data into extended blocks;
- ii) specify a method for identifying whether the recorded data has been processed and, if it has been processed, the algorithm used for processing;
- iii) specify a method for including recorded data blocks conforming to this Standard and recorded data blocks conforming to ECMA-120 on the same tape.

The permissible routes for the flow of data are shown in Appendix J.

#### 1.2 Conformance

##### 1.2.1 Magnetic Tape Cartridge

A magnetic tape cartridge shall be in conformance with this Standard if:

- i) the cartridge meets all the requirements of clauses 4 to 7;
- ii) the recording on the tape meets the requirements of clauses 8 to 12;
- iii) for each recorded packet the algorithm used for processing the data therein, if processed data has been recorded, has (have) been registered and the registered identification is included in Byte 13 of the Packet ID Block of this packet (see 10.2).

##### NOTE 1

*If the algorithm has not been registered Byte 13 shall be set to (FF).*

##### 1.2.2 Generating System

A system generating a magnetic tape cartridge for interchange shall be entitled to claim conformance with this Standard if all the recordings that it makes on a tape meet the mandatory requirements of this Standard. A claim of conformance shall state whether or not one, or more, registered algorithms are implemented and, if so, the registered number(s) of all implemented algorithm(s).

##### 1.2.3 Receiving System

A system receiving a magnetic tape cartridge for interchange shall be entitled to claim conformance with this Standard if it is able to handle any recording made on the tape according to this Standard. In particular it shall:

- i) be able to recognize the occurrence of extended blocks and to identify and retrieve data from individual packets within the extended blocks;

- ii) be able to recognize that the data has been processed, to identify the algorithm(s) used, and to indicate to the host if it cannot restore the data to its original form;
- iii) be capable of restoring to its original form data which has been processed according to zero or more registered algorithms.

A claim of conformance shall state whether or not one, or more, registered algorithm(s) is (are) implemented and, if so, the registered number(s) of all implemented algorithms.

## 2 CONVENTIONS AND NOTATIONS

### 2.1 Representation of Numbers

The following conventions and notations apply in this Standard, unless otherwise stated:

- In each field the bytes shall be arranged with Byte 1, the most significant, first. Within each byte the bits shall be arranged with Bit 1, the most significant, first and Bit 8, the least significant bit, last. This order applies to the data, and to the input and output of the error correcting codes and the cyclic redundancy codes.
- Letters and digits in parentheses represent numbers in hexadecimal notation.
- Numbers in binary notation and bit combinations are represented by strings of ZEROs and ONEs.
- Numbers in binary notation and bit combinations are shown with the most significant bit to the left.
- The setting of bits is denoted by ZERO or ONE.

### 2.2 Names

The names of entities are given with a capital initial letter.

### 2.3 Acronyms

BDM	Beginning of Data Mark
CRC	Cyclic Redundancy Check
DRC	Diagonal Redundancy Check
ECC	Error Correcting Code
EDM	End of Data Mark
ID	Identifier
LDR	Logical Data Record
NB-SNR	Narrow Band Signal-to-Noise Ratio
PDR	Processed Data Record
RBW	Resolution BandWidth
SRA	Standard Reference Amplitude
STA	Short Term Average
TCR	Transform Change Record
UDR	User Data Record
VBW	Video BandWidth
VRC	Vertical Redundancy Code

## 3 REFERENCES

- ECMA-13: File Structure and Labelling of Magnetic Tapes for Information Interchange  
 ECMA-120: Data Interchange on 12,7 mm 18-Track Magnetic Tape

ISO 1302: Method for indicating surface structure on technical drawings

ISO 683/XIII: Wrought stainless steels

International Register of Processing Algorithms (*to be established*)

## 4 DEFINITIONS

For the purpose of this Standard, the following definitions apply.

### 4.1 Algorithm

A set of rules for transforming the logical representation of data.

### 4.2 Average Signal Amplitude

The average peak-to-peak value of the signal output of the read head measured over a minimum length of track of 25,4 mm exclusive of missing pulses.

### 4.3 Back Surface

The surface of the tape opposite the magnetic coating used to record data.

### 4.4 Byte

An ordered set of eight bits acted upon as a unit.

### 4.5 Cartridge

A container holding a supply reel of magnetic tape with an attached leader block.

### 4.6 Cyclic Redundancy Check Character

A character represented by two bytes, placed at the end of a byte string and used for error detection.

### 4.7 Data Block

The data entity resulting from concatenating one or more Packets, and appending control information.

### 4.8 Data Records

#### 4.8.1 Processed Data Record (PDR)

The data entity resulting from the application of an Algorithm to a Logical Data Record.

#### 4.8.2 Host Data Record

The data entity originally compiled by the host.

#### 4.8.3 Logical Data Record (LDR)

The data entity received by the system from the host. It may consist of one or several Host Data Record(s) depending upon action taken by the host to use extended blocks.

#### 4.8.4 User Data Record (UDR)

The data entity available to the Packet Former.

When the data has been processed it shall be a PDR.

When the data has not been processed it shall be an LDR.

### 4.9 Error Correcting Code

A mathematical procedure yielding bits used for the detection and correction of errors.



- 4.10 Flux Transition Position**  
That point which exhibits maximum free-space flux density normal to the surface of the tape.
- 4.11 Flux Transition Spacing**  
The distance along a track between successive flux transitions.
- 4.12 Magnetic Tape**  
A tape which will accept and retain the magnetic signals intended for input, output and storage purposes on computers and associated equipment.
- 4.13 Master Standard Reference Tape**  
A tape selected as the standard for Reference Field, Signal Amplitude, Resolution and Overwrite.
- NOTE 2**  
*A Master Standard Reference Tape is being established at the National Institute for Standards and Technology (NIST).*
- 4.14 Packet**  
A UDR with a Packet Identifier and Packet Trailer added.
- 4.15 Packet Identifier**  
The group of 32 bytes added to the beginning of a UDR when forming a Packet.
- 4.16 Packet Trailer**  
The group of bytes of variable size appended to a UDR when forming a Packet.
- 4.17 Physical Recording Density**  
The number of recorded flux transitions per unit length of track, expressed in flux transitions per millimetre (ftpm).
- 4.18 Postamble**  
A repeated 9-bit pattern at the end of a Recorded Data Block providing electronic synchronization when reading in the reverse direction.
- 4.19 Preamble**  
A repeated 9-bit pattern at the beginning of a Recorded Data Block providing electronic synchronization when reading in the forward direction.
- 4.20 Processed Data**  
Data which has been processed by an Algorithm.
- 4.21 Processing**  
The use of an Algorithm.
- 4.22 Reference Field**  
The Typical Field of the Master Standard Reference Tape.
- 4.23 Secondary Standard Reference Tape**  
A tape the performance of which is known and stated in relation to that of the Master Standard Reference Tape.

**NOTE 3**

*Secondary Standard Reference Tapes are being developed at the National Institute for Standards and Technology (NIST) and will be available from the NIST Office of Standard Reference Materials, Room 205, Building 202, National Institute of Standards and Technology, Gaithersburg, MA 20899, USA.*

*It is intended that these be used for calibrating tertiary reference tapes for use in routine calibration.*

**4.25 Standard Reference Amplitude (SRA)**

The Average Signal Amplitude from the Master Standard Reference Tape when it is recorded with the Test Recording Current on the NIST measurement system at 972 ftpmm.

Traceability to the Standard Reference Amplitude is provided by the calibration factors supplied with each Secondary Standard Reference Tape.

**4.26 Standard Reference Current**

The current that produces the Reference Field.

**4.27 Test Recording Current**

The current that is 1,5 times the Standard Reference Current.

**4.28 Track**

A longitudinal area on the tape along which a series of magnetic signals may be recorded.

**4.29 Typical Field**

In the plot of the Average Signal Amplitude against the Recording Field at the physical recording density of 972 ftpmm, the minimum field that causes an Average Signal Amplitude equal to 85% of the maximum Average Signal Amplitude.

**4.30 Transformation**

The manipulation of Host Data Records before formatting. It includes the operations of Processing, the formation of Packets and the concatenation of Packets.

**5 ENVIRONMENT AND SAFETY**

Unless otherwise stated, the conditions specified below refer to the ambient conditions in the test or computer room and not to those within the tape equipment.

**5.1 Cartridge/Tape Testing Environment**

Unless otherwise stated, tests and measurements made on the tape cartridge to check the requirements of this Standard shall be carried out under the following conditions:

Temperature:	23 °C ± 2 °C
Relative Humidity:	40 % to 60 %
Conditioning period before testing:	24 hours.

**5.2 Cartridge Operating Environment**

Cartridges used for data interchange shall be capable of operating under the following conditions:

Temperature:	16 °C to 32 °C
Relative Humidity:	20 % to 80 %



Wet Bulb Temperature: 25 °C max.

The average temperature of the air immediately surrounding the tape shall not exceed 40,5 °C.

**NOTE 4**

*Localized tape temperatures in excess of 49 °C may cause tape damage.*

Conditioning before operating: If a cartridge has been exposed during storage and/or transportation to conditions outside the above values, it shall be conditioned for a period of at least 24 hours.

**5.3 Cartridge Storage Environment**

Cartridges used for data interchange shall be stored under the following conditions.

Temperature: 5 °C to 32 °C

Relative Humidity: 5 % to 80 %

Wet Bulb Temperature: 26 °C max.

**5.4 Safety Requirements**

**5.4.1 Safeness**

The cartridge and its components shall not constitute any safety or health hazard when used in its intended manner or in any foreseeable misuse in an information processing system.

**5.4.2 Flammability**

The cartridge and its components shall be made from materials which, if ignited from a match flame, and when so ignited do not continue to burn in a still carbon dioxide atmosphere.

**5.5 Transportation**

This Standard does not specify parameters for the environment in which cartridges should be transported. Appendix A gives some recommendations for transportation.

**SECTION II - CHARACTERISTICS OF THE TAPE**

**6 CHARACTERISTICS OF THE TAPE**

**6.1 Material**

The tape shall consist of a base material (oriented polyethylene terephthalate film or its equivalent) coated on one side with a strong yet flexible layer of ferromagnetic material dispersed in a suitable binder. The back surface of the tape may also be coated with a ferromagnetic or non-ferromagnetic material.

**6.2 Tape Length**

The length of the tape shall not be less than 165 m.

**6.3 Tape Width**

The width of the tape shall be 12,650 mm  $\pm$  0,025 mm. The width shall be measured across the tape from edge-to-edge when the tape is under a tension of less than 0,28 N.

**6.4 Tape Discontinuity**

There shall be no discontinuities in the tape such as those produced by tape splicing or perforations.

**6.5 Total Thickness of Tape**

The total thickness of the tape at any point shall be between 0,0259 mm and 0,0337 mm.

**6.6 Base Material Thickness**

The thickness of the base material shall be 0,0234 mm nominal.

**6.7 Longitudinal Curvature**

The radius of curvature of the edge of the tape shall not be less than 33 m.

**Procedure**

Allow a 1 m length of tape to unroll and assume its natural curvature on a flat smooth surface. Measure the deviation from a 1 m chord. The deviation shall not be greater than 3,8 mm. This deviation corresponds to the minimum radius of curvature of 33 m if measured over an arc of circle.

**6.8 Out-of-Plane Distortions**

All visual evidence of out-of-plane distortion shall be removed when the tape is subjected to a uniform tension of 0,6 N. Out-of-plane distortions are local deformations which cause portions of the tape to deviate from the plane of the surface of the tape. Out-of-plane distortions are most readily observed when the tape is lying on a flat surface under no tension.

**6.9 Cupping**

The departure across the width of tape from a flat surface shall not exceed 0,3 mm.

**Procedure**

Cut a 1,0 m  $\pm$  0,1 m length of tape. Condition it for a minimum of 3 hours in the test environment by hanging it so that the coated surface is freely exposed to the test environment. From the centre portion of the conditioned tape cut a sample of 25 mm length. Stand the sample on its end in a cylinder which is at least 25 mm high with an inside diameter of 13,0 mm  $\pm$  0,2 mm. With the cylinder standing on an optical comparator measure the cupping by aligning the edges of the sample to the reticle and determining the distance from the aligned edges to the corresponding surface of the sample at its centre.

**6.10 Dynamic Frictional Characteristics**

In the tests of 6.10.1 and 6.10.2 the specified forces of 1,0 N and 1,50 N, respectively, comprise both the force component of the dynamic friction and the force of 0,64 N applied to the sample of tape.

**NOTE 5**

*Particular attention should be given to keeping the surfaces clean.*

**6.10.1 Frictional Drag Between the Recording Surface and the Tape Back Surface**

The force required to move the recording surface in relation to the back surface shall not be less than 1,0 N.

**Procedure**

- i) Wrap a sample of tape around a 25,4 mm diameter circular mandrel with the back surface of the sample facing outwards.
- ii) Place a second sample of tape, with the recording surface facing inwards, around the first sample for a total wrap angle of 90°.



- iii) Apply a force of 0,64 N to one end of the outer sample of tape. Secure its other end to a force gauge which is mounted on a motorized linear slide.
- iv) Drive the slide at a speed of 1 mm/s.

#### 6.10.2 Frictional Drag Between the Tape Recording Surface and Ferrite after Environmental Cycling

The force required to move the tape at a point 1,34 m from the leader block of the cartridge shall not be greater than 1,50 N. The force required at a point 4,3 m from the junction of the tape with the cartridge hub shall not exceed the first force by more than a factor of 4.

##### Procedure

- i) Wind tape on to a spool hub of diameter 50 mm to an outside diameter of 97 mm with a winding tension of  $2,2 \text{ N} \pm 0,2 \text{ N}$ .
- ii) Repeat the following two steps five times:
  - a) Store for 48 hours at a temperature of  $50^\circ \text{C}$  and a relative humidity of 10% to 20%.
  - b) Acclimatize in the testing environment for two hours and rewind with a tension of  $2,2 \text{ N} \pm 0,2 \text{ N}$ .
- iii) Acclimatize the tape for 48 hours at a temperature of  $30,5^\circ \text{C}$  and a relative humidity of 85%. The tape shall remain in this environment for steps iv) and v).
- iv) Apply a force of 0,64 N to one end of a sample of not more than 1 m, taken 1,34 m from the leader block. Pass the sample over a ferrite rod of diameter 25,4 mm with the recording surface in contact with the rod for a total wrap angle of  $90^\circ$ .  
  
The rod shall be made from the ferrite specified in Appendix C. It shall be polished to a roughness value  $R_a$  of  $0,05 \mu\text{m}$  (roughness grade N2, ISO 1302). Pull the other end of the sample horizontally at 1 mm/s.
- v) Repeat step iv) for a similar sample taken 4,3 m from the junction of the tape with the cartridge hub.

#### 6.11 Coating Adhesion


The force required to peel any part of the coating from the tape base material shall not be less than 1,5 N.

##### Procedure

- i) Take a sample of the tape approximately 380 mm long and scribe a line through the recording coating across the width of the tape 125 mm from one end.
- ii) Using a double-sided pressure sensitive tape, attach the full width of the sample to a smooth metal plate, with the recording surface facing the plate, as shown in the figure below.
- iii) Fold the sample over  $180^\circ$ , attach the metal plate and the free end of the sample to the jaws of a universal testing machine and set the speed of the jaw separation to 254 mm per min.
- iv) Note the force at which any part of the coating first separates from the base material. If this is less than 1,5 N, the test has failed. If the sample peels away from the double-sided

pressure sensitive tape before the force exceeds 1,5 N, an alternative type of double-sided pressure sensitive tape shall be used.

- v) If the back surface of the tape is coated, repeat i) to iv) for the back coating.

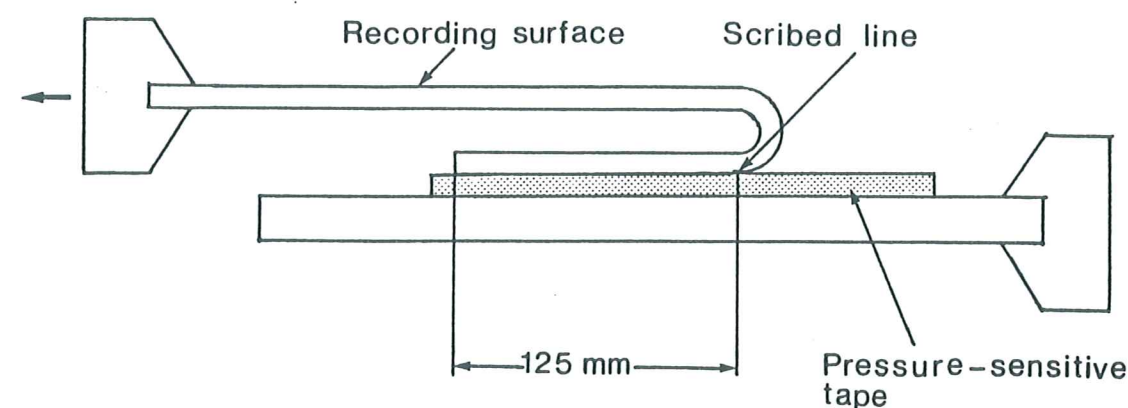

#### 6.12 Flexural Rigidity

The flexural rigidity of the tape in the longitudinal direction shall be between  $0,06 \text{ N.mm}^2$  and  $0,16 \text{ N.mm}^2$ .

##### Procedure

Clamp a 180 mm sample of tape in a universal testing machine, allowing a 100 mm separation between the machine jaws. Set the jaw separation speed at 5 mm per minute. Plot force against distance. Calculate the flexural rigidity using the slope of the curve between 2,2 N and 6,7 N. The calculation is :

$$E = \frac{\delta F / WT}{\delta L / L}$$

$$I = WT^3 / 12$$

$$\text{Flexural rigidity} = EI = \frac{\delta FT^2}{12\delta L / L}$$

Where:

$\delta F$  = change in force in N

$T$  = measured thickness in mm

$W$  = measured width in mm

$\delta L / L$  = change in sample length between the jaws divided by the original length between the jaws.

#### 6.13 Electrical Resistance of Coated Surfaces

The electrical resistance of any square area of the recording surface shall be within the range:

-  $10^5 \Omega$  to  $5 \times 10^8 \Omega$  for non-backcoated tapes,




- $10^5 \Omega$  to  $5 \times 10^9 \Omega$  for backcoated tapes.

The electrical resistance of any backcoating shall be less than  $10^6 \Omega$ .

#### Procedure

Condition a sample of tape to the test environment for 24 hours. Position the sample over two 24-carat gold-plated, semi-circular electrodes having a radius  $R = 25,4$  mm and a finish of at least N4, so that the recording surface is in contact with each electrode. These electrodes shall be placed parallel to the ground and parallel to each other at a distance  $d = 12,7$  mm between their centres. Apply a force  $F$  of 1,62 N to each end of the sample. Apply a DC voltage of  $500 \text{ V} \pm 10 \text{ V}$  across the electrodes and measure the resulting current flow. From this value, determine the electrical resistance.

Repeat for a total of 5 positions along the sample and average the 5 resistance readings. For back-coated tape repeat the procedure with the backcoating in contact with the electrodes.

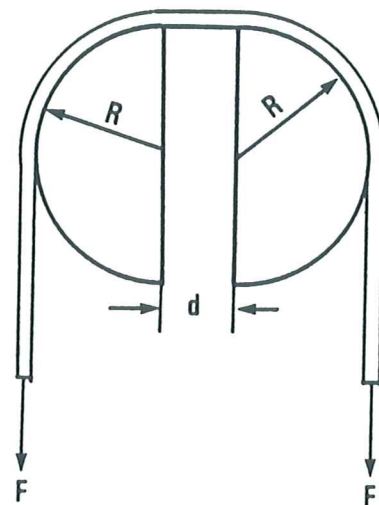

When mounting the sample, make sure that no conducting paths exist between the electrodes except that through the coating under test.

#### NOTE 6

*Particular attention should be given to keeping the surfaces clean.*

#### 6.14 Tape Durability

This Standard does not specify parameters for assessing tape durability.

However, a recommended procedure is described in Appendix D.

#### 6.15 Inhibitor Tape

This Standard does not specify parameters for assessing whether or not a tape is an inhibitor tape.

However, Appendix B gives further information on inhibitor tapes.

#### 6.16 Tape Abrasivity

Tape abrasivity is the tendency of the tape to wear the tape transport. The length of the wear pattern on a wear bar shall not exceed  $56 \mu\text{m}$  when measured as specified in Appendix C.

#### 6.17 Pre-recording Condition

Prior to recording data, or to testing, the tape shall have been erased utilizing alternating fields of decaying levels (anhysteretic process) to ensure that the remanent magnetic moment of the recording surface does not exceed 20% of the maximum remanent magnetic moment. Appendix E specifies the method of measurement.

In addition no low density transitions shall be present on the tape.

#### 6.18 Magnetic Recording Characteristics

The magnetic recording characteristics shall be as follows.

When performing these tests, the output or resultant signal shall be measured on the same relative pass for both a tape calibrated to the Master Standard Reference Tape and the tape under test (read-while-write or first forward-read-pass) on the same equipment.

The following conditions shall apply to the testing of all magnetic recording characteristics, unless otherwise noted.

- Tape condition : pre-recording condition
- Tape speed : not greater than 2,5 m/s
- Read-track : within the written track
- Azimuth alignment : not greater than  $6^\circ$  between the mean write transitions and the read gap
- Write-gap length :  $1,4 \mu\text{m} \pm 0,2 \mu\text{m}$
- Write head saturation density :  $0,34 \text{ T} \pm 0,03 \text{ T}$
- Tape tension :  $2,2 \text{ N} \pm 0,2 \text{ N}$
- Recording current : Test Recording Current

#### 6.18.1 Typical Field

The Typical Field of the tape shall be between 90% and 110% of the Reference Field.

Traceability to the Reference Field is provided by the calibration factors supplied with each Secondary Standard Reference Tape.

#### 6.18.2 Signal Amplitude

The average signal amplitude at the physical recording density of 972 ftpmm shall be between 70% and 140% of the SRA.

Traceability to the SRA is provided by the calibration factors supplied with each Secondary Standard Reference Tape.

#### 6.18.3 Resolution

The ratio of the Average Signal Amplitude at the physical recording density of 1458 ftpmm to that at the physical recording density of 972 ftpmm shall be between 80% and 120% of the same ratio for the Master Standard Reference Tape.

Traceability to the resolution of the Master Standard Reference Tape is provided by the calibration factors supplied with each Secondary Standard Reference Tape.



#### 6.18.4 Overwrite

Overlap is the ratio of the Average Signal Amplitude of the residual of the fundamental frequency of a tone pattern after being overwritten at 972 ftpmm to the Average Signal Amplitude of the 972 ftpmm signal. The Average Signal Amplitude of the tone pattern is the peak-to-peak amplitude of the sinusoidal signal with equal rms power.

##### 6.18.4.1 Requirement

The overlap for the tape shall be less than 120% of the overlap for the Master Standard Reference Tape.

Traceability to the overlap of the Master Standard Reference Tape is provided by the calibration factors supplied with each Secondary Standard Reference Tape.

##### 6.18.4.2 Procedure

A tone pattern shall be recorded which shall be the following sequence of flux transitions.



where:  $a_1 = 1,029 \mu\text{m}$   
 $a_2 = 0,514 \mu\text{m}$

A 972 ftpmm signal is then recorded over the tone pattern. Measure the Average Signal Amplitude of the residual of the fundamental frequency of the tone pattern (one sixth of the frequency of the 972 ftpmm signal) and the Average Signal Amplitude of the 972 ftpmm signal. Both amplitude measurements should be made using suitable filters.

#### 6.18.5 Narrow-Band Signal-to-Noise Ratio (NB-SNR)

The narrow-band signal-to-noise ratio is the average signal amplitude rms power divided by the average integrated (side band) rms noise power, and is expressed in dB.

##### 6.18.5.1 Requirement

The NB-SNR shall be equal to, or greater than, 30 dB when normalized to a track width of 410  $\mu\text{m}$ . The normalization factor is  $\text{dB}(410) = \text{dB}(W) + 10 \log 410/W$ , where  $W$  is the track width used when measuring  $\text{dB}(W)$ .

##### 6.18.5.2 Procedure

The NB-SNR shall be measured using a spectrum analyzer with a resolution bandwidth (RBW) of 1 kHz and a video bandwidth (VBW) of 10 Hz. The tape speed shall be 762 mm/s for the frequencies specified below.

The NB-SNR shall be measured as follows:

- Measure the read-signal amplitude of the 972 ftpmm signal, taking a minimum of 150 samples over a length of tape of 46 m minimum.
- On the next pass (read only) measure the rms noise power over the same section of tape and integrate the rms noise power (normalizing for the actual resolution bandwidth) over the range from 332 kHz to 366 kHz.

For other tape speeds all the frequencies shall be linearly scaled.

#### 6.19 Tape Quality

The tape quality (including the effects of exposure to storage and transportation environments) is defined by the testing requirements given in the following clauses. The following conditions shall apply to all quality testing requirements.

- Environment : operating environment
- Tape condition : pre-recording condition
- Tape speed : 2 m/s
- Read-track width : 410  $\mu\text{m}$
- Physical recording density : 972 ftpmm
- Write-gap length : 1,4  $\mu\text{m} \pm 0,2 \mu\text{m}$
- Azimuth alignment : not greater than 6' between the mean write transitions and the read gap
- Write head saturation density : 0,34 T  $\pm$  0,03 T
- Recording current : Test Recording Current
- Format : 18 tracks
- Tape tension : 2,2 N  $\pm$  0,2 N

##### 6.19.1 Missing Pulses

A missing pulse is a loss of read signal amplitude. A missing pulse exists when the base-to-peak read signal amplitude is 25%, or less, of half the Average Signal Amplitude for the preceding 25,4 mm of tape.

##### 6.19.2 Missing Pulse Zones

A missing pulse zone begins with a missing pulse and ends when 64 consecutive flux transitions are detected or a length of 1 mm of tape has been measured.

The missing pulse zone rate shall be less than one in  $8 \times 10^6$  flux transitions recorded.

##### 6.19.3 Coincident Missing Pulse Zones

There are two 9-track groups in the 18-track format. One group comprises the odd-numbered tracks, the other group comprises the even-numbered tracks. A simultaneous missing pulse zone condition on two or more tracks of a 9-track group is a coincident missing pulse zone.

If a coincident missing pulse zone occurs at the same time in both groups of tracks, it shall be considered as a single coincident missing pulse zone. Its length shall begin with the start of the earliest coincident missing pulse zone and terminate with the end of the latest coincident missing pulse zone.

No 165 m length of tape shall have more than 12 coincident missing pulse zones.

No coincident missing pulse zone shall exceed 50 mm.

### SECTION III - CARTRIDGE

#### 7 DIMENSIONAL AND MECHANICAL CHARACTERISTICS OF THE CARTRIDGE

The cartridge shall consist of the following elements:



- a case,
- a reel for the magnetic tape,
- a magnetic tape wound on the hub of the reel,
- a locking mechanism for the reel,
- a write-inhibit mechanism,
- a leader block,
- a latching mechanism for the leader block.

Dimensional characteristics are specified for those parameters deemed mandatory for interchange and compatible use of the cartridge. Where there is freedom of design, only the functional characteristics of the elements described are indicated. In the enclosed drawings a typical implementation is represented in third angle projection.

Where they are purely descriptive the dimensions are referred to three Reference Surfaces A, B and C forming a geometrical trihedral (see figure 1). Where the dimensions are related to the position of the cartridge in the drive, they may be referred to another surface of the cartridge. Figures 2 to 9 show the dimensions of the empty case.

- Figure 1 is a general view of the whole cartridge.
- Figure 2 shows the front side of the case which lies on Reference Surface A.
- Figure 3 shows the top side of the case.
- Figure 4 shows the rear side of the case.
- Figure 5 shows the bottom side of the case which lies in Reference Surface C.
- Figure 6 shows the side of the case which lies in Reference Surface B.
- Figure 7 shows an enlarged view of a part of figure 2.
- Figure 8 shows an enlarged cross-section of a location notch.
- Figure 9 shows an enlarged cross-section of a detail of the opening of the case.
- Figure 10 shows an enlarged partial cross-section of the cartridge in hand.
- Figure 11 shows the same cross-section as figure 9 but of the cartridge in the drive.
- Figure 12 shows schematically the teeth of the toothed rim.
- Figure 13 shows two views and an enlarged cross-section of the leader block.
- Figure 14 shows the fixation of the tape to the leader block.
- Figure 15 shows the leader block inserted in the case.

#### 7.1 Overall Dimensions (figures 2 to 4)

The overall dimensions of the case shall be

$$L_1 = 125,00 \text{ mm} \pm 0,32 \text{ mm}$$

$$L_2 = 109,00 \text{ mm} \pm 0,32 \text{ mm}$$

$$L_3 = 24,50 \text{ mm} \begin{cases} + 0,50 \text{ mm} \\ - 0,32 \text{ mm} \end{cases}$$

The corners of the case shall be rounded off as specified by

$$R_1 = 3,00 \text{ max.}$$

$$R_2 = 4,00 \text{ max.}$$

$$R_3 = 3,00 \text{ min.}$$

#### 7.2 Write-inhibit Mechanism (figures 2 and 3)

The write-inhibit mechanism shall have a flat surface identified by a visual mark, e.g. a white spot, when in the position in which writing is inhibited. This Standard does not prescribe the actual implementation of the write-inhibit mechanism. For example, it can be a rotatable or a slidable element.

The front side of the case shall have a window specified by

$$L_4 = 11,80 \text{ mm} \pm 0,25 \text{ mm}$$

$$L_5 = 15,60 \text{ mm} \pm 0,25 \text{ mm}$$

$$L_6 = 7,40 \text{ mm} \pm 0,25 \text{ mm}$$

$$L_7 = 12,00 \text{ mm} \pm 0,25 \text{ mm}$$

In the write-inhibit position the flat surface of the write-inhibit mechanism shall be behind this window at a distance

$$L_8 = 2,55 \text{ mm min.}$$

from the front side of the case.

In the write-enable position this surface shall be within 0,25 mm of the front side of the case.

The force required for the operation of the write-inhibit mechanism shall be in the range

$$2 \text{ N to } 9 \text{ N}$$

when applied tangentially to the surface of the case.

#### 7.3 Label Area of the Rear Side (figures 3 to 4)

On the rear side of the case there shall be a label area specified by

$$L_9 = 7,00 \text{ mm} \pm 0,25 \text{ mm}$$

$$L_{10} = 80,00 \text{ mm} \begin{cases} + 0,30 \text{ mm} \\ - 0,16 \text{ mm} \end{cases}$$

$$L_{11} = 12,30 \text{ mm} \pm 0,25 \text{ mm}$$

$$L_{12} = 0,50 \text{ mm} \pm 0,25 \text{ mm}$$

$$R_4 = 1,00 \text{ mm max.}$$

#### 7.4 Label Area of the Top Side (figure 3)

On the top side of the case there shall be a label area, recessed by  $0,50 \text{ mm} \pm 0,25 \text{ mm}$ , specified by  $L_9$ ,  $L_{10}$ ,  $L_{12}$  and in addition by

$$L_{13} = 31,00 \text{ mm} \pm 0,25 \text{ mm}$$

$$L_{14} = 75,00 \text{ mm} \begin{cases} + 0,30 \text{ mm} \\ - 0,16 \text{ mm} \end{cases}$$

## 7.5 Case Opening (figures 2, 3, 5 and 7)

The case shall have an opening for the tape in which the leader block can be inserted (see also figure 15). This opening shall be specified by

$$L_{15} = 4,70 \text{ mm} \pm 0,25 \text{ mm}$$

$$L_{16} = 14,90 \text{ mm} \pm 0,32 \text{ mm}$$

$$L_{17} = 7,50 \text{ mm} \pm 0,25 \text{ mm}$$

$$L_{18} = 87,10 \text{ mm} \pm 0,25 \text{ mm}$$

$$L_{19} = 4,00 \text{ mm} \pm 0,25 \text{ mm}$$

$$R_5 = 4,00 \text{ mm} \pm 0,25 \text{ mm}$$

$$\alpha = 50^\circ \pm 1^\circ$$

Moreover, figure 7 shows at a larger scale the details of the configuration of the case opening as seen at the right-hand side of figure 2.

$$L_{61} = 3,9 \text{ mm} \pm 0,5 \text{ mm}$$

$$L_{62} = 16,9 \text{ mm} \left\{ \begin{array}{l} + 0,5 \text{ mm} \\ - 0,4 \text{ mm} \end{array} \right.$$

$$L_{63} = 3,0 \text{ mm} \pm 0,5 \text{ mm}$$

$$L_{64} = 11,6 \text{ mm} \pm 0,5 \text{ mm}$$

$$\omega_1 = 1^\circ \pm 30'$$

$$\omega_2 = 20^\circ \pm 2^\circ$$

## 7.6 Locating Notches (figures 5, 6 and 8)

There shall be two locating notches open towards the bottom side. These location notches shall be specified by

$$L_{20} = 106,00 \text{ mm} \pm 0,25 \text{ mm}$$

$$L_{21} = 5,00 \text{ mm} \pm 0,25 \text{ mm}$$

$$L_{22} = 7,00 \text{ mm} \pm 0,25 \text{ mm}$$

$$L_{23} = 104,00 \text{ mm} \pm 0,25 \text{ mm}$$

$$L_{24} = 2,50 \text{ mm} \pm 0,25 \text{ mm}$$

$$\beta = 1^\circ 30' \pm 30'$$

$$\gamma = 2^\circ \pm 30'$$

## 7.7 Locating Areas (figure 5)

The bottom side of the case shall have three circular locating areas  $a_1$ ,  $a_2$  and  $a_3$  which shall lie in the same horizontal plane within 0,25 mm.

Areas  $a_1$  and  $a_2$  shall have a diameter of  $10,00 \text{ mm} \pm 0,25 \text{ mm}$ . The position of their centre shall be specified by

$$L_{25} = 108,50 \text{ mm} \pm 0,25 \text{ mm}$$

$$L_{26} = 3,50 \text{ mm} \pm 0,25 \text{ mm}$$

$$L_{27} = 105,50 \text{ mm} \pm 0,25 \text{ mm}$$

Area  $a_3$  shall have a diameter of  $14,00 \text{ mm} \pm 0,25 \text{ mm}$ . The position of its centre shall be specified by

$$L_{28} = 31,25 \text{ mm} \pm 0,25 \text{ mm}$$

$$L_{29} = 54,50 \text{ mm} \pm 0,25 \text{ mm}$$

## 7.8 Inside Configuration of the Case around the Case Opening (figures 5 and 9)

Figures 5 and 9 show the inside configuration of the case around the opening of the case. This configuration shall be defined as follows (see also 7.10)

$$L_{30} = 3,30 \text{ mm} \pm 0,25 \text{ mm}$$

$$L_{31} = 18,40 \text{ mm} \pm 0,25 \text{ mm}$$

$$R_6 = 1,50 \text{ mm} \pm 0,25 \text{ mm}$$

$$R_7 = 1,50 \text{ mm} \pm 0,25 \text{ mm}$$

The oblique edge of the case shall be tangential to the arc of circle defined by  $R_6$  at an angle

$$\lambda = 40^\circ \pm 30'$$

## 7.9 Other External Dimensions of the Case (figure 6)

The external form of the case shall be further specified by

$$L_{32} = 113,2 \text{ mm} \pm 0,3 \text{ mm}$$

$$L_{33} = 26,00 \text{ mm} \pm 0,25 \text{ mm}$$

$$R_8 = 145,50 \text{ mm} \pm 0,25 \text{ mm}$$

$$R_9 = 145,50 \text{ mm} \pm 0,25 \text{ mm}$$

$$\delta = 30^\circ \pm 30'$$

## 7.10 Central Window (figure 5)

The bottom side of the case shall have a central window. The location of its centre shall be specified by  $L_{29}$  and

$$L_{34} = 61,00 \text{ mm} \pm 0,25 \text{ mm}$$

Its diameter shall be

$$d_1 = 43,5 \text{ mm} \left\{ \begin{array}{l} + 2,0 \text{ mm} \\ - 1,0 \text{ mm} \end{array} \right.$$

The angle with its apex at the centre of this window and formed by the two lines tangential to the parts shown in figure 5 in cross-section shall be

$$\theta = 16^\circ \pm 30'$$

## 7.11 Stacking Ribs

The bottom side of the case shall have two parallel stacking ribs. Their dimensions shall be

$$L_{35} = 5,00 \text{ mm} \pm 0,25 \text{ mm}$$

$$L_{36} = 1,00 \text{ mm} \pm 0,16 \text{ mm}$$

$$L_{37} = 74,50 \text{ mm} \pm 0,25 \text{ mm}$$



Their locations shall be

$$L_{38} = 31,00 \text{ mm} \pm 0,25 \text{ mm}$$

$$L_{39} = 7,50 \text{ mm} \pm 0,32 \text{ mm}$$

$$L_{40} = 79,50 \text{ mm} \pm 0,25 \text{ mm}$$

## 7.12 Flexibility of the Case

The flexibility of the top and bottom sides of the case (see figure 1) is the amount of deflection observed when they are submitted to a perpendicular force  $F$ .

### 7.12.1 Requirements

The amount of deflection  $d$  shall meet the following requirements:

Deflection of the top side:

$$0,0256 F \leq d \leq 0,38 + 0,054 F$$

Deflection of the bottom side:

$$0,0228 F \leq d \leq 0,38 + 0,040 F$$

where:

$d$  is the measured deflection in millimetres.

$$4,5 \text{ N} \leq F \leq 54,0 \text{ N}$$

### 7.12.2 Procedure

The flexibility of the case shall be measured in a universal testing machine operating in the compression mode. A suitable load cell shall be used for the test. A single point load with a radius of  $10 \text{ mm} \pm 1 \text{ mm}$  shall be applied on the bottom and subsequently on the top of the cartridge at the points shown in figure 3 and figure 5, and specified by

$$L_{65} = 86,9 \text{ mm nominal}$$

$$L_{66} = 54,5 \text{ mm nominal}$$

## 7.13 Tape Reel (figures 10 and 11)

Figures 10 and 11 show the tape reel mounted within the case. Figure 10 specifies the different dimensions of the reel when the cartridge is in hand, figure 11 when it is within the drive. For the sake of clarity of the drawing the stacking ribs are not shown in figures 10 and 11.

### 7.13.1 Locking mechanism (figure 11)

This Standard does not specify the actual implementation of the locking mechanism. However, functionally it shall satisfy the following requirements in the locked position:

- the angular resolution shall not be greater than  $6^\circ$ ,
- the reel shall not rotate by more than  $10^\circ$  when a torque not greater than  $0,32 \text{ N.m}$  is applied in the direction that will cause the tape to unwind.

The button of the locking mechanism shall be made of nylon 6/6 with  $2 \% \pm 1 \%$  molybdenum disulphide.

Its dimensions shall be

$$d_9 = 2,0 \text{ mm} \pm 0,5 \text{ mm}$$

$$d_{10} = 10,0 \text{ mm} \pm 0,2 \text{ mm}$$

$$\rho = 15^\circ \pm 2^\circ$$

### 7.13.2 Axis of rotation of the reel

The axis of rotation of the reel shall be perpendicular to plane P (see figure 12 and 7.13.7) and pass through the centre of the central window as specified by  $L_{29}$  and  $L_{34}$ .

### 7.13.3 Metallic insert

The reel shall have a metallic insert made of stainless steel (ISO 683/XIII, type 3 or 7). It shall withstand a pull out force of  $300 \text{ N min.}$  Its dimensions shall be

$$d_2 = 35,00 \text{ mm} \left\{ \begin{array}{l} + 0,20 \text{ mm} \\ - 1,20 \text{ mm} \end{array} \right.$$

$$d_3 = 11,15 \text{ mm} \pm 0,05 \text{ mm}$$

$$e_1 = 1,51 \text{ mm} \pm 0,10 \text{ mm}$$

Its central opening (diameter  $d_3$ ) shall be concentric with the axis of rotation of the reel within  $0,15 \text{ mm}$ .

The metallic insert shall be parallel to plane P within  $0,15 \text{ mm}$ .

### 7.13.4 Toothed rim

The reel shall have a toothed rim accessible through the central window, and having the dimensions

$$d_4 = 36,00 \text{ mm} \left\{ \begin{array}{l} + 0,50 \text{ mm} \\ - 0,00 \text{ mm} \end{array} \right.$$

$$d_5 = 41,00 \text{ mm} \pm 0,25 \text{ mm}$$

$$\psi = 11^\circ 3' \pm 5'$$

### 7.13.5 Hub of the reel

The hub of the reel shall have a diameter

$$d_6 = 50,0 \text{ mm} \left\{ \begin{array}{l} + 0,0 \text{ mm} \\ - 0,2 \text{ mm} \end{array} \right.$$

Further dimensions of the hub shall be

$$L_{41} = 13,05 \text{ mm} \left\{ \begin{array}{l} + 0,20 \text{ mm} \\ - 0,10 \text{ mm} \end{array} \right.$$

when measured at the hub surface, and

$$R_{10} = 0,08 \text{ mm max.}$$

The hub shall meet the following requirements:

- the straightness of the hub surface shall be within  $0,04 \text{ mm}$ ,
- the perpendicularity to the plane P through the pitch line of the teeth of the rim (see 7.13.7) shall be within  $0,07 \text{ mm}$ ,



- the ratio of the difference in the diameters  $d_6$  of any two sections (perpendicular to the axis) to the distance between these sections shall not exceed 0,0038,
- the rate of change across the width of the hub surface shall not exceed 0,025 mm per mm,
- the total runout of the hub related to the cylinder perpendicular to the circular pitch line (see 7.13.7) of the teeth of the toothed rim shall not exceed 0,2 mm total indicator reading (TIR).

### 7.13.6 Relative positions

#### 7.13.6.1 With the cartridge in hand (figure 10):

- the distance of the tip of the button of the locking mechanism to Reference Surface C shall be

$$L_{42} = 1,90 \text{ mm} \begin{cases} + 1,40 \text{ mm} \\ - 0,90 \text{ mm} \end{cases}$$

- the distance from the bottom surface of the metallic insert to Reference Surface C shall be

$$L_{43} = 0,4 \text{ mm} \begin{cases} + 1,0 \text{ mm} \\ - 0,5 \text{ mm} \end{cases}$$

#### 7.13.6.2 Whether the cartridge is in hand or in the drive (figures 10 and 11):

- the distance from the bottom surface of the metallic insert to plane P shall be

$$L_{44} = 2,27 \text{ mm} \pm 0,12 \text{ mm}$$

- the distance of the inside of the lower flange of the reel to plane P shall be

$$L_{45} = 0,65 \text{ mm} \pm 0,09 \text{ mm}$$

#### 7.13.6.3 With the cartridge in the drive (figure 11):

- the distance from the tip of the button of the locking mechanism to Reference Surface C shall be

$$L_{46} = 8,1 \text{ mm} \pm 0,2 \text{ mm}$$

- the force required to move the button into this position shall not exceed 12,25 N,

- the distance from the centreline of the tape to Reference Surface C shall be

$$L_{47} = 12,25 \text{ mm nominal}$$

- the distance from the Reference Surface C to plane P (see 7.13.7) shall be:

$$L_{60} = 5,04 \text{ mm} \pm 0,20 \text{ mm}$$

### 7.13.7 Characteristics of the toothed rim (figure 12)

The toothed rim shall comprise 60 teeth spaced at an angle of

$$6^{\circ}0' \pm 5' \text{ non-cumulative}$$

The teeth are specified at the pitch diameter  $d_5$  by

$$L_{48} = 4 \text{ mm nominal}$$

$$L_{49} = 2 \text{ mm nominal}$$

$$\varphi = 30^{\circ} \text{ nominal}$$

The pitch line is the circumference of the teeth taken at the distance  $L_{49}$ . The plane in which it lies is the plane P mentioned above.

The blend radius at the bottom of the teeth shall be

$$R_{11} = 0,25 \text{ mm max.}$$

The blend radius at the tip of the teeth shall be

$$0,10 \text{ mm} \leq R_{12} \leq 0,30 \text{ mm}$$

### 7.14 Leader Block (figure 13)

The leader block shall have the following dimensions.

$$L_{50} = 31,80 \text{ mm} \pm 0,04 \text{ mm}$$

$$L_{51} = 6,8 \text{ mm} \pm 0,1 \text{ mm}$$

$$L_{52} = 21,8 \text{ mm} \pm 0,2 \text{ mm}$$

$$L_{53} = 10,93 \text{ mm} \begin{cases} + 0,06 \text{ mm} \\ - 0,08 \text{ mm} \end{cases}$$

$$L_{54} = 5,46 \text{ mm} \pm 0,10 \text{ mm}$$

$$L_{55} = 6,00 \text{ mm} \pm 0,25 \text{ mm}$$

$$L_{56} = 16,5 \text{ mm} \begin{cases} + 0,0 \text{ mm} \\ - 0,2 \text{ mm} \end{cases}$$

$$L_{57} = 5,2 \text{ mm} \pm 0,2 \text{ mm}$$

$$R_{13} = 25,00 \text{ mm} \pm 0,25 \text{ mm}$$

$$R_{14} = 1,4 \text{ mm} \pm 0,2 \text{ mm}$$

$$R_{15} = 5,50 \text{ mm} \pm 0,25 \text{ mm}$$

$$d_7 = 7,0 \text{ mm} \pm 0,2 \text{ mm}$$

$$d_8 = 4,0 \text{ mm} \pm 0,2 \text{ mm}$$

$$\mu_1 = 90^{\circ} \pm 2^{\circ}$$

$$\mu_2 = 8^{\circ} \begin{cases} + 0^{\circ} \\ - 3^{\circ} \end{cases}$$

$$\mu_3 = 44^{\circ} \begin{cases} + 0^{\circ} \\ - 3^{\circ} \end{cases}$$

### 7.15 Attachment of the Tape to the Leader Block (figure 14)

There shall be a cylindrical insert for attaching the tape to the leader block. It shall cover the full width of the tape and not protrude beyond the surfaces of the leader block.

In zone Z the bottom edge of the tape (as seen in figure 14) shall be parallel to the edge of the leader block within 0,12 mm and shall be at a distance

$$L_{58} = 1,90 \text{ mm} \pm 0,26 \text{ mm}$$

from it, when measured while the tape is under tension.

When fixed to the leader block the end of the tape shall not protrude above the surface of the leader block by more than

$$L_{59} = 2,5 \text{ mm}$$

The leader block shall remain attached to the tape when a force of 10 N is applied at an angle

$$\mu_4 = 38^\circ \pm 2^\circ$$

as shown in figure 14.

#### 7.16 Latching Mechanism (figure 15)

This Standard does not specify the actual implementation of the latching mechanism for the leader block. It specifies the position of the leader block and the forces required to pull out and to insert it.

When the leader block is latched into the case, the point defined by  $L_{51}$  and  $L_{54}$  (see figure 13) shall fall within a circle of radius 0,5 mm max. the centre of which is defined by the intersection of the two lines specified by the nominal values of  $L_{17}$  and  $L_{18}$  (see figure 3).

The pull-out force, i.e. the force required to pull the leader block and the tape attached to it out of the cartridge shall satisfy both following conditions:

- to be in the range 2,0 N to 7,5 N, and
- the product of the maximum value of the pull-out force and the displacement distance shall be less than 13 N.mm.

The insertion force shall be measured at the same angle and jaw separation speed as the pull-out force.

#### Procedure

Clamp the cartridge in a universal testing machine that can extract the leader block at the angle  $\mu_5$  starting at the pickup point (see figure 15). The leader block pickup point is located by the intersection of the centre lines positioned by dimensions  $L_{17}$ ,  $L_{18}$ . Set the jaw separation speed to 10 mm/min, pull the leader block allowing it to pivot on the pulling pin as it exits the cartridge. Measure the distance between the point where the force first exceeds 0,5 N and the point where the maximum pull-out force is observed. The force shall be measured with a pin that fits into diameters  $d_7$  and  $d_8$  (see figure 13).

The insertion force, i.e. the force required to push the leader block into latched position in the cartridge shall not be greater than 12 N when measured at an angle

$$\mu_5 = 48^\circ \pm 3^\circ.$$

#### 7.17 Tape Wind

When the cartridge is viewed from the top, the tape shall be wound counter-clockwise and with the recording surface toward the hub.

#### 7.18 Wind Tension

The tape shall be wound with a tension of:

$$2,2 \text{ N} \pm 0,3 \text{ N}$$

#### 7.19 Circumference of the Tape Reel

The tape shall be wound to a circumference of between 280 mm and 307 mm.

#### 7.20 Moment of Inertia

The moment of inertia of the tape reel is the ratio of the torque applied to it (complete with tape, hub and flanges) when it is free to rotate about a given axis to the angular acceleration thus produced about that axis.

The moment of inertia of the reel and tape shall be:

- Between  $145 \times 10^{-6} \text{ kg.m}^2$  and  $180 \times 10^{-6} \text{ kg.m}^2$  when the circumference is not less than 280 mm and less than 289 mm.
- Between  $160 \times 10^{-6} \text{ kg.m}^2$  and  $195 \times 10^{-6} \text{ kg.m}^2$  when the circumference is not less than 289 mm and less than 298 mm.
- Between  $180 \times 10^{-6} \text{ kg.m}^2$  and  $216 \times 10^{-6} \text{ kg.m}^2$  when the circumference is not less than 298 mm and not greater than 307 mm.
- The moment of inertia of the empty reel shall be:  
 $33,00 \times 10^{-6} \text{ kg.m}^2 \pm 3,63 \times 10^{-6} \text{ kg.m}^2.$

#### Procedure

Torsionally oscillate the reel on an inertial dynamics unit. The oscillation period shall be measured electronically with a universal counter. The oscillation time shall then be converted to its rotational inertial value.



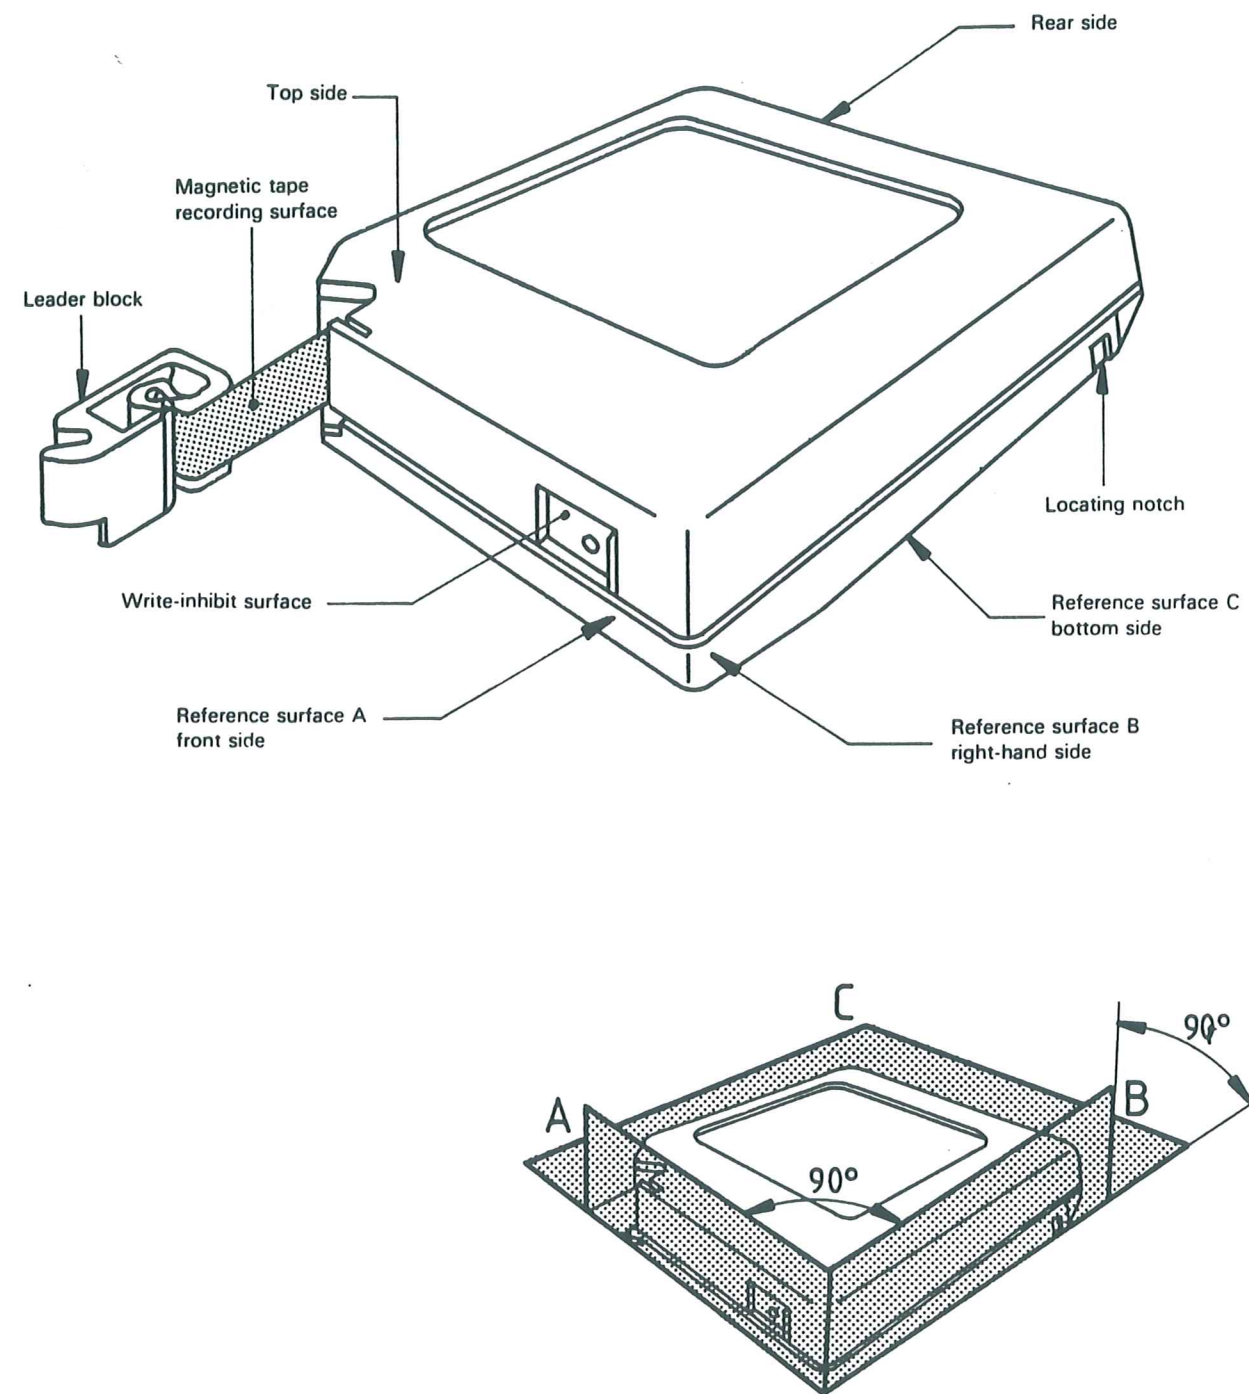


Figure 1 - General view of cartridge

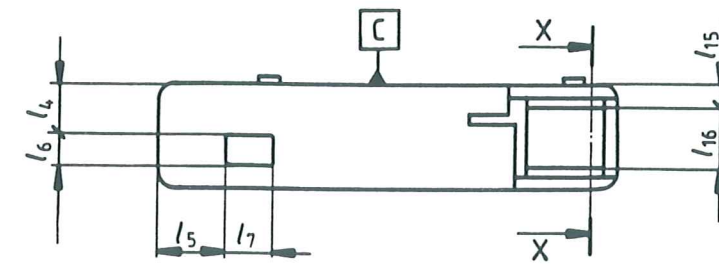


Figure 2 - Front side of case

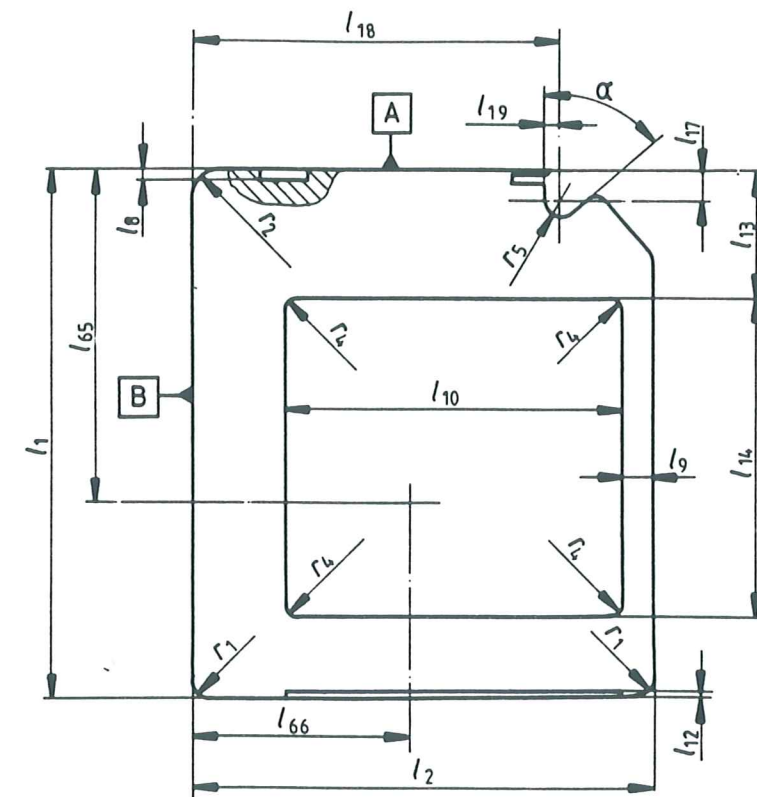


Figure 3 - Top side of case

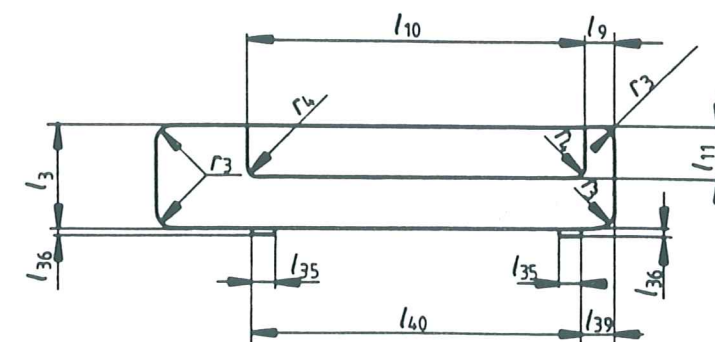


Figure 4 - Rear side of case

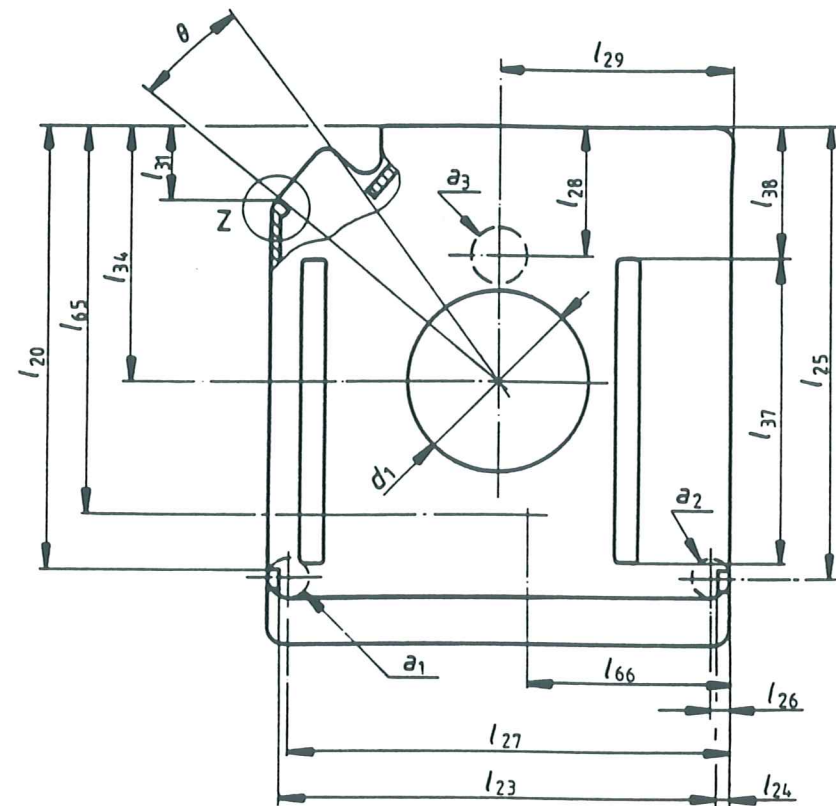


Figure 5 - Bottom side of case

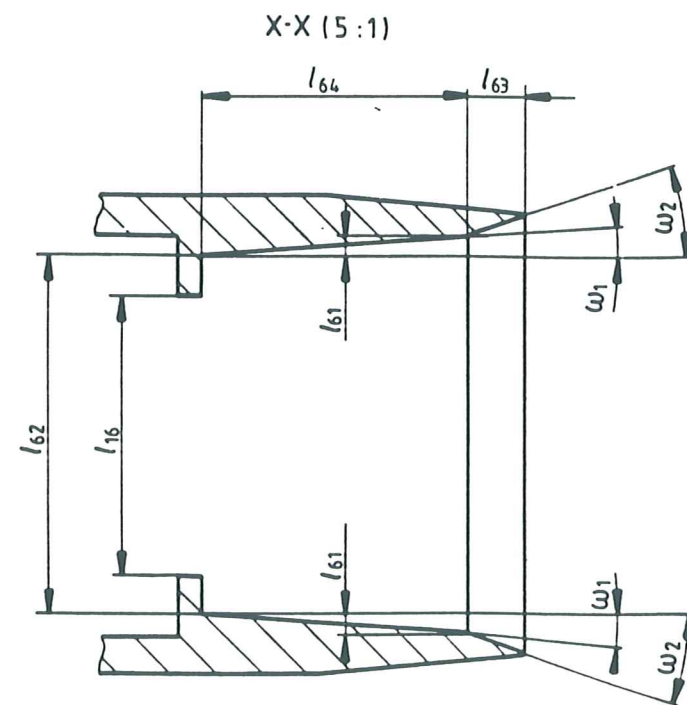


Figure 7 - Enlarged view

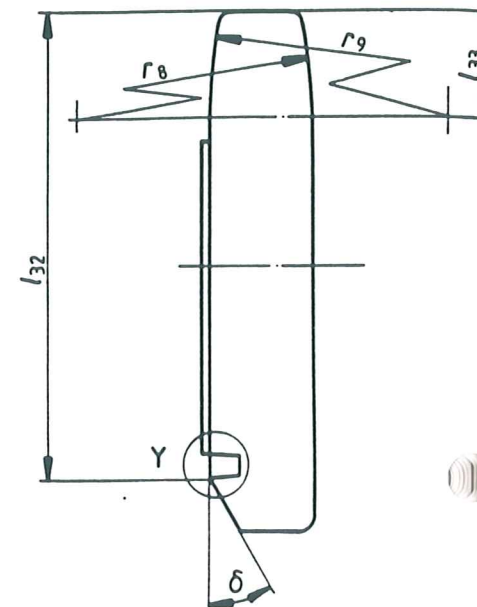


Figure 6 - Side of case

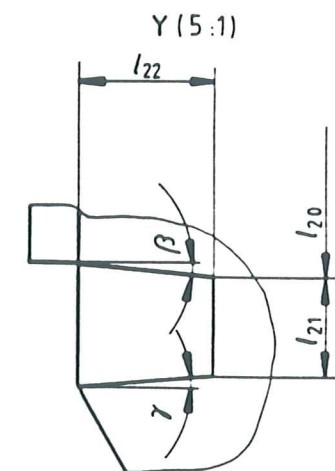


Figure 8 - Cross-section of a location notch

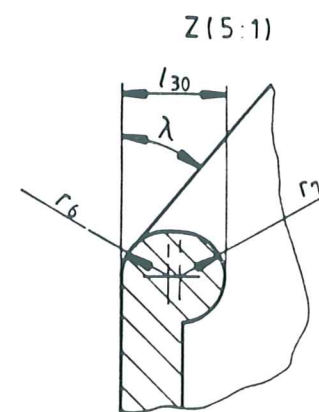


Figure 9 - Cross-section of a detail of the opening of case

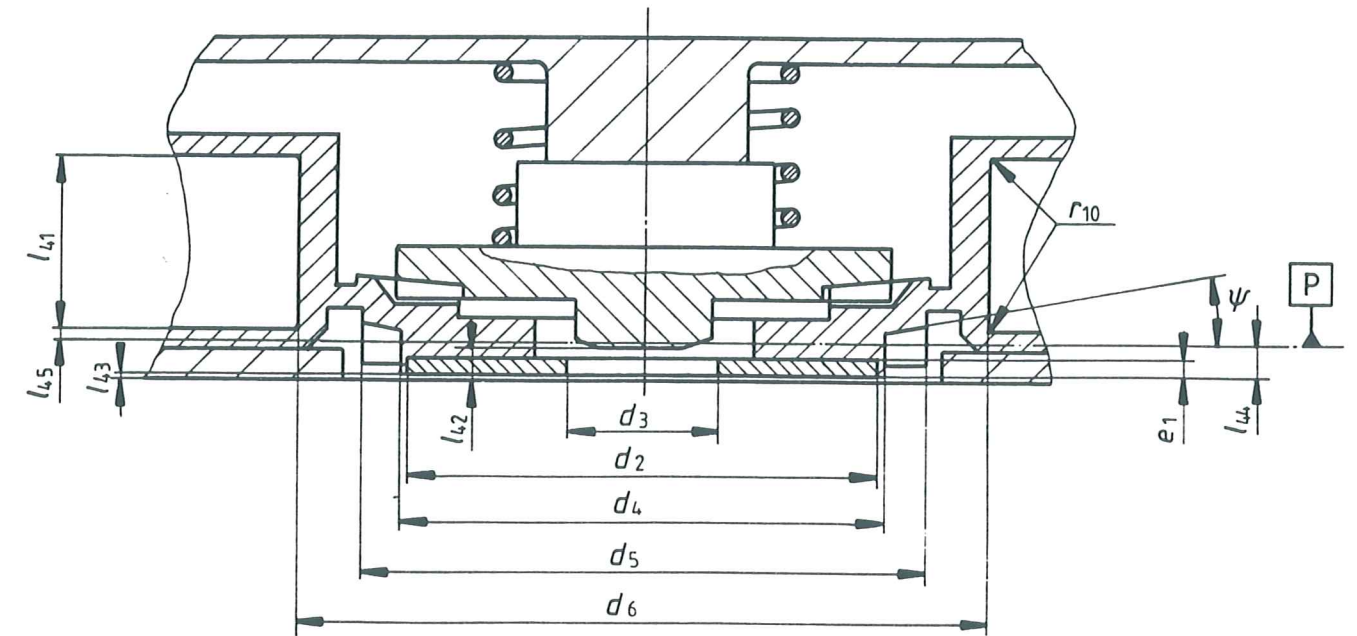


Figure 10 - Cross-section of the cartridge in hand

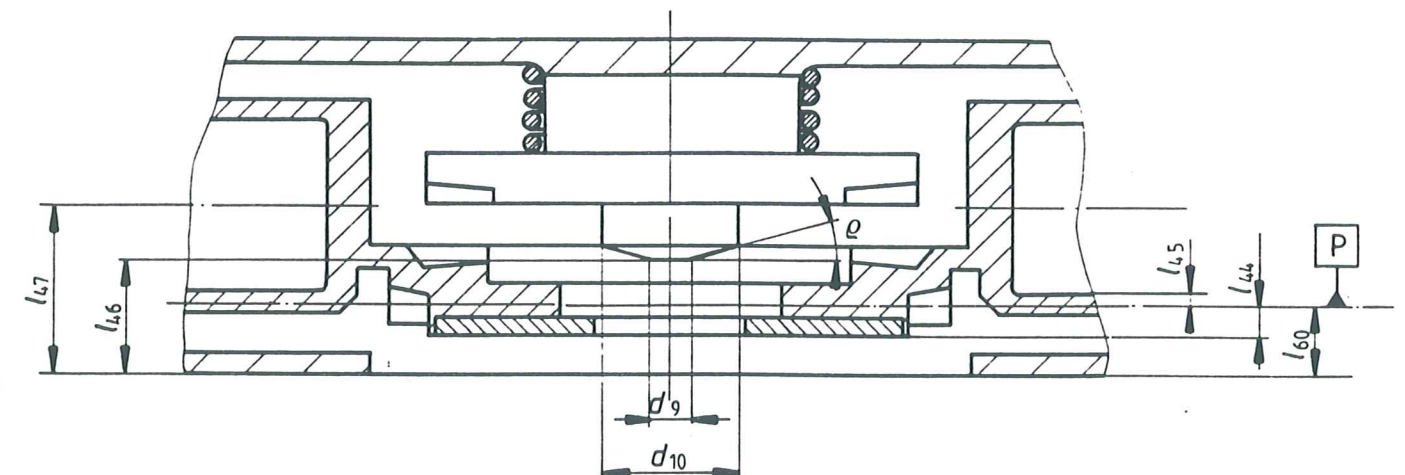


Figure 11 - Cross-section of the cartridge in the drive

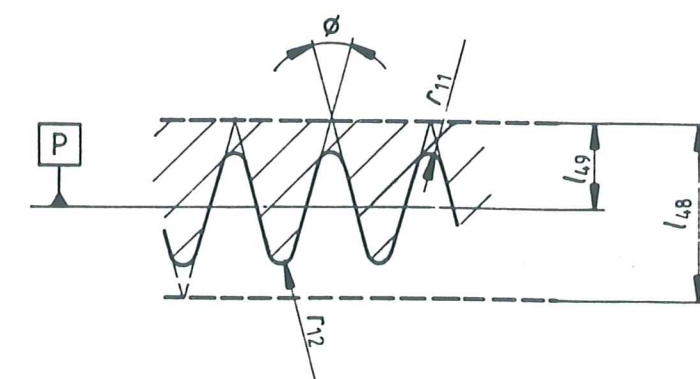


Figure 12 - Teeth of the toothed rim



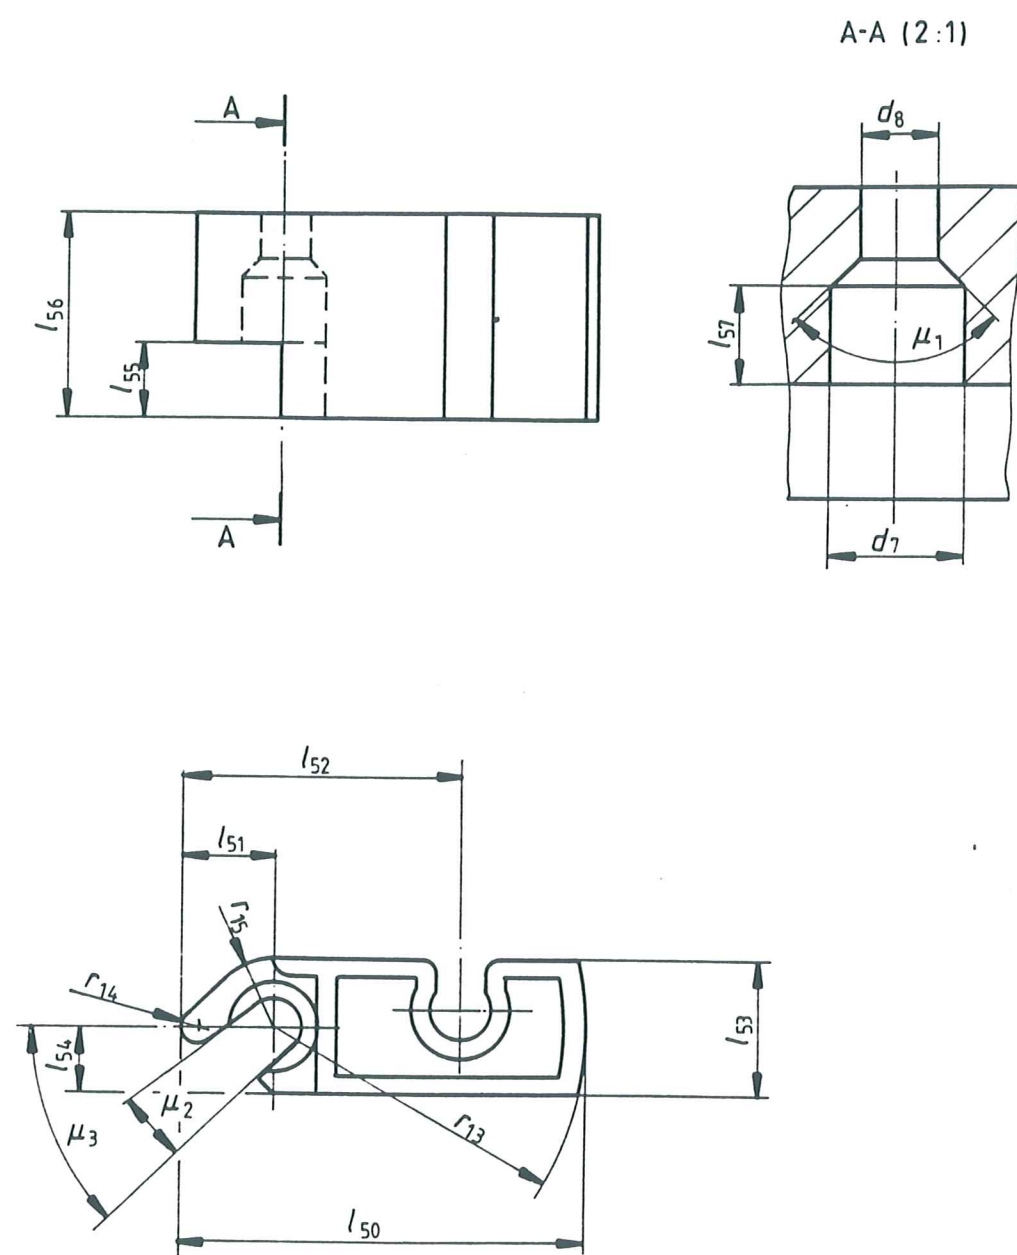


Figure 13 - Cross-section of leader block

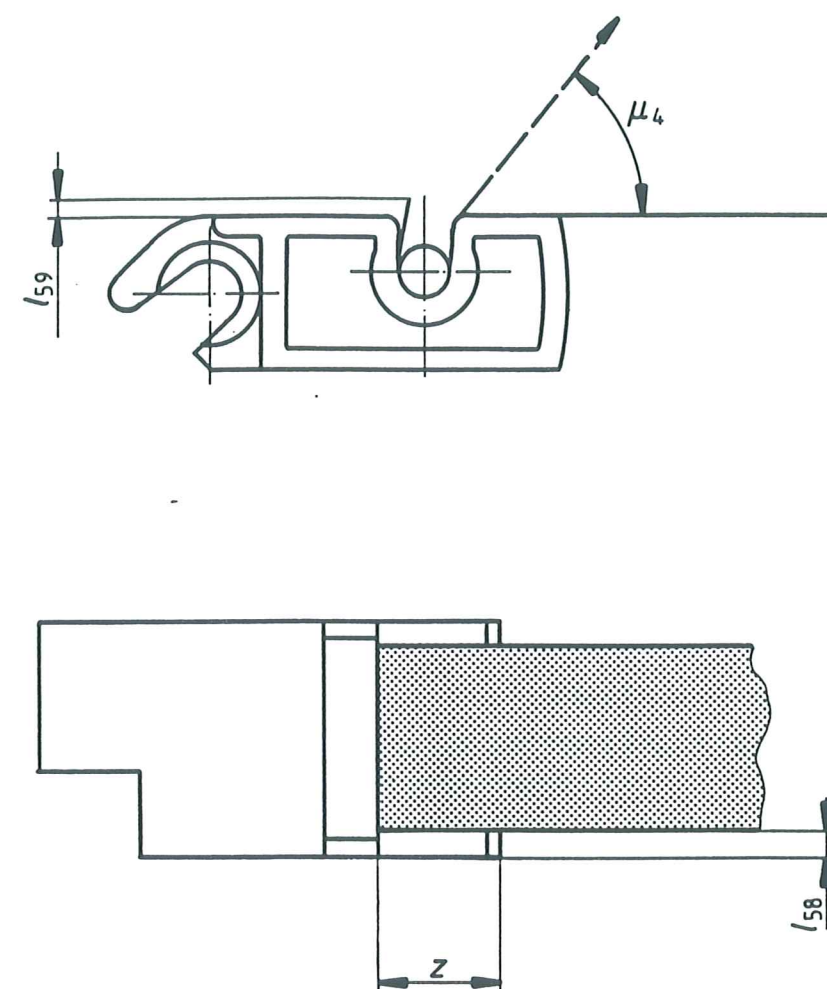


Figure 14 - Fixation of tape to leader block

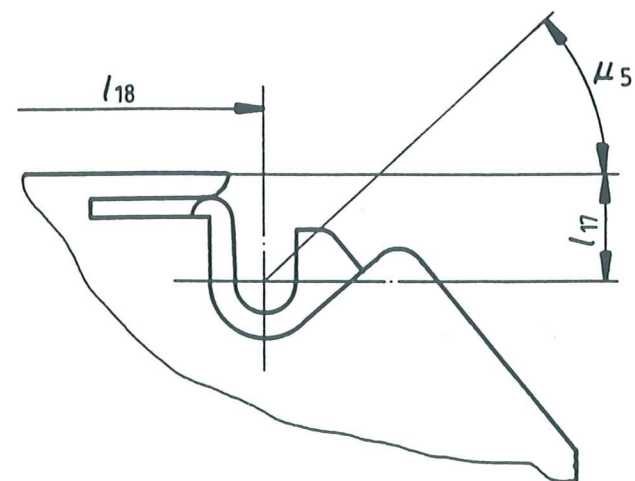


Figure 15 - Leader block in case

## SECTION IV - RECORDING METHOD AND FORMATS

### 8 METHOD OF RECORDING

The method of recording shall be :

- a ZERO is represented by a flux transition at the beginning of a bit cell followed by a flux transition at the centre of the bit cell,
- a ONE is represented by a flux transition at the beginning of a bit cell.

#### 8.1 Physical Recording Density

The physical recording density shall be:

- for all ZEROS: 1 944 ftpmm
- for all ONES : 972 ftpmm

#### 8.2 Bit Cell Length

The resulting nominal bit cell length is 1,029 µm.

#### 8.3 Average Bit Cell Length

The average bit cell length shall be the sum of n bit cell lengths divided by n.

#### 8.4 Long-Term Average Bit Cell Length


The long-term average bit cell length shall be the average bit cell length taken over a minimum of 972 000 bit cells. The long-term average bit cell length shall be within  $\pm 4\%$  of the nominal bit cell length.

#### 8.5 Short-Term Average Bit Cell Length (STA)

The short-term average bit cell length shall be the average taken over 16 bit cells. The short-term average bit cell length shall be within  $\pm 7\%$  of the nominal bit cell length.

#### 8.6 Rate of Change

The rate of change of the STA shall not exceed 1,6 %.

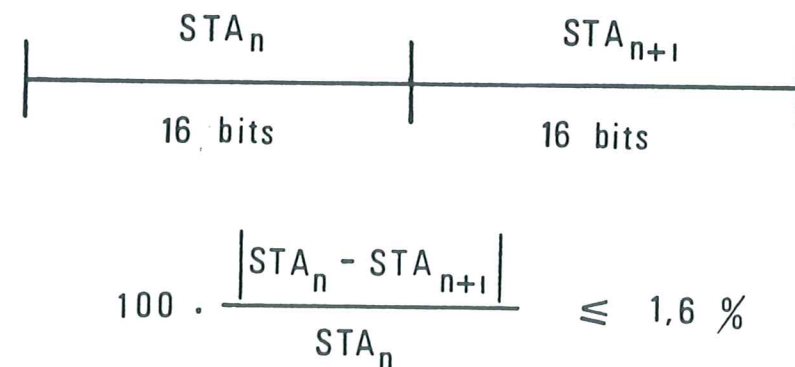

#### 8.7 Bit Shift

The maximum displacement of any ONES zero crossing, exclusive of missing pulses, shall not deviate by more than 28 % from the expected nominal position as defined by the average bit cell length. See Appendix G for the test procedure.

#### 8.8 Total Character Skew

No bit belonging to the same written transverse column shall be displaced by more than 19 bit cell lengths when measured in a direction parallel to the Reference Edge (see 9.2) of the tape.

#### 8.9 Read Signal Amplitude

The average signal amplitude of an interchanged cartridge averaged over 4000 flux transitions at 972 ftpmm shall be between 60 % and 150 % of the Standard Reference Amplitude. Averaging for the interchanged cartridge may be segmented into blocks.

Traceability to the Standard Reference Amplitude is provided by the calibration factors supplied with each Secondary Standard Reference Tape.

#### 8.10 Coincident Missing Pulse Zones

No block shall be recorded over a coincident missing pulse zone. Such zone shall be erased as specified in 12.4.

### 9. TRACK FORMAT

#### 9.1 Number of Tracks

There shall be 18 tracks.

#### 9.2 Reference Edge

The Reference Edge of the tape is its bottom edge when viewing the recording surface of the tape with the hub end of the tape to the observer's right (see 12.8.2).

#### 9.3 Track Positions

The distance from the centrelines of the tracks to the Reference Edge shall be:

Track 1	: 11,68 mm
Track 2	: 11,05 mm
Track 3	: 10,42 mm
Track 4	: 9,79 mm
Track 5	: 9,16 mm
Track 6	: 8,53 mm
Track 7	: 7,90 mm
Track 8	: 7,27 mm
Track 9	: 6,64 mm
Track 10	: 6,01 mm
Track 11	: 5,38 mm
Track 12	: 4,75 mm
Track 13	: 4,12 mm
Track 14	: 3,49 mm
Track 15	: 2,86 mm
Track 16	: 2,23 mm
Track 17	: 1,60 mm
Track 18	: 0,97 mm

The tolerance shall be  $\pm 0,04$  mm for all tracks.

#### 9.4 Track Width

The width of a written track shall be  $0,540 \text{ mm} \pm 0,017 \text{ mm}$ .



## 9.5 Azimuth

On any track the angle that a flux transition across the track makes with a line perpendicular to the Reference Edge shall not be greater than 3 minutes of arc.

### NOTE 7

*At the time of writing the tape, the azimuth should be less than 1 minute of arc. The remaining 2 minutes of arc is the allowance for tape distortion caused by environmental conditions and aging.*

## 10. PACKET FORMAT

### 10.1 Packet Elements

A Packet shall consist of:

Packet ID  
UDR  
Packet Trailer



### 10.2 Packet ID

The Packet ID shall consist of 32 bytes numbered 1 to 32. The Packet ID shall not be processed.

Bytes 1 to 6 constitute the Packet Block-ID.

Byte 1 shall be set to 10000000

Byte 2

Bit 1 shall be set to ZERO

Bits 2 to 8 shall express, in binary notation, the value of the Physical Position Indicator at that point along the tape.

See Appendix L for the method of calculation.

Bytes 3 to 6 shall express, in binary notation, the UDR identification. The count shall be set to 0 for the first data block or Tape Mark following the initial interblock gap.

It shall be increased by 1 for each UDR and each Tape Mark. It shall not be increased for TCRs (see 12.9).

Bytes 7 to 10 shall express, in binary notation, a value equal to the total number of data bytes in the Packet Data Field, minus 1.

Byte 11 shall express, in binary notation, a value equal to the number of the bytes in the packet Trailer. The sum of Bytes 7 to 10 and Byte 11 shall be equal to the total number of bytes in the Packet, minus 1.

Byte 12

Bit 1 when set to ZERO, shall indicate that this Packet is not the last Packet of the data block,

when set to ONE shall indicate that this Packet is the last Packet of the data block.

Bit 2 when set to ZERO, shall indicate that the data has not been processed, when set to ONE shall indicate that the data has been processed.

Bits 3 to 8 shall be all ZEROs.

Byte 13 when bit 2 of Byte 12 is set to ZERO, Byte 13 shall be ignored, when this bit 2 is set to ONE, Byte 13 shall contain in binary notation the identification of the Algorithm.

Bytes 14 to 30 shall be set to ZERO.

Bytes 31 and 32 shall contain CRC Byte 1 and CRC Byte 2, respectively, computed sequentially over the previous 30 bytes, as described in Appendix K.

The data from the Packet ID bytes shall be inverted before processing in the CRC generator. The bits in the CRC character shall be inverted before appending to the first 30 bytes of the Packet ID.

### 10.3 UDR

The UDR shall contain either all processed data, or all unprocessed data, as indicated by Byte 12, bit 2 of the Packet ID.

### 10.4 Packet Trailer

There are two forms of Packet Trailer; one form is used in Packets containing processed data, and the other in Packets containing unprocessed data. Packet Trailer bytes shall not be processed.

#### 10.4.1 Packet Trailer when data has been processed

The Trailer shall be 10 to 41 bytes in length.

Bytes 1 to 4 shall express, in binary notation, a count of the number of bytes from the LDR in the Packet, (i.e. before processing).

Bytes 5 and 6 shall contain CRC Byte 1 and CRC Byte 2, respectively, computed sequentially over the bytes from the LDR in the Packet, (i.e. before processing), as described in Appendix K.

Bytes 7 and 8 shall contain CRC Byte 1 and CRC Byte 2, respectively, computed sequentially over the bytes from the UDR in the Packet (i.e. after processing), and the first six bytes of the Packet Trailer, as described in Appendix K.

Pad Bytes A sufficient number of Pad Bytes, in the range 0 to 31, shall be added to the Packet Trailer such that the entire Packet consists of an integral multiple of 32 bytes.



#### Packet Trailer CRC Bytes

The penultimate and ultimate bytes of the Packet Trailer shall contain CRC Byte 1 and CRC Byte 2, respectively, computed sequentially over the bytes from the UDR (i.e. after processing), and the preceding bytes in the Packet Trailer, as described in Appendix K.

The input shall be inverted before processing in the CRC generator. The bits in the CRC character shall be inverted before appending to the rest of the bytes of the Packet Trailer.

#### 10.4.2 Packet Trailer when data has not been processed

The Trailer shall be 2 to 33 bytes in length.

Pad Bytes There shall be 0 to 31 Pad bytes such that the entire Packet consists of an integral multiple of 32 bytes.

#### Packet Trailer CRC bytes


The penultimate and ultimate bytes of the Packet Trailer shall contain CRC Byte 1 and CRC Byte 2, respectively, computed sequentially over the bytes from the LDR in the Packet, and the preceding Pad bytes in the Packet Trailer, as described in Appendix K.

The input shall be inverted before processing in the CRC generator. The bits in the CRC character shall be inverted before appending to the rest of the bytes of the Packet Trailer.

### 11. DATA BLOCK FORMAT

#### 11.1 Logical Content

The logical content of a Data Block shall consist of one or more Packets, sequentially appended, followed by Control Bytes.




The total number of bytes, after processing, in the Packets shall not exceed 102 400 bytes. The process of appending Packets shall be terminated if a Tape Mark (see 12.5) is to be written or if no more packets are available. It may also be terminated for any other appropriate reason.

If a single Packet exceeds 102 400 bytes the data shall be written in the format defined in Standard ECMA-120.

#### 11.1.1 Control Bytes

Control bytes comprise Count Field Bytes and Block-ID Bytes.

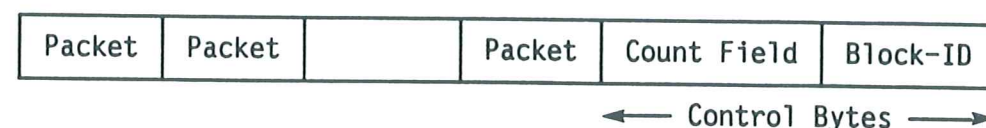

#### 11.1.1.1 Count Field Bytes

The Count Field shall comprise 6 bytes. These bytes shall follow the last Data Byte.

Bytes 1 and 2 shall contain, in binary notation, a value equal to the number of Packets contained in the Data Block.

Bytes 3 to 6 shall contain, in binary notation, a value calculated before processing as follows: for each LDR a sub-total shall be computed by dividing the number of bytes by 32 and adding 1 if there is a remainder. The sum of these sub-totals shall be the value recorded in these bytes.

#### 11.1.1.2 Block-ID Bytes

The Block-ID shall comprise 4 bytes. These bytes shall follow the Count Field bytes. The bits shall be numbered from 1 (most significant) to 32 (least significant).

Bit 1 shall be set to ZERO.

Bits 2 to 8 shall express, in binary notation, the value of the Physical Position Indicator at that point along the tape. See Appendix L for the method of calculation.

Bit 9 shall be set to ONE.

Bit 10 shall be set to ZERO.

Bits 11 to 32 shall express, in binary notation, the same count that is contained in a Packet Block-ID for the first Packet in the data block (see 10.2, Bytes 3 to 6).

These 32 bits shall be assigned to the following positions:


Byte sequence	1	2	3	4
Bits	1 to 8	9 to 16	17 to 24	25 to 32
Bit position	8 to 1	8 to 1	8 to 1	8 to 1

#### 11.2 Allocation of the Bytes of the Data Block to Frames

The bytes of the Data Block shall be arranged in groups, called Frames, completed with check characters. These Frames shall, in turn, be arranged in a given sequence together with additional groups of bytes having prescribed bit patterns. The so-arranged data bytes and additional bytes shall then be recorded on the tape according to a specific coding scheme (see 11.4).

A Frame shall be a section across all 18 tracks which contains logically related 8-bit bytes, one byte per track. Each byte in a Frame is recorded along a track.



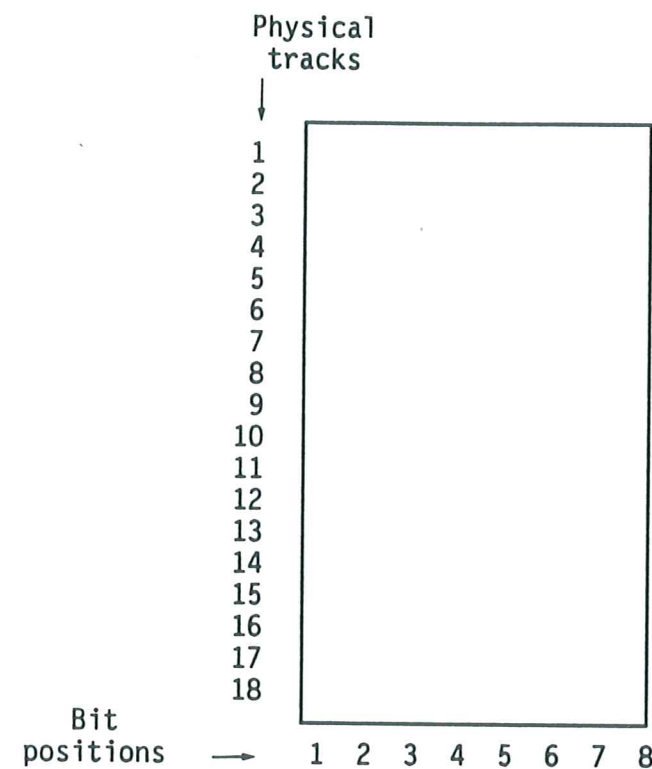

There are four types of Frame:

- Prefix Frames
- Data Frames
- Residual Frames
- Suffix Frames

The following types of byte are used in Frames:

- Packet Bytes
- Control bytes { Count field bytes, Block-ID bytes
- Pad bytes
- Residual bytes
- Diagonal Redundancy Check bytes
- Vertical Redundancy Check bytes
- CRC bytes

A Data Block shall have the following structure:

- Prefix the first two frames
- Data Frames up to 7314 frames grouped in clusters
- Residual Frames Residual Frame 1 and Residual Frame 2, or Residual Frame 2 only
- Suffix the last two frames

Prefix	1st Data Cluster	2nd Data Cluster		last Data Cluster	Res. 1	Res. 2	Suffix
2 frames	69 frames	71 frames		up to 71 frames	1 frame	1 frame	2 frames


#### 11.2.1 Prefix Frames

The prefix shall consist of two frames containing Pad bytes in each track.

#### 11.2.2 Data Frames

Each Data Frame shall consist of:

- the first 7 Packet bytes recorded in odd tracks 1 to 13,
- the next 7 Packet bytes recorded in even tracks 2 to 14,
- a Diagonal Redundancy Check Byte (DRC-A) recorded in track 15 (see 11.3.1 and 11.3.3),
- a Vertical Redundancy Check Byte (VRC-A) recorded in track 17 (see 11.3.2 and 11.3.3),
- a Diagonal Redundancy Check Byte (DRC-B) recorded in track 16 (see 11.3.1 and 11.3.3),
- a Vertical Redundancy Check Byte (VRC-B) recorded in track 18 (see 11.3.2 and 11.3.3).

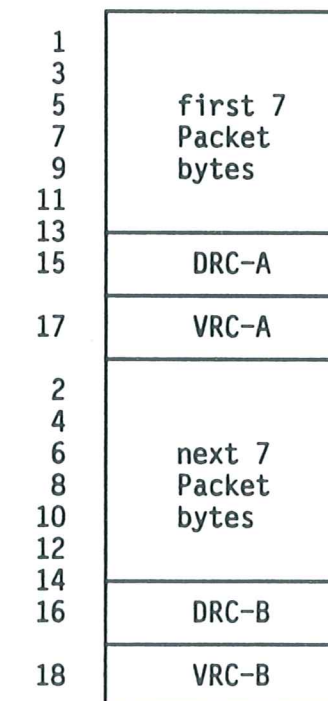

The Data Frames are grouped in clusters as follows:

- the first cluster shall contain up to 69 frames of Packet bytes,
- the next clusters, if provided, shall contain 71 frames of Packet bytes,
- the last cluster shall contain up to 71 frames of Packet bytes.

### 11.2.3 Residual Frames

Packet bytes remaining after the last Data Frame of the last Data Cluster shall be recorded in Residual Frame 2, or in Residual Frames 1 and 2, as described below.

#### 11.2.3.1 Zero or 1 remaining data bytes

There shall be a Residual Frame 2 only. The Packet byte followed by 10 Control Bytes, and followed by one or zero Pad bytes to make a total of 11 bytes, shall be recorded in odd tracks 1 to 13 and even tracks 2 to 8.

Track 10 shall be recorded with the Residual Byte (see 11.2.3.4).

Tracks 12 and 14 shall be recorded with CRC Byte 1 and CRC Byte 2, respectively (see 11.2.3.5).

Tracks 15 and 17 with the DRC-A and the VRC-A, respectively.

Tracks 16 and 18 with the DRC-B and the VRC-B, respectively.

1	0 or 1 Packet byte  and 7 or 6 Control bytes
3	
5	
7	
9	
11	DRC-A
13	
15	
17	
2	3 or 4 Control bytes and 1 or 0 Pad bytes
4	
6	
8	
10	Residual Byte
12	CRC Byte 1
14	CRC Byte 2
16	DRC-B
18	VRC-B

#### 11.2.3.2 2, 3 or 4 remaining bytes

There shall be a Residual Frame 1 followed by a Residual Frame 2.

##### Residual Frame 1

The 2, 3 or 4 Packet bytes, followed by 10 Control Bytes, and followed by 2, 1 or 0 Pad bytes, respectively, shall be recorded in odd tracks 1 to 13 and even tracks 2 to 14.

- Track 15 shall be recorded with the DRC-A
- Track 17 with the VRC-A

- Track 16 with the DRC-B
- Track 18 with the VRC-B

##### Residual Frame 2

Odd tracks 1 to 13 and even tracks 2 to 8 shall be recorded with Pad bytes.

Tracks 10, 12, 14, 15, 16, 17 and 18 shall be recorded as in 11.2.3.1.

Residual Frame 1		Residual Frame 2	
1	2, 3 or 4 Packet bytes  and 5, 4 or 3 Control bytes	1	7 Pad bytes
3		3	
5		5	
7		7	
9		9	
11	DRC-A	11	DRC-A
13		13	
15		15	
17		17	
2	5, 6 or 7 Control bytes  and 2, 1 or 0 Pad bytes	2	4 Pad bytes
4		4	
6		6	
8		8	
10	Residual Byte	10	Residual Byte
12		12	
14		14	
16		16	
12	CRC Byte 1	12	CRC Byte 1
14		14	
16		16	
18		18	
16	DRC-B	16	DRC-B
18		18	
16	VRC-B	16	VRC-B
18		18	

#### 11.2.3.3 5 to 13 remaining bytes

There shall be a Residual Frame 1 followed by a Residual Frame 2.

##### Residual Frame 1

The 5 to 13 Packet bytes, followed by sufficient Control bytes to make a total of 14 bytes, shall be recorded in odd tracks 1 to 13 and even tracks 2 to 14.

Tracks 15, 16, 17 and 18 shall be recorded as in 11.2.3.2.

##### Residual Frame 2

The 1 - 9 remaining Control bytes, followed by a sufficient number of Pad bytes to make a total of 11 bytes, shall be recorded in odd tracks 1 to 13 and even tracks 2 to 8.

Tracks 10, 12, 14, 15, 16, 17 and 18 shall be recorded as in 11.2.3.1.



Residual Frame 1		Residual Frame 2	
1	5, 6 or 7 Packet bytes and 2, 1 or 0 Control bytes	1	1 to 7 Control bytes and 6 to 0 Pad bytes
3		3	
5		5	
7		7	
9		9	
11	DRC-A	11	DRC-A
13		13	
15		15	
17	VRC-A	17	VRC-A
19		19	
21		21	
2	Up to 6 Control bytes and 7 to 1 Pad bytes	2	0, 1 or 2 Control bytes and 4, 3 or 2 Pad bytes
4		4	
6		6	
8		8	
10		10	
12	CRC Byte 1	12	CRC Byte 1
14		14	
16		16	
18	DRC-B	18	DRC-B
20		20	
22		22	
24	VRC-B	24	VRC-B
26		26	
28		28	

#### 11.2.3.4 Residual Byte

The Residual Byte shall be recorded in track 10 of the Residual Frame 2. Its bits are numbered from 1 (most significant) to 8 (least significant).

Bits 1 and 2 shall be unspecified, they can be a ONE or a ZERO.

Bits 3 and 4 shall be ONES.

Bits 5 to 8 shall express in binary notation the total number of Pad bytes in the Residual Frame(s).

The allocation of bits to the bit positions in the Residual Byte shall be:

Bit 1 to 8

Bit position 8 to 1

#### 11.2.3.5 Cyclic Redundancy Check Character (CRC)

Tracks 12 and 14 of the Residual Frame 2 shall contain CRC Byte 1 and CRC Byte 2, respectively, computed sequentially over the Packet bytes, the Control bytes, the Pad bytes and the Residual Byte, as described in Appendix K.

This does not include the ECC Bytes (see 11.3).

#### 11.2.4 Suffix Frames

The Suffix shall consist of two frames containing:

- in odd tracks 1 to 13 : Pad bytes
- in track 15 : DRC-A
- in track 17 : VRC-A
- in even tracks 2 to 14 : Pad bytes
- in track 16 : DRC-B
- in track 18 : VRC-B

### 11.3 Error Correcting Code (ECC)

The error correcting code yields check bits:

- the Diagonal Redundancy Check (DRC)
- the Vertical Redundancy Check (VRC).

Computation of the DRCs and VRCs starts with the Prefix and ends with the Suffix.

In 11.3.1 and 11.3.2 the following notation is used:

$T_{nm}$  = the m-th bit of the n-th track

#### 11.3.1 Diagonal Redundancy Check (DRC)

The two DRCs shall be recorded in tracks 15 and 16, respectively. The bits in each of these tracks shall be computed from the bits in all other tracks, except tracks 17 and 18. The m-th bit in each of these tracks is specified by:

$$m\text{-th bit of track 15} = \left\{ \sum_{n=0}^6 T(2n+1)_{m-n-1} + \sum_{n=1}^8 T(2n)_{m-n-7} \right\} \quad (\text{modulo } 2)$$

$$m\text{-th bit of track 16} = \left\{ \sum_{\substack{n=0 \\ i=7}}^{\substack{i=1 \\ n=6}} T(2n+1)_{m+n+14} + T(15)_{m-15} + \sum_{n=1}^7 T(2n)_{m+n-8} \right\} \quad (\text{modulo } 2)$$

#### 11.3.2 Vertical Redundancy Check (VRC)

The two VRCs shall be recorded in tracks 17 and 18, respectively. The bits in each of these tracks shall be computed from the bits of the eight other tracks having the same index parity. The m-th bit in each of these tracks is specified by:


$$m\text{-th bit of track 17} = \left\{ \sum_{n=0}^7 T(2n+1)_m \right\} \quad (\text{modulo } 2)$$

$$m\text{-th bit of track 18} = \left\{ \sum_{n=1}^8 T(2n)_m \right\} \quad (\text{modulo } 2)$$

### 11.3.3 ECC Format

In each frame the eight bits of each DRC and each VRC shall be considered as 8-bit Check Bytes.

### 11.3.4 Summary of ECC

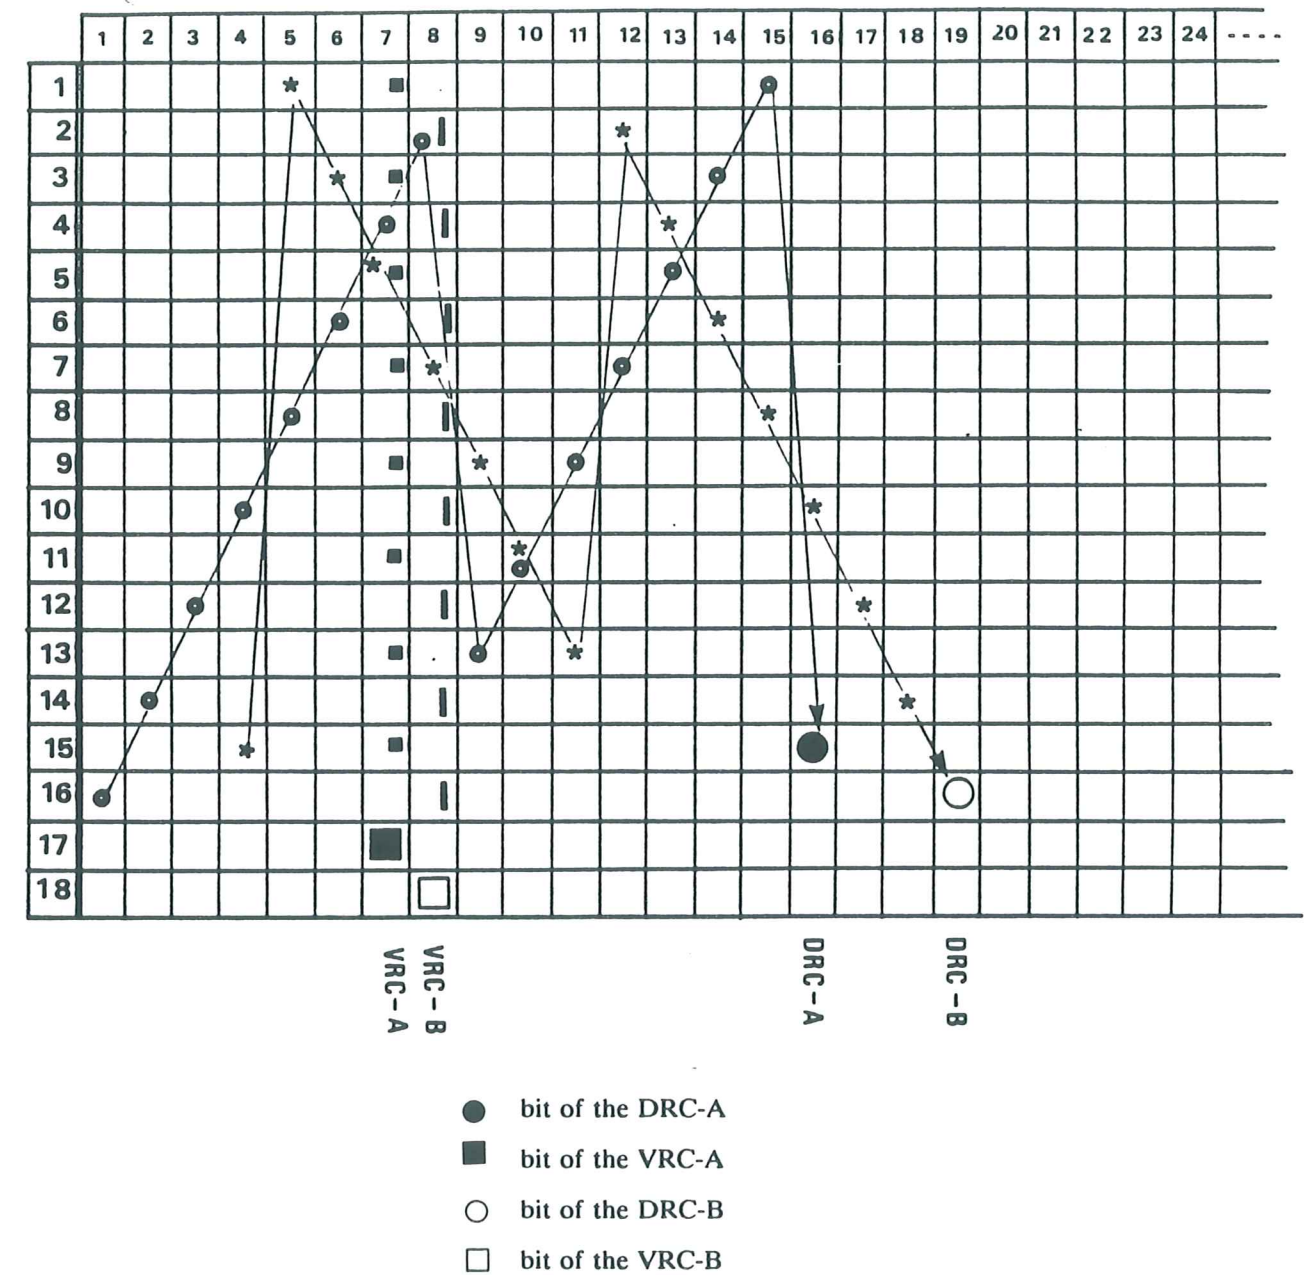

### Bibliography

For a complete description of this ECC schema, see A.M. PATEL: Adaptive cross parity (AXP) code for a high-density magnetic tape subsystem, in IBM Journal of Research and Development, Vol. 29, Number 6 of November 1985.




#### 11.4 Recording of 8-bit bytes on the tape

Each 8-bit byte in the Prefix, in the Data Frames, in the Residual Frame(s) and in the Suffix shall be represented by a 9-bit pattern on the tape.

Appendix F specifies the 9-bit pattern representing each 8-bit byte. The bit of the 9-bit pattern in the lowest bit position shall be recorded first.

#### 11.5 Recorded Data Block

When recorded on the tape each Data Block shall have the following structure and be called a Recorded Data Block.

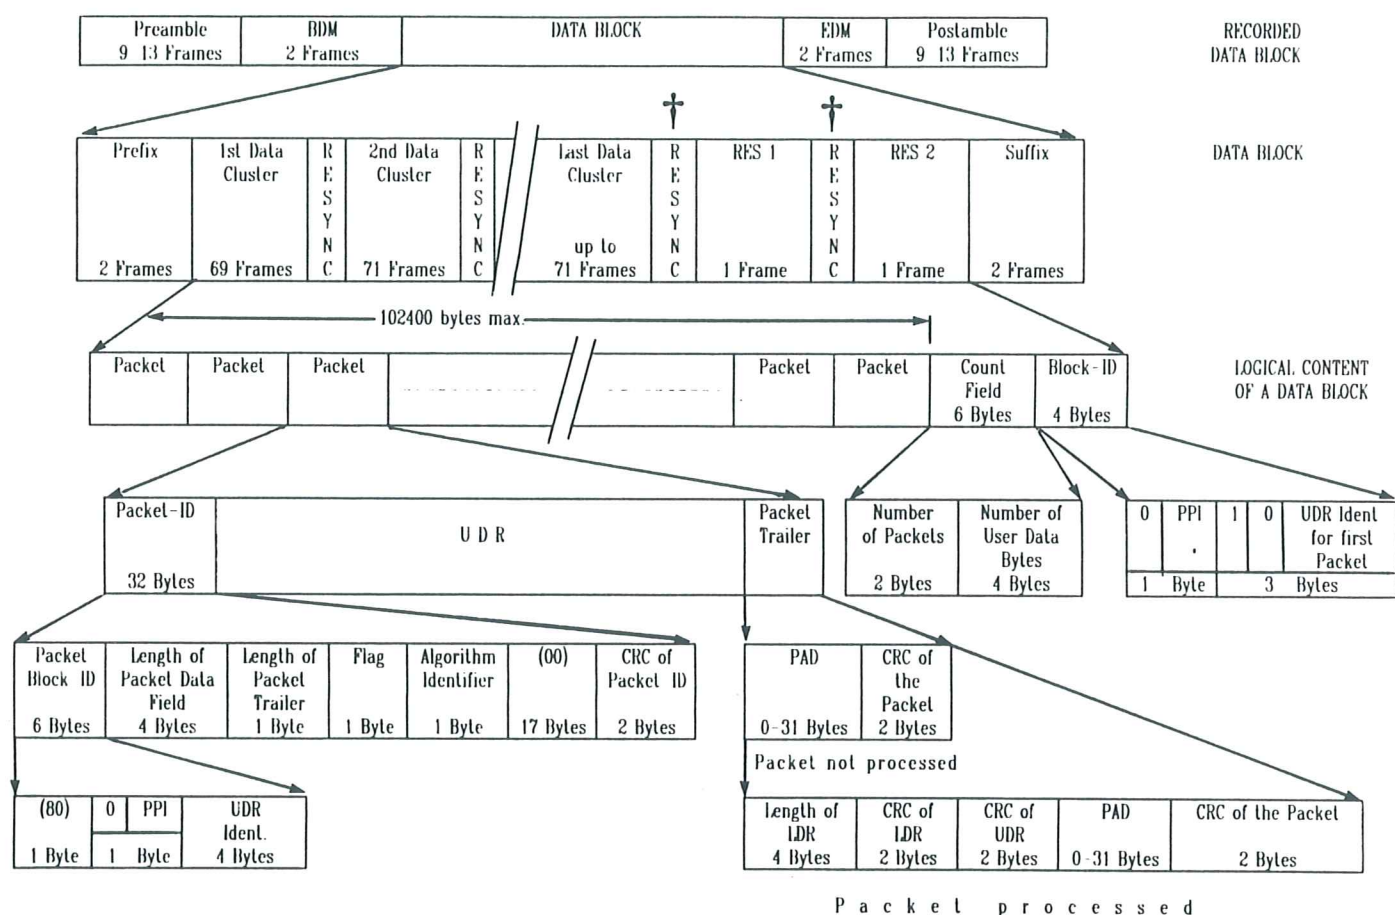

† The presence of this Resync Control Block depends on the number of preceding frames (see 11.5.3).

##### 11.5.1 Preamble

The Preamble shall consist of between 9 and 13 frames recorded with the 9-bit pattern 111111111 in all tracks.

##### 11.5.2 Beginning of Data Mark (BDM)

The BDM shall consist of two frames recorded with the 9-bit pattern 100010001 in all tracks.

##### 11.5.3 Resync Control Frame

A Resync Control Frame shall have the 9-bit pattern 100010001 in all tracks. A Resync Control Frame shall be recorded after each 71 frames starting with the Prefix frames. If the Resync Control Frame would immediately precede the EDM, it shall not be recorded.

#### 11.5.4 End of Data Mark (EDM)

The EDM shall consist of two frames recorded with the 9-bit pattern 100010001 in all tracks.

#### 11.5.5 Postamble

The Postamble shall consist of between 9 and 13 frames recorded with the 9-bit pattern 111111111 in all tracks.

#### 11.6 Data Density

Due to the ECC bytes, the 8-bit to 9-bit conversion and to the Resync Control Frames the maximum density of data bytes is:

$$14 \times 972 \times \frac{1}{8} \times \frac{8}{9} \times \frac{71}{72} = 1491 \text{ data bytes per mm}$$

where:

- 14 : the number of data bytes per frame,
- 972 : the number of flux transitions per mm for the all ONEs density,
- 1/8 : the inverse value of the number of bits per byte,
- 8/9 : corresponds to the recording scheme of 11.4,
- 71/72 : corresponds to the Resync Control Frames.

## 12. TAPE FORMAT

The format of the tape is defined by the following control blocks separating and/or qualifying the Recorded Data Blocks.

- the Density Identification Burst,
- the ID Separator Burst,
- Interblock Gaps,
- Erase Gaps,
- Tape Marks.

In addition there are two Transform Change Records (see 12.9).

The five control blocks have the following recording characteristics.

i) The 18 tracks are divided into six zones:

- zone A : Tracks 1, 7, 13
- zone B : Tracks 2, 8, 14
- zone C : Tracks 3, 9, 15
- zone D : Tracks 4, 10, 16
- zone E : Tracks 5, 11, 17
- zone F : Tracks 6, 12, 18

	A	B	C	D	E	F
1						
2						
3						
4						
5						
6						
7						
8						
9						
10						
11						
12						
13						
14						
15						
16						
17						
18						

- ii) The tracks of each zone are recorded either with the all ONEs pattern or with the repeated 6-bit pattern 100000 called tone.

#### 12.1 Density Identification Burst

The Density Identification Burst shall be characterized by:

- all ONEs in zones A, C, F
- tone in zones B, D, E

Its length shall be:

Nominal : 2375 mm  
Minimum : 2250 mm  
Maximum : 3060 mm

The Density Identification Burst shall be the first recording on the tape.

#### 12.2 ID Separator Burst

The ID Separator Burst shall be characterized by:

- all ONEs in all zones.

Its length shall be:

Nominal : 2,0 mm  
Minimum : 1,9 mm  
Maximum : 2,1 mm

#### 12.3 Interblock Gaps

The Interblock Gaps shall be characterized by:

- all ONEs in zones A, D, F

- tone in zones B, C, E.

The length of each Interblock Gap shall be:

Nominal : 2,0 mm  
Minimum : 1,6 mm  
Maximum : 3,0 mm

Any discontinuity across all tracks in an Interblock Gap (e.g. due to start/stop mode) shall not be greater than 0,03 mm. Such discontinuity shall not occur less than 0,5 mm before the Preamble of a Recorded Data Block or within 0,5 mm after the Postamble of such a block.

An Interblock Gap shall be recorded immediately after the ID Separator Burst. An Interblock Gap shall be recorded before and after each Recorded Data Block, each Erase Gap (see 12.4) and each Tape Mark (see 12.5), except after the last Tape Mark on the tape (see 12.7).

#### 12.4 Erase Gaps

Erase Gaps shall be characterized by:

- all ONEs in zones B, C, F
- tone in zones A, D, E.

Erase Gaps shall be recorded over a length of tape where an unsuccessful write operation occurred or upon an erase instruction.

##### 12.4.1 Normal Erase Gaps

The length of a Normal Erase Gap shall be:

Nominal : 7,8 mm  
Minimum : 7,4 mm  
Maximum : 8,2 mm

Up to 20 successive Normal Erase Gaps, separated by Interblock Gaps, are permitted to be written to cover a defect area.

##### 12.4.2 Elongated Erase Gaps

The length of an Elongated Erase Gap shall be:

Maximum : 200 mm

An Elongated Erase Gap shall be recorded when a Normal Erase Gap and/or the following Interblock Gap are not recognized as such. Within an Elongated Erase Gap partial Interblock Gaps of not more than 1 mm are permitted to appear.

#### 12.5 Tape Marks

Tape Marks shall be characterized by:

- all ONEs in zones B, D, E
- tone in zones A, C, F.

The length of each Tape Mark shall be:

Nominal : 1,0 mm  
Minimum : 0,7 mm  
Maximum : 1,3 mm

One or more Tape Marks may be used to delimit sequences of Recorded Data Blocks.



## 12.6 Relation between Interblock Gaps, Erase Gaps and Tape Marks

Where an Interblock Gap precedes or follows an Erase Gap or a Tape Mark, in six of the nine tracks the tone pattern of one of these control blocks extends into the ONE bits pattern of the other as specified below.

### 12.6.1 Interblock Gap followed by a Tape Mark

On tracks 1, 6, 7, 12, 13 and 18:

- the ONE bits pattern of the Interblock Gap ends with 18 tone bits.

On tracks 2, 5, 8, 11, 14 and 17:

- the ONE bit pattern of the Tape Mark is preceded by 18 tone bits.

### 12.6.2 Tape Mark followed by an Interblock Gap

On tracks 1, 6, 7, 12, 13 and 18:

- the ONE bits pattern of the Interblock Gap is preceded by 18 tone bits.

Tape mark ends with 18 tone bits.

On tracks 2, 5, 8, 11, 14 and 17:

- the ONE bits pattern of the Tape Mark ends with 18 tone bits.

### 12.6.3 Interblock Gap followed by an Erase Gap

On tracks 1, 4, 7, 10, 13 and 16:

- the ONE bits pattern of the Interblock Gap ends with 18 tone bits.

On tracks 2, 3, 8, 9, 14 and 15:

- the ONE bits pattern of the Erase Gap is preceded by 18 tone bits.

### 12.6.4 Erase Gap followed by an Interblock Gap


On tracks 1, 4, 7, 10, 13 and 16:

- the ONE bits pattern of the Interblock Gap is preceded by 18 tone bits.

On tracks 2, 3, 8, 9, 14 and 15:

- the ONE bits pattern of the Erase Gap ends with 18 tone bits.

## 12.6.5 Summary of the relation between Interblock Gaps, Erase Gaps and Tape Marks

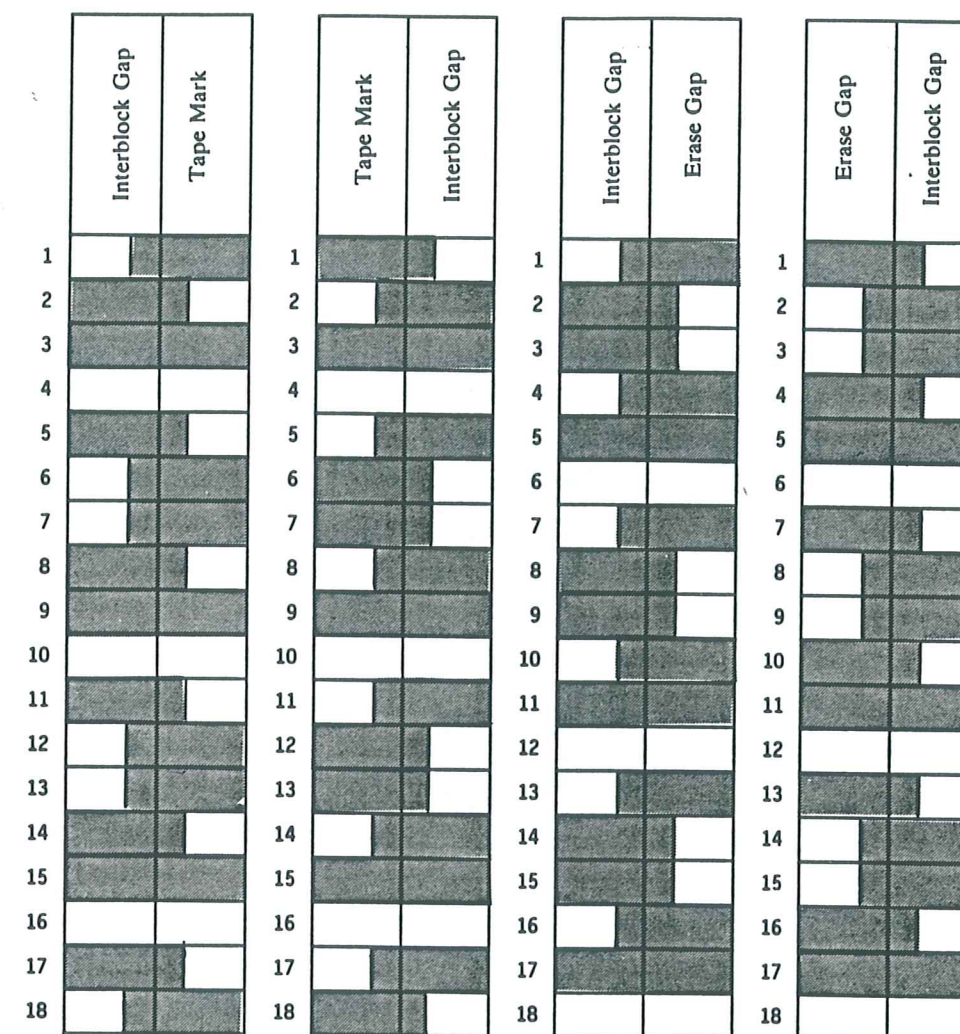

All ONEs : Tone : 18 bits of Tone :


## 12.7 First and Last Recording on the Tape

The first recording on the tape shall be a Density Identification Burst. It shall begin not more than 1,34 m from the leader block of the cartridge and end not less than 3,28 m from it.


The last recording on the tape shall be a Tape Mark optionally followed by an Interblock Gap. It shall end not less than 4,3 m from the junction of the tape to the hub of the cartridge.

## 12.8 Summary of the Tape Format

### 12.8.1 Characteristics of Recording other than Recorded Data Blocks

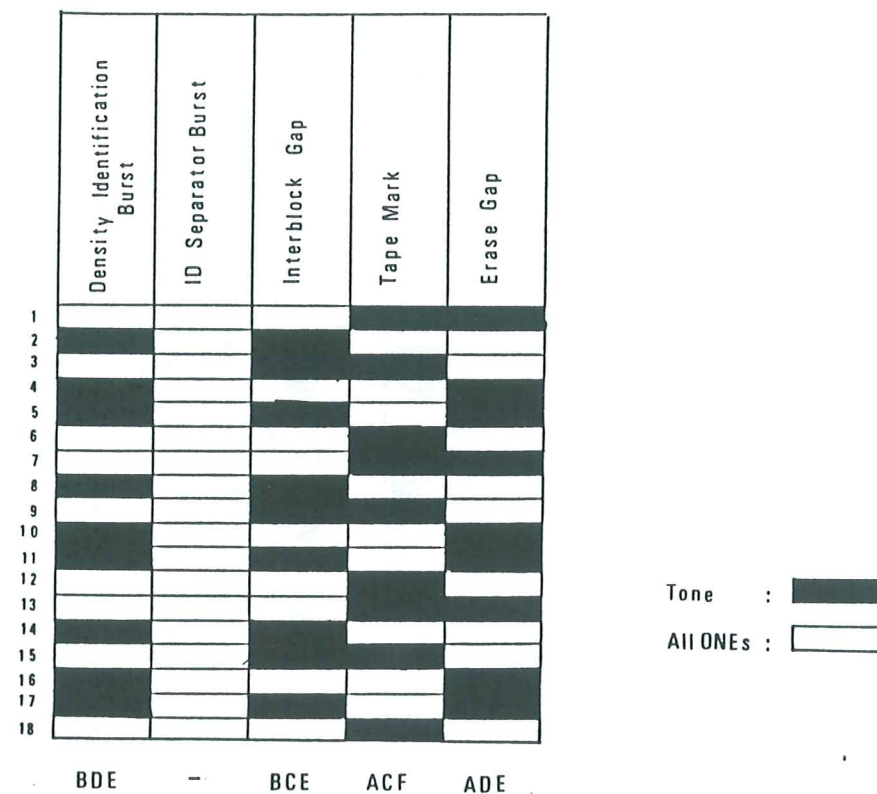

### 12.8.2 Arrangement of Recording on the Tape

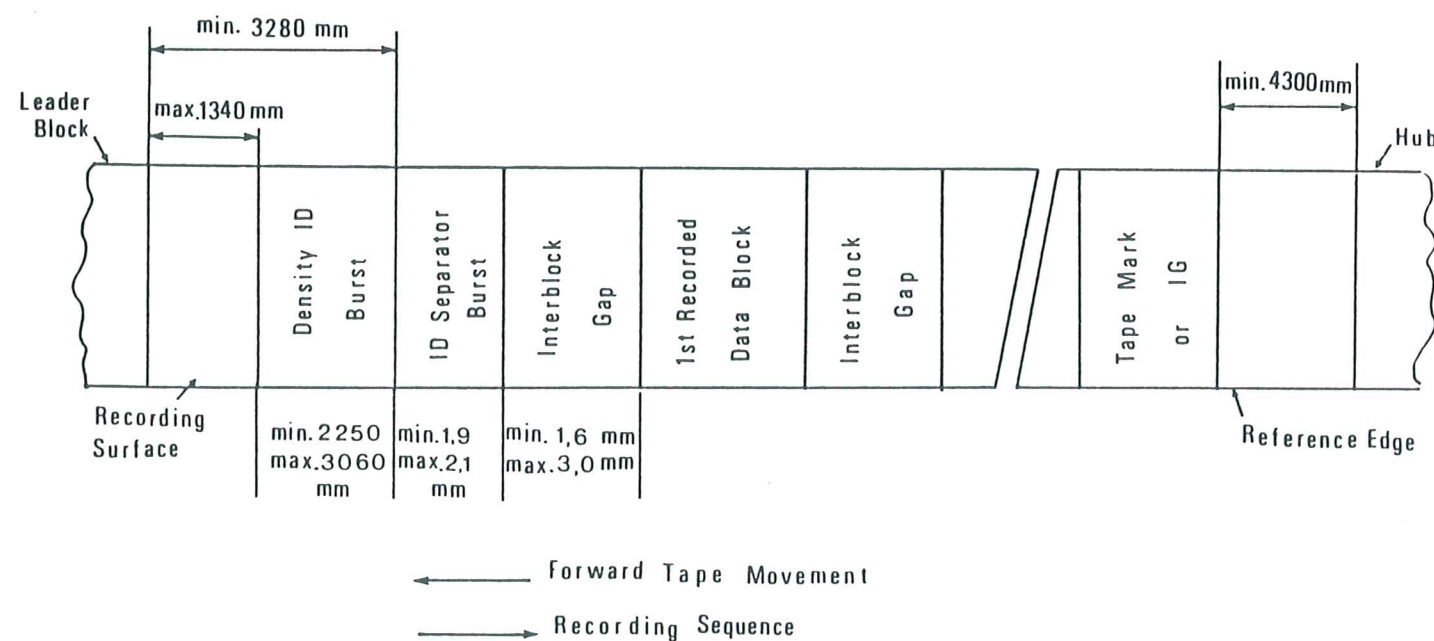

## 12.9 Transform Change Records (TCRs)

These special data records allow Recorded Data Blocks written after transformation as defined in this Standard to be intermixed with Recorded Data Blocks written as defined in ECMA-120.

A TCR1 shall be written to indicate, when the tape is moving in the forward direction, that the Recorded Data Blocks are changing from the format requirements of ECMA-120 to the format requirements of this Standard

A TCR2 shall be written to indicate, when the tape is moving in the forward direction, that the Recorded Data Blocks are changing from the format requirements of this Standard to the format requirements of ECMA-120.

A TCR is not required after a Tape Mark. A TCR may be written at BOT to indicate which requirements are met by the first Recorded Data Block. It is not mandatory to write a TCR after a Tape Mark or at BOT.

TCRs shall be recorded on the tape according to the format requirements of ECMA-120.

The two TCRs shall each comprise 28 bytes and shall have identical content, except for Bytes 7 and 18, as follows:

- Byte 1 shall be set to 11000000
- Byte 2 shall express, in binary notation, the value of the Physical Position Indicator at that point along the tape.  
See Appendix L for the method of calculation.
- Bytes 3 to 6 shall be set to all ZEROs.
- Byte 7 shall be set to:  
all ONEs for TCR1  
11111110 for TCR2
- Bytes 8 to 14 shall be set to all ZEROs
- Byte 15 shall have the same content as Byte 2
- Bytes 16 and 17 shall be set to all ONEs
- Byte 18 shall have the same content as Byte 7
- Bytes 19 to 25 shall be set to all ZEROs
- Byte 26 shall be set to 00000111
- Bytes 27 to 28 shall contain CRC Byte 1 and CRC Byte 2, respectively, computed sequentially over the previous 26 bytes as described in Appendix K.



**SECTION V**

**APPENDICES**

- A - RECOMMENDATIONS FOR TRANSPORTATION
- B - INHIBITOR TAPE
- C - TAPE ABRASIVITY MEASUREMENT PROCEDURE
- D - RECOMMENDATIONS ON TAPE DURABILITY
- E - PRE-RECORDING CONDITION
- F - REPRESENTATION OF 8-BIT BYTES BY 9-BIT PATTERNS
- G - MEASUREMENT OF BIT SHIFT
- H - DIMENSIONS OF THE CARTRIDGE
- J - SUMMARY OF DATA FLOW
- K - IMPLEMENTATION OF A CRC
- L - CALCULATION OF A PHYSICAL POSITION INDICATOR
- M - REGISTRATION OF ALGORITHM

**APPENDIX A**  
**(informative)**

**RECOMMENDATIONS FOR TRANSPORTATION**

**A.1 ENVIRONMENT**

It is recommended that during transportation the cartridges are kept within the following conditions:

**A.1.1 Unrecorded Cartridges**

- Temperature : -23 °C to 48 °C
  - Relative Humidity : 5 % to 100 %
  - Wet Bulb Temperature : 26 °C max.
  - Duration : 10 consecutive days max.
- There shall be no condensation in or on the cartridge.

**A.1.2 Recorded Cartridges**

- Temperature : 5 °C to 32 °C
  - Relative Humidity : 5 % to 80 %
  - Wet Bulb Temperature : 26 °C max.
- There shall be no condensation in or on the cartridge.

**A.2 HAZARDS**

Transportation of recorded cartridges involves three basic potential hazards.

**A.2.1 Impact Loads and Vibration**

The following recommendations should minimize damage during transportation.

- i) Avoid mechanical loads that would distort the cartridge shape.
- ii) Avoid dropping the cartridge more than 1 m.
- iii) Cartridges should be fitted into a rigid box containing adequate shock-absorbent material.
- iv) The final box must have a clean interior and a construction that provides sealing to prevent the ingress of dirt and water.
- v) The orientation of the cartridges within the final box should be such that their axes are horizontal.
- vi) The final box should be clearly marked to indicate its correct orientation.

**A.2.2 Extremes of Temperature and Humidity**

- i) Extreme changes in temperature and humidity should be avoided whenever possible.



- ii) Whenever a cartridge is received it should be conditioned in the operating environment for a period of at least 24 hours.

#### A.2.3 Effects of Stray Magnetic Fields

A nominal spacing of not less than 80 mm should exist between the cartridge and the outer surface of the shipping container. This should minimize the risk of corruption.

## APPENDIX B (informative)

### INHIBITOR TAPE

Any tape that reduces the performance of the tape drive or other tapes is called an inhibitor tape. Certain tape characteristics can contribute to poor tape drive performance. These characteristics include: high abrasiveness, high static friction to tape path components, poor edge conditions, excessive tape wear debris, interlayer slippage, transfer of oxide coating to the back of the next tape layer, separation of tape constituents causing deposits that may lead to tape sticking or poor performance of other tapes. Tapes that have these characteristics may not give satisfactory performance and can result in excessive errors.

Tapes to be used in this cartridge should not be inhibitor tapes.

APPENDIX C  
(normative)

TAPE ABRASIVITY MEASUREMENT PROCEDURE

Tape abrasivity is the tendency of the tape to wear the tape transport.

Install a clean ferrite wear bar made as shown in figure C1 on a holding fixture similar to that shown in figure C2. The test edge facing upward shall be unworn and free of chips or voids greater than  $1\text{ }\mu\text{m}$  in size. The radius of the test edge must not be greater than  $13\text{ }\mu\text{m}$ .

The material of the ferrite bar shall be single-phase polycrystalline ferrite. It shall have the following weight percentages:

ZnO	22%
NiO	11%
Fe <sub>2</sub> O <sub>3</sub>	67%

Its average grain size shall be  $7,2\text{ }\mu\text{m} \pm 2\text{ }\mu\text{m}$ . Its density shall not be less than  $5,32\text{ g/cm}^3$ .

NOTE C1

*Such material should be available as "Sumitomo H4R2 or H4R3" from Sumitomo Special Metals Div. in Torrance (California), USA.*

The surface finish on all four sides of the bar shall be at least of roughness grade N2 (ISO 1302).

Install the test fixture on a tape transport so that the wrap angle of the tape over the bar is  $8^\circ$  on each side for  $16^\circ$  of total wrap.

Set the tape tension at the bar at 1,4 N.

With a tape speed of 1 m/s, make one pass of the tape over the wear bar. The length of tape passing over the wear bar shall be  $520\text{ m} \pm 2,5\text{ m}$ . This length may be segmented into the appropriate number of cartridges.

Remove the holding fixture from the transport and measure the length of the flat worn on the wear bar. This measurement is most easily made using a microscope of known magnification, a camera, and a reference reticule. Magnification of 300 times or higher is recommended.

Measurements should be taken across the 1/4, 1/2 and 3/4 points of the 12,65 mm width of the wear pattern. The three readings are averaged and the average length is used. Figure C3 shows a typical wear pattern and the points of measurements.

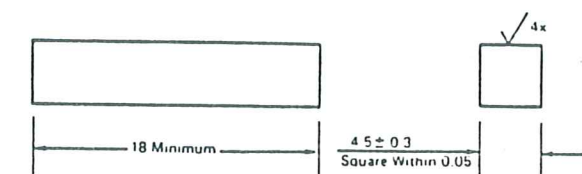


Figure C1 - Ferrite Wear Bar



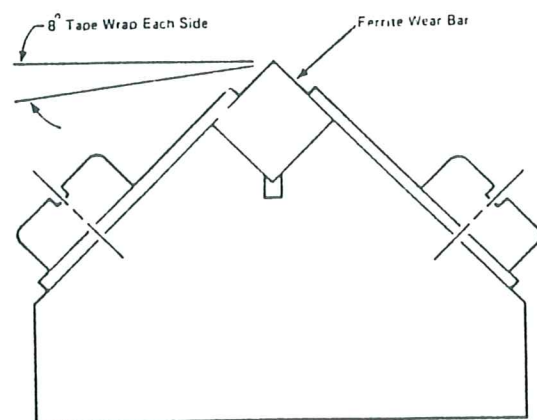


Figure C2 - Wear Bar Holding Fixture

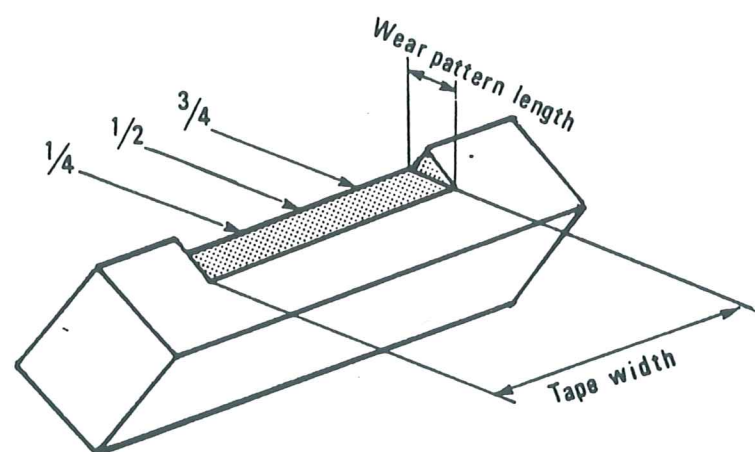


Figure C3 - Typical Wear Pattern. Ferrite Bar following abrasivity test illustrating three locations for wear length measurement (the amount of wear is exaggerated for clarity).

## APPENDIX D (informative)

### RECOMMENDATIONS ON TAPE DURABILITY

When delivered from the supplier the tape of a new cartridge should meet the following requirements.

Testing and measurements performed on the cartridge using an appropriate drive are described below. The test must be performed in the operating environment (see 5.2) for the tape and the tape drive.

#### D.1 SHORT-LENGTH DURABILITY/RELIABILITY

D.1.1 The short-length durability/reliability is the ability of the tape to withstand the wearing action encountered during repeated access to a short file of data. A permanent missing pulse is one that persists for ten consecutive read passes.

D.1.2 No permanent coincident missing pulse zones are permitted for a minimum of 40000 read forward passes. In addition, no more than one permanent coincident missing pulse zone is permitted on the average for each 80000 read forward passes.

##### D.1.3 Procedure

Ensure the tape drive is clean before starting this test.

As a test sample, use a minimum of four cartridges, written in the area of the tape free of coincident missing pulse zones. The area to be tested on each cartridge should start approximately 10 m or 500 records of 25000 bytes each past the tape load point. The test area should consist of 1 m or 50 such records.

Each test cycle consists of starting at the beginning of the test area and accessing each record in the test area before returning to the beginning of the test area. For a complete test, 80000 cycles should be made on each cartridge. Ten attempts to read forward should be made for each coincident missing pulse zone before a permanent coincident missing pulse zone is logged.

Tape path cleaning between passes is not permitted for this test.

#### D.2 LONG-LENGTH DURABILITY/RELIABILITY

D.2.1 The long-length durability/reliability is the ability of the tape to resist the wearing action encountered while cycling full-length passes on a tape drive. This is not a test for end of life for the tape.

D.2.2 The cartridges should meet the following requirements.

- i) The number of coincident missing pulse zones for the first 200 full length passes should not be more than 6 per 165 m of tape.
- ii) No 165 m length of tape should have more than 12 coincident missing pulse zones on any single pass.

### D.2.3 Procedure

Clean the tape drive before starting this test. Tape path cleaning between passes is not permitted for this test. The whole length of tape should be written continuously or with records of at least 16000 bytes.

## APPENDIX E

(normative)

### PRE-RECORDING CONDITION

#### E.1 EXPLANATION

The pre-recording condition is the remanent magnetic moment of the recording surface. The remanent magnetic moment is the magnetic moment of the recording surface in the absence of any magnetizing field. The maximum remanent magnetic moment of the recording surface is the remanent magnetic moment of the recording surface after subjecting the recording surface to a magnetizing field of 350 kA/m. The recording surface may have been subjected to a high magnetizing field, e.g. during manufacture, during testing, or by use on a magnetic recording system that leaves areas of surface that have been DC erased or contain low density transitions. As the resulting high magnetic moment can impair the operation of the recording system it is necessary to ensure that, before recording, the remanent state has been reduced to, at most, the level specified in 6.17.

#### E.2 PROCEDURE

The magnetic moment shall be measured using a vibrating sample magnetometer (VSM), following these steps:

- 1) Cut a circular sample of diameter 6 mm to 12 mm from the parent tape.
- 2) Identify the longitudinal (coating) direction of the sample.
- 3) Mount the sample on the VSM sample holder with the longitudinal direction aligned from pole to pole.
- 4) Centre the sample between the poles in accordance with the VSM manufacturer's instructions.

#### NOTE E1

*Do not expose the sample to any stray magnetic fields greater than 4 kA/m during preparation or mounting.*

- 5) Measure the remanent magnetic moment of the sample.
- 6) Rotate the sample 180° and repeat steps 4 and 5.
- 7) Cycle the sample four times around the hysteresis loop using a peak field of 350 kA/m.
- 8) Measure the positive and negative values of maximum remanent magnetic moment.
- 9) Compare the ratio of values obtained in steps 5 and 8.



APPENDIX F  
(normative)

REPRESENTATION OF 8-BIT BYTES BY 9-BIT PATTERNS

The 8-bit bytes are represented with the most-significant bit to the left and the least significant bit to the right.

The 9-bit patterns are represented with the bit recorded first to the left and the bit recorded last to the right.

8-bit byte	9-bit pattern	8-bit byte	9-bit pattern
00000000	011001011	00110000	011100011
00000001	011001001	00110001	001100011
00000010	001001101	00110010	001110010
00000011	101100011	00110011	001110011
00000100	011001010	00110100	010100011
00000101	101100101	00110101	001110101
00000110	101100110	00110110	001110110
00000111	101100111	00110111	001110111
00001000	011001111	00111000	111100011
00001001	101101001	00111001	001111001
00001010	101101010	00111010	001111010
00001011	101101011	00111011	001111011
00001100	011001110	00111100	110100011
00001101	101101101	00111101	001111101
00001110	101101110	00111110	001111110
00001111	101101111	00111111	001111111
00010000	001001011	01000000	010001011
00010001	001001001	01000001	010001001
00010010	011001101	01000010	010010010
00010011	100100011	01000011	010010011
00010100	001001010	01000100	010001010
00010101	100100101	01000101	010010101
00010110	100100110	01000110	010010110
00010111	100100111	01000111	010010111
00011000	001001111	01001000	010001111
00011001	100101001	01001001	010011001
00011010	100101010	01001010	010011010
00011011	100101011	01001011	010011011
00011100	001001110	01001100	010001110
00011101	100101101	01001101	010011101
00011110	100101110	01001110	010011110
00011111	100101111	01001111	010011111
00100000	101001111	01010000	011100101
00100001	101001101	01010001	001100101
00100010	001010010	01010010	010110010
00100011	001010011	01010011	010110011
00100100	101001110	01010100	010100101
00100101	001010101	01010101	010110101
00100110	001010110	01010110	010110110
00100111	001010111	01010111	010110111
8 1	9 1	8 1	9 1

00101000	101001011	01011000	111100101
00101001	001011001	01011001	010111001
00101010	001011010	01011010	010111010
00101011	001011011	01011011	010111011
00101100	101001010	01011100	110100101
00101101	001011101	01011101	010111101
00101110	001011110	01011110	010111110
00101111	001011111	01011111	010111111
01100000	011100110	10010000	011101001
01100001	001100110	10010001	001101001
01100010	011010010	10010010	100110010
01100011	011010011	10010011	100110011
01100100	010100110	10010100	010101001
01100101	011010101	10010101	100110101
01100110	011010110	10010110	100110110
01100111	011010111	10010111	100110111
01101000	111100110	10011000	111101001
01101001	011011001	10011001	100111001
01101010	011011010	10011010	100111010
01101011	011011011	10011011	100111011
01101100	110100110	10011100	110101001
01101101	011011101	10011101	100111101
01101110	011011110	10011110	100111110
01101111	011011111	10011111	100111111
01110000	011100111	10100000	011101010
01110001	001100111	10100001	001101010
01110010	011110010	10100010	101010010
01110011	011110011	10100011	101010011
01110100	010100111	10100100	010101010
01110101	011110101	10100101	101010101
01110110	011110110	10100110	101010110
01110111	011110111	10100111	101010111
01111000	111100111	10101000	111101010
01111001	011111001	10101001	101011001
01111010	011111010	10101010	101011010
01111011	011111011	10101011	101011011
01111100	110100111	10101100	110101010
01111101	011111101	10101101	101011101
01111110	011111110	10101110	101011110
01111111	011111111	10101111	101011111
10000000	111001011	10110000	011101011
10000001	111001001	10110001	001101011
10000010	100010010	10110010	101110010
10000011	100010011	10110011	101110011
10000100	111001010	10110100	010101011
10000101	100010101	10110101	101110101
10000110	100010110	10110110	101110110
10000111	100010111	10110111	101110111
10001000	111001111	10111000	111101011
10001001	100011001	10111001	101111001
10001010	100011010	10111010	101111010
10001011	100011011	10111011	101111011

8 1

9 1

8 1

9 1

10001100	111001110	10111100	110101011
10001101	100011101	10111101	101111101
10001110	100011110	10111110	101111110
10001111	100011111	10111111	101111111
11000000	110001011	11100000	011101110
11000001	110001001	11100001	001101110
11000010	110010010	11100010	111010010
11000011	110010011	11100011	111010011
11000100	110001010	11100100	010101110
11000101	110010101	11100101	111010101
11000110	110010110	11100110	111010110
11000111	110010111	11100111	111010111
11001000	110001111	11101000	111101110
11001001	110011001	11101001	111011001
11001010	110011010	11101010	111011010
11001011	110011011	11101011	111011011
11001100	110001110	11101100	110101110
11001101	110011101	11101101	111011101
11001110	110011110	11101110	111011110
11001111	110011111	11101111	111011111
11010000	011101101	11110000	011101111
11010001	001101101	11110001	001101111
11010010	110110010	11110010	111110010
11010011	110110011	11110011	111110011
11010100	010101101	11110010	010101111
11010101	110110101	11110101	111110101
11010110	110110110	11110110	111110110
11010111	110110111	11110111	111110111
11011000	111101101	11111000	111101111
11011001	110111001	11111001	111111001
11011010	110111010	11111010	111111010
11011011	110111011	11111011	111111011
11011100	110101101	11111100	110101111
11011101	110111101	11111101	111111101
11011110	110111110	11111110	111111110
11011111	110111111	11111111	111111111

8 1

9 1

8 1

9 1



## APPENDIX G

(normative)

### MEASUREMENT OF BIT SHIFT

The equipment normally used for recording interchange cartridges shall be used for recording the tape under test.

The tape shall be in the pre-recording condition as defined in 6.17.

The tape shall be written in any start/stop mode compatible with system operation.

#### G.1 READ EQUIPMENT

The tape shall be read on any tape transport in which the speed is within 1 % of nominal speed.

There are no absolute requirements on the output voltage from the read head. However, the head design and the tape speed shall be chosen to avoid problems from low signal-to-noise ratios.

##### - Read Head

. Inductive head: The gap length shall be less than 0,63  $\mu\text{m}$ .

. Magneto-resistive head: The effective read gap, calculated from the geometric mean of the distances from the element to each shield, shall be less than 0,63  $\mu\text{m}$ .

##### - Read Channel

The frequency response of the head and read amplifier shall meet the following specification when tested with a wire placed close to and parallel to the read gap.

For an inductive head, the overall response shall be within 1 dB from a +6 dB/octave line over the frequency range corresponding to one twentieth of the ONEs frequency to 2,0 times the ONEs frequency. For example, a tape transport operated at 762 mm/s shall require a frequency range of 18,5 kHz to 740,7 kHz. The phase response shall be within 2° of a straight line over the same frequency range.


For a magneto-resistive head, the overall response shall be within 1 dB of flat over the above frequency range and the phase response shall be within 2° of a straight line over the same frequency range.

Response of either read channel shall roll off at 18 dB/octave starting at 2,0 times the ONEs frequency.

#### G.2 MEASUREMENT

The average bit cell length (L) is obtained from any pair of reference zero crossings (RZC) located on either side of the test zero crossing (TZC). A reference zero crossing is a ONE zero crossing with at least two adjacent ONE zero crossings on each side. The reference zero crossings shall not be more than 40 bit cells apart to keep the maximum error due to rate-of-change under 2 %.

### G.3 DATA ANALYSIS

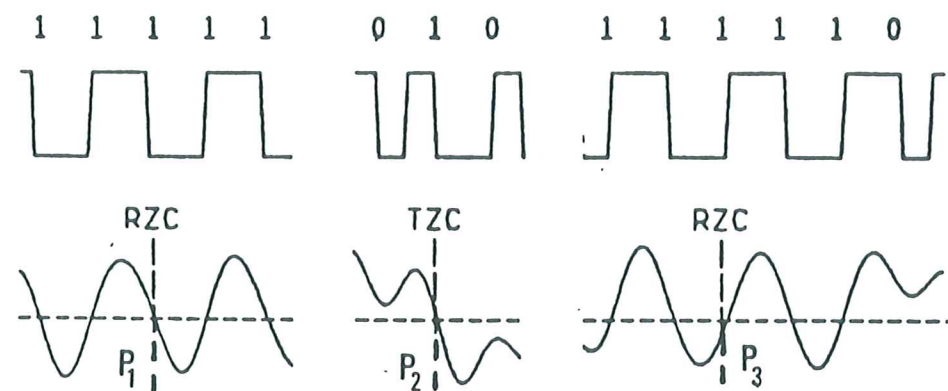

if  $n$  is the number of bit cells between reference zero crossings, the average bit cell length is:

$$L = \frac{P_3 - P_1}{n}$$

where:

$P_n$  is the position of the  $n$ -th ONE zero crossing.

If there are  $m$  bit intervals between the first reference zero crossing and the test zero crossing, then:

$$\text{Bit shift in \%} = \frac{|mL - (P_2 - P_1)|}{L}$$

### APPENDIX H (informative)

#### DIMENSIONS OF THE CARTRIDGE

For convenience this Appendix lists the values of the linear dimensions and of the angles shown in the drawings.

TABLE H.1 - Linear Dimensions

#### METRIC UNITS

mm

$L_1$	$125,00 \pm 0,32$
$L_2$	$109,00 \pm 0,32$
$L_3$	$24,50 \left\{ \begin{array}{l} + 0,50 \\ - 0,32 \end{array} \right.$
$L_4$	$11,80 \pm 0,25$
$L_5$	$15,60 \pm 0,25$
$L_6$	$7,40 \pm 0,25$
$L_7$	$12,00 \pm 0,25$
$L_8$	$2,55 \text{ min.}$
$L_9$	$7,00 \pm 0,25$
$L_{10}$	$80,00 \left\{ \begin{array}{l} + 0,30 \\ - 0,16 \end{array} \right.$
$L_{11}$	$12,30 \pm 0,25$
$L_{12}$	$0,50 \pm 0,25$
$L_{13}$	$31,00 \pm 0,25$
$L_{14}$	$75,00 \left\{ \begin{array}{l} + 0,30 \\ - 0,16 \end{array} \right.$
$L_{15}$	$4,70 \pm 0,25$
$L_{16}$	$14,90 \pm 0,32$
$L_{17}$	$7,50 \pm 0,25$



L <sub>18</sub>	87,10 ± 0,25
L <sub>19</sub>	4,00 ± 0,25
L <sub>20</sub>	106 ± 0,25
L <sub>21</sub>	5,00 ± 0,25
L <sub>22</sub>	7,00 ± 0,25
L <sub>23</sub>	104,00 ± 0,25
L <sub>24</sub>	2,50 ± 0,25
L <sub>25</sub>	108,50 ± 0,25
L <sub>26</sub>	3,50 ± 0,25
L <sub>27</sub>	105,50 ± 0,25
L <sub>28</sub>	31,25 ± 0,25
L <sub>29</sub>	54,50 ± 0,25
L <sub>30</sub>	3,30 ± 0,25
L <sub>31</sub>	18,40 ± 0,25
L <sub>32</sub>	113,2 ± 0,3
L <sub>33</sub>	26,00 ± 0,25
L <sub>34</sub>	61,00 ± 0,25
L <sub>35</sub>	5,00 ± 0,25
L <sub>36</sub>	1,00 ± 0,16
L <sub>37</sub>	74,50 ± 0,25
L <sub>38</sub>	31,00 ± 0,25
L <sub>39</sub>	7,50 ± 0,32
L <sub>40</sub>	79,50 ± 0,25
L <sub>41</sub>	13,05 $\left\{ \begin{array}{l} + 0,20 \\ - 0,10 \end{array} \right.$
L <sub>42</sub>	1,90 $\left\{ \begin{array}{l} + 1,40 \\ - 0,90 \end{array} \right.$
L <sub>43</sub>	0,4 $\left\{ \begin{array}{l} + 1,0 \\ - 0,5 \end{array} \right.$
L <sub>44</sub>	2,27 ± 0,12
L <sub>45</sub>	0,65 ± 0,09
L <sub>46</sub>	8,1 ± 0,2
L <sub>47</sub>	12,25 nominal
L <sub>48</sub>	4 nominal
L <sub>49</sub>	2 nominal
L <sub>50</sub>	31,80 ± 0,04

L <sub>51</sub>	6,8 ± 0,1
L <sub>52</sub>	21,8 ± 0,2
L <sub>53</sub>	10,93 $\left\{ \begin{array}{l} + 0,06 \\ - 0,08 \end{array} \right.$
L <sub>54</sub>	5,46 ± 0,10
L <sub>55</sub>	6,00 ± 0,25
L <sub>56</sub>	16,5 $\left\{ \begin{array}{l} + 0,0 \\ - 0,2 \end{array} \right.$
L <sub>57</sub>	5,2 ± 0,2
L <sub>58</sub>	1,90 ± 0,26
L <sub>59</sub>	2,5 max.
L <sub>60</sub>	5,04 ± 0,20
L <sub>61</sub>	3,9 ± 0,5
L <sub>62</sub>	16,9 $\left\{ \begin{array}{l} + 0,5 \\ - 0,4 \end{array} \right.$
L <sub>63</sub>	3,0 ± 0,5
L <sub>64</sub>	11,6 ± 0,5
L <sub>65</sub>	86,9 nominal
L <sub>66</sub>	54,5 nominal
R <sub>1</sub>	3,00 max.
R <sub>2</sub>	4,00 max.
R <sub>3</sub>	3,00 min.
R <sub>4</sub>	1,00 max
R <sub>5</sub>	4,00 ± 0,25
R <sub>6</sub>	1,50 ± 0,25
R <sub>7</sub>	1,50 ± 0,25
R <sub>8</sub>	145,50 ± 0,25
R <sub>9</sub>	145,50 ± 0,25
R <sub>10</sub>	0,08 max.
R <sub>11</sub>	0,25 max.
R <sub>12</sub>	0,10 < R <sub>12</sub> < 0,30
R <sub>13</sub>	25,00 ± 0,25
R <sub>14</sub>	1,4 ± 0,2
R <sub>15</sub>	5,50 ± 0,25

d <sub>1</sub>	43,5	$\left\{ \begin{array}{l} + 2,0 \\ - 1,0 \end{array} \right.$
d <sub>2</sub>	35,0	$\left\{ \begin{array}{l} + 0,2 \\ - 1,2 \end{array} \right.$
d <sub>3</sub>	11,15	$\pm 0,05$
d <sub>4</sub>	36,0	$\left\{ \begin{array}{l} + 0,5 \\ - 0,0 \end{array} \right.$
d <sub>5</sub>	41,00	$\pm 0,25$
d <sub>6</sub>	50,0	$\left\{ \begin{array}{l} + 0,0 \\ - 0,2 \end{array} \right.$
d <sub>7</sub>	7,0	$\pm 0,2$
d <sub>8</sub>	4,0	$\pm 0,2$
d <sub>9</sub>	2,0	$\pm 0,5$
d <sub>10</sub>	10,0	$\pm 0,2$
e <sub>1</sub>	1,51	$\pm 0,10$


TABLE H.2 - Angles

$\alpha$	$50^\circ \pm 1^\circ$
$\beta$	$1^\circ 30' \pm 30'$
$\gamma$	$2^\circ \pm 30'$
$\delta$	$30^\circ \pm 30'$
$\theta$	$16^\circ \pm 30'$
$\lambda$	$40^\circ \pm 30'$
$\rho$	$15^\circ \pm 30'$
$\phi$	$30^\circ$ nominal
$\psi$	$11^\circ 3' \pm 5'$
$\mu_1$	$90^\circ \pm 2^\circ$
$\mu_2$	$8^\circ \left\{ \begin{array}{l} + 0^\circ \\ - 3^\circ \end{array} \right.$
$\mu_3$	$44^\circ \left\{ \begin{array}{l} + 0^\circ \\ - 3^\circ \end{array} \right.$
$\mu_4$	$38^\circ \pm 2^\circ$
$\mu_5$	$48^\circ \pm 3^\circ$
$\omega_1$	$1^\circ \pm 30'$
$\omega_2$	$20^\circ \pm 2^\circ$



APPENDIX J  
(informative)

SUMMARY OF DATA FLOW

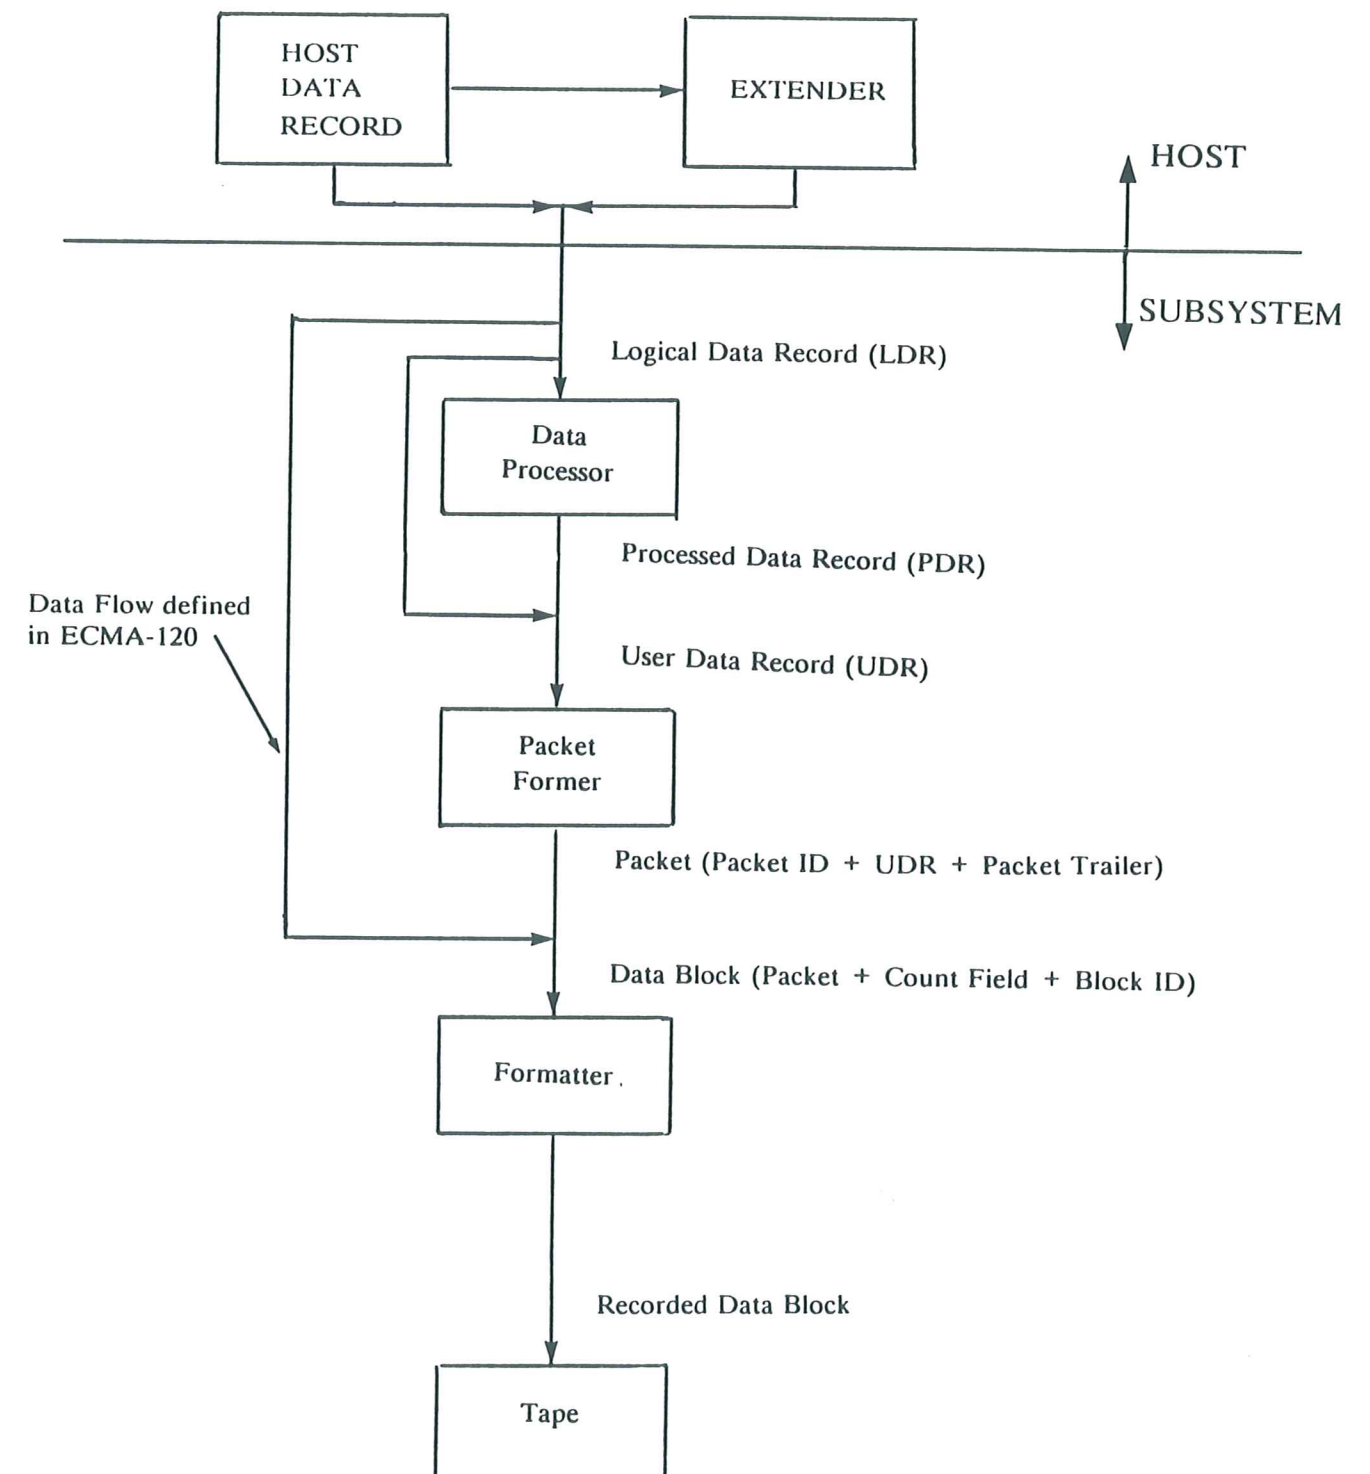

# APPENDIX K (normative)

## IMPLEMENTATION OF A CRC

### K.1 DESCRIPTION


Each CRC shall consist of 16 bits and be represented by two bytes, CRC 1 and CRC 2.

### K.2 COMPUTATION

The CRC shall be computed from the generator polynomial

$$x^{16} + x^{15} + x^8 + x + 1$$

as shown in the following shift register representation:

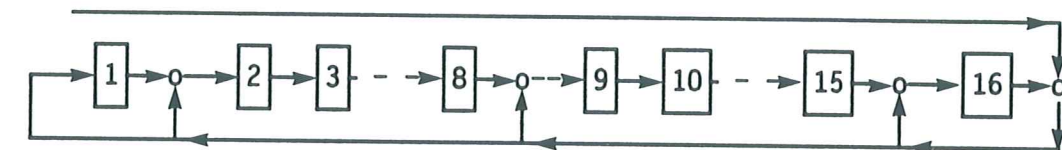

where o indicates modulo two addition.

Prior to the computation all positions of the shift register shall be set to ZERO.

Bits within a byte shall be processed starting with bit 8, the least significant bit, and ending with bit 1, the most significant bit.

### K.3 ALLOCATION OF BITS TO CRC 1 AND CRC 2

On completion of the computation the bits in the shift register shall be allocated to the bit positions in the two CRC bytes as follows:

	CRC Byte 1	CRC Byte 2
Bits in the shift register	9 to 16	1 to 8
Bit position in the CRC Bytes	8 to 1	8 to 1



**APPENDIX L**  
**(normative)**

**CALCULATION OF A PHYSICAL POSITION INDICATOR**

**L.1 DESCRIPTION**

Physical Position Indicators (PPIs) are used to provide a coarse, fast indication of the location of the data along the length of the tape without the necessity for reading the data or all the Block-ID bytes.

**L.2 CALCULATION**

At any point along the length of the tape the value of a PPI shall be:

$$62,5 \left( \sqrt{\frac{625 + R_0^2 - R^2}{R}} - \frac{25}{R_0} \right)$$

and rounded up to the next higher positive integer

where:

$R_0$  is the radius of the fully loaded reel of tape in millimetres

$R$  is the current radius of the reel of tape in millimetres.

**L.3 REQUIREMENT**

The value shall lie in the range

$$1 \leq \text{PPI} \leq 91$$

**APPENDIX M**  
**(informative)**

**REGISTRATION OF ALGORITHMS**

It is expected that an international scheme for the registration of algorithms will be established. Its implementation will be handled by a Registration Authority to be appointed by the ISO/IEC Councils.

It is recommended that the numeric identifiers will be allocated by the Registration Authority as follows:

000	shall not be used,
001	shall not be used,
002 to 253	shall indicate the applicable registered algorithm identification,
254	shall not be used (may be used later as escape character for extension of the identifiers numbers).

If the algorithm has not been registered and is, thus, unknown, the value 255 shall specify this.



