

Standard ECMA-262
3rd Edition - December 1999

ECMA

Standardizing Information and Communication Systems

**ECMAScript 3.1 Language
Specification - DRAFT**

Standard ECMA-262

3rd Edition - December 1999

ECMA

Standardizing Information and Communication Systems

Standard ECMA-262
3rd Edition - December 1999

ECMA

Standardizing Information and Communication Systems

**ECMAScript 3.1 Language
Specification - DRAFT**

Brief History

This ECMA Standard is based on several originating technologies, the most well known being JavaScript (Netscape) and JScript (Microsoft). The language was invented by Brendan Eich at Netscape and first appeared in that company's Navigator 2.0 browser. It has appeared in all subsequent browsers from Netscape and in all browsers from Microsoft starting with Internet Explorer 3.0.

The development of this Standard started in November 1996. The first edition of this ECMA Standard was adopted by the ECMA General Assembly of June 1997.

That ECMA Standard was submitted to ISO/IEC JTC 1 for adoption under the fast-track procedure, and approved as international standard ISO/IEC 16262, in April 1998. The ECMA General Assembly of June 1998 approved the second edition of ECMA-262 to keep it fully aligned with ISO/IEC 16262. Changes between the first and the second edition are editorial in nature.

The third edition of the Standard includes powerful regular expressions, better string handling, new control statements, try/catch exception handling, tighter definition of errors, formatting for numeric output and minor changes in anticipation of forthcoming internationalisation facilities and future language growth. The language documented by the third edition has come to be known as ECMAScript 3 or ES3.

Work on the language is not complete. The technical committee is working on significant enhancements, including mechanisms for scripts to be created and used across the Internet, and tighter coordination with other standards bodies such as groups within the World Wide Web Consortium and the Wireless Application Protocol Forum.

Deleted: current document defines the

Deleted: and

Deleted: This Standard has been adopted as 3rd Edition of ECMA-262 by the ECMA General Assembly in December, 1999.

Table of contents

1	Scope	1
2	Conformance	1
3	References	1
4	Overview	1
4.1	Web Scripting	2
4.2	Language Overview	2
4.2.1	Objects	2
4.2.2	The Strict Variant of ECMAScript	3
4.3	Definitions	4
4.3.1	Type	4
4.3.2	Primitive Value	4
4.3.3	Object	4
4.3.4	Constructor	4
4.3.5	Prototype	4
4.3.6	Native Object	4
4.3.7	Built-in Object	4
4.3.8	Host Object	4
4.3.9	Undefined Value	5
4.3.10	Undefined Type	5
4.3.11	Null Value	5
4.3.12	Null Type	5
4.3.13	Boolean Value	5
4.3.14	Boolean Type	5
4.3.15	Boolean Object	5
4.3.16	String Value	5
4.3.17	String Type	5
4.3.18	String Object	5
4.3.19	Number Value	5
4.3.20	Number Type	5
4.3.21	Number Object	5
4.3.22	Infinity	5
4.3.23	NaN	6
4.3.24	Function	6
4.3.25	Built-in Function	6
4.3.26	Property	6
4.3.27	Method	6
4.3.28	Attribute	6
4.3.29	Own Property	6
4.3.30	Inherited Property	6
4.3.31	Built-in Method	6
5	Notational Conventions	7
5.1	Syntactic and Lexical Grammars	7
5.1.1	Context-Free Grammars	7

5.1.2	The Lexical and RegExp Grammars	7
5.1.3	The Numeric String Grammar	7
5.1.4	The Syntactic Grammar	7
5.1.5	The Use Strict Directive Grammar	8
5.1.6	The JSON Grammar	8
5.1.7	Grammar Notation	8
5.2	Algorithm Conventions	10
6	Source Text	12
7	Lexical Conventions	12
7.1	Unicode Format-Control Characters	13
7.2	White Space	13
7.3	Line Terminators	14
7.4	Comments	14
7.5	Tokens	15
7.5.1	Reserved Words	15
7.5.2	Keywords	15
7.5.3	Future Reserved Words	16
7.6	Identifiers	16
7.7	Punctuators	17
7.8	Literals	17
7.8.1	Null Literals	18
7.8.2	Boolean Literals	18
7.8.3	Numeric Literals	18
7.8.4	String Literals	20
7.8.5	Regular Expression Literals	22
7.9	Automatic Semicolon Insertion	23
7.9.1	Rules of Automatic Semicolon Insertion	23
7.9.2	Examples of Automatic Semicolon Insertion	24
8	Types	26
8.1	The Undefined Type	26
8.2	The Null Type	26
8.3	The Boolean Type	26
8.4	The String Type	26
8.5	The Number Type	26
8.6	The Object Type	27
8.6.1	Property Attributes	28
8.6.2	Object Internal Properties and Methods	29
8.7	The Reference Specification Type	32
8.7.1	GetValue (V)	32
8.7.2	PutValue (V, W)	32
8.8	The List Specification Type	33
8.9	The Completion Specification Type	33
8.10	The Property Descriptor and Property Identifier Specification Types	33
8.10.1	IsAccessorDescriptor (Desc)	34
8.10.2	IsDataDescriptor (Desc)	34

8.10.3	IsGenericDescriptor (Desc)	34
8.10.4	FromPropertyDescriptor (Desc)	34
8.10.5	ToPropertyDescriptor (Obj)	35
8.11	The Lexical Environment and Environment Record Specification Types	35
8.12	Algorithms for Object Internal Methods	35
8.12.1	[[GetOwnProperty]] (P)	35
8.12.2	[[GetProperty]] (P)	35
8.12.3	[[Get]] (P)	36
8.12.4	[[CanPut]] (P)	36
8.12.5	[[ThrowingPut]] (P, V, Throw)	36
8.12.6	[[Put]] (P, V)	37
8.12.7	[[HasProperty]] (P)	37
8.12.8	[[Delete]] (P, Throw)	37
8.12.9	[[DefaultValue]] (hint)	37
8.12.10	[[DefineOwnProperty]] (P, Desc, Throw)	38
9	Type Conversion and Testing	39
9.1	ToPrimitive	39
9.2	ToBoolean	39
9.3	ToNumber	40
9.3.1	ToNumber Applied to the String Type	40
9.4	ToInteger	42
9.5	ToInt32: (Signed 32 Bit Integer)	43
9.6	ToUint32: (Unsigned 32 Bit Integer)	43
9.7	ToUint16: (Unsigned 16 Bit Integer)	43
9.8	ToString	44
9.8.1	ToString Applied to the Number Type	44
9.9	ToObject	45
9.10	CheckObjectCoercible	45
9.11	IsCallable	45
9.12	The SameValue Algorithm	46
10	Executable Code and Execution Contexts	46
10.1	Types of Executable Code	46
10.1.1	Strict Mode Code	46
10.2	Lexical Environments	47
10.2.1	Environment Records	47
10.2.2	Lexical Environment Operations	50
10.2.3	The Global Environment	50
10.3	Execution Contexts	51
10.3.1	Identifier Resolution	51
10.4	Establishing an Execution Context	51
10.4.1	Global Code	52
10.4.2	Eval Code	52
10.4.3	Function Code	52
10.5	Arguments Object	52
10.6	Declaration Binding Instantiation	55

11	Expressions	56
11.1	Primary Expressions	56
11.1.1	The <code>this</code> Keyword	56
11.1.2	Identifier Reference	56
11.1.3	Literal Reference	56
11.1.4	Array Initialiser	56
11.1.5	Object Initialiser	58
11.1.6	The Grouping Operator	60
11.2	Left-Hand-Side Expressions	60
11.2.1	Property Accessors	60
11.2.2	The <code>new</code> Operator	61
11.2.3	Function Calls	61
11.2.4	Argument Lists	62
11.2.5	Function Expressions	62
11.3	Postfix Expressions	62
11.3.1	Postfix Increment Operator	62
11.3.2	Postfix Decrement Operator	63
11.4	Unary Operators	63
11.4.1	The <code>delete</code> Operator	63
11.4.2	The <code>void</code> Operator	63
11.4.3	The <code>typeof</code> Operator	64
11.4.4	Prefix Increment Operator	64
11.4.5	Prefix Decrement Operator	64
11.4.6	Unary <code>+</code> Operator	64
11.4.7	Unary <code>-</code> Operator	64
11.4.8	Bitwise NOT Operator (<code>~</code>)	65
11.4.9	Logical NOT Operator (<code>!</code>)	65
11.5	Multiplicative Operators	65
11.5.1	Applying the <code>*</code> Operator	65
11.5.2	Applying the <code>/</code> Operator	66
11.5.3	Applying the <code>%</code> Operator	66
11.6	Additive Operators	67
11.6.1	The Addition operator (<code>+</code>)	67
11.6.2	The Subtraction Operator (<code>-</code>)	67
11.6.3	Applying the Additive Operators (<code>+</code> , <code>-</code>) to Numbers	67
11.7	Bitwise Shift Operators	68
11.7.1	The Left Shift Operator (<code><<</code>)	68
11.7.2	The Signed Right Shift Operator (<code>>></code>)	68
11.7.3	The Unsigned Right Shift Operator (<code>>>></code>)	69
11.8	Relational Operators	69
11.8.1	The Less-than Operator (<code><</code>)	69
11.8.2	The Greater-than Operator (<code>></code>)	70
11.8.3	The Less-than-or-equal Operator (<code><=</code>)	70
11.8.4	The Greater-than-or-equal Operator (<code>>=</code>)	70
11.8.5	The Abstract Relational Comparison Algorithm	70

11.8.6	The instanceof operator	71
11.8.7	The in operator	71
11.9	Equality Operators	71
11.9.1	The Equals Operator (==)	72
11.9.2	The Does-not-equals Operator (!=)	72
11.9.3	The Abstract Equality Comparison Algorithm	72
11.9.4	The Strict Equals Operator (===)	73
11.9.5	The Strict Does-not-equal Operator (!==)	73
11.9.6	The Strict Equality Comparison Algorithm	73
11.10	Binary Bitwise Operators	74
11.11	Binary Logical Operators	74
11.12	Conditional Operator (?:)	75
11.13	Assignment Operators	76
11.13.1	Simple Assignment (=)	76
11.13.2	Compound Assignment (op=)	77
11.14	Comma Operator (,)	77
12	Statements	78
12.1	Block	78
12.2	Variable statement	79
12.2.1	Strict Mode Restrictions	80
12.3	Empty Statement	80
12.4	Expression Statement	80
12.5	The if Statement	80
12.6	Iteration Statements	81
12.6.1	The do-while Statement	81
12.6.2	The while statement	81
12.6.3	The for Statement	82
12.6.4	The for-in Statement	82
12.7	The continue Statement	83
12.8	The break Statement	84
12.9	The return Statement	84
12.10	The with Statement	84
12.10.1	Strict Mode Restrictions	85
12.11	The switch Statement	85
12.12	Labelled Statements	87
12.13	The throw statement	87
12.14	The try statement	87
12.15	Debugger statement	88
13	Function Definition	88
13.1	Strict Mode Restrictions	90
13.2	Creating Function Objects	90
13.2.1	[[Call]]	90
13.2.2	[[Construct]]	91
14	Program	92

14.1 Use Strict Directive	93
15 Native ECMAScript Objects	94
15.1 The Global Object	94
15.1.1 Value Properties of the Global Object	95
15.1.2 Function Properties of the Global Object	95
15.1.3 URI Handling Function Properties	97
15.1.4 Constructor Properties of the Global Object	101
15.1.5 Other Properties of the Global Object	102
15.2 Object Objects	102
15.2.1 The Object Constructor Called as a Function	102
15.2.2 The Object Constructor	102
15.2.3 Properties of the Object Constructor	102
15.2.4 Properties of the Object Prototype Object	105
15.2.5 Properties of Object Instances	106
15.3 Function Objects	106
15.3.1 The Function Constructor Called as a Function	106
15.3.2 The Function Constructor	107
15.3.3 Properties of the Function Constructor	107
15.3.4 Properties of the Function Prototype Object	108
15.3.5 Properties of Function Instances	110
15.4 Array Objects	110
15.4.1 The Array Constructor Called as a Function	111
15.4.2 The Array Constructor	111
15.4.3 Properties of the Array Constructor	111
15.4.4 Properties of the Array Prototype Object	112
15.4.5 Properties of Array Instances	128
15.5 String Objects	129
15.5.1 The String Constructor Called as a Function	129
15.5.2 The String Constructor	129
15.5.3 Properties of the String Constructor	129
15.5.4 Properties of the String Prototype Object	129
15.5.5 Properties of String Instances	137
15.6 Boolean Objects	138
15.6.1 The Boolean Constructor Called as a Function	138
15.6.2 The Boolean Constructor	138
15.6.3 Properties of the Boolean Constructor	138
15.6.4 Properties of the Boolean Prototype Object	138
15.6.5 Properties of Boolean Instances	139
15.7 Number Objects	139
15.7.1 The Number Constructor Called as a Function	139
15.7.2 The Number Constructor	139
15.7.3 Properties of the Number Constructor	140
15.7.4 Properties of the Number Prototype Object	140
15.7.5 Properties of Number Instances	144
15.8 The Math Object	144
15.8.1 Value Properties of the Math Object	144

15.8.2	Function Properties of the Math Object	145
15.9	Date Objects	149
15.9.1	Overview of Date Objects and Definitions of Internal Operators	149
15.9.2	The Date Constructor Called as a Function	154
15.9.3	The Date Constructor	154
15.9.4	Properties of the Date Constructor	155
15.9.5	Properties of the Date Prototype Object	156
15.9.6	Properties of Date Instances	162
15.10	RegExp (Regular Expression) Objects	162
15.10.1	Patterns	163
15.10.2	Pattern Semantics	164
15.10.3	The RegExp Constructor Called as a Function	176
15.10.4	The RegExp Constructor	176
15.10.5	Properties of the RegExp Constructor	177
15.10.6	Properties of the RegExp Prototype Object	177
15.10.7	Properties of RegExp Instances	178
15.11	Error Objects	179
15.11.1	The Error Constructor Called as a Function	179
15.11.2	The Error Constructor	179
15.11.3	Properties of the Error Constructor	179
15.11.4	Properties of the Error Prototype Object	180
15.11.5	Properties of Error Instances	180
15.11.6	Native Error Types Used in This Standard	180
15.11.7	<i>NativeError</i> Object Structure	180
15.12	The JSON Object	182
15.12.1	The JSON Grammar	182
15.12.2	parse (text [, reviver])	183
15.12.3	stringify (value [, replacer [, space]])	184
16	Errors	189
Annex A		190
A.1	Lexical Grammar	190
A.2	Number Conversions	196
A.3	Expressions	197
A.4	Statements	201
A.5	Functions and Programs	203
A.6	Universal Resource Identifier Character Classes	204
A.7	Regular Expressions	205
Annex B		209
Compatibility		209

B.1	Additional Syntax	209
B.1.1	Numeric Literals	209
B.1.2	String Literals	209
B.2	Additional Properties	210
B.2.1	escape (string)	210
B.2.2	unescape (string)	211
B.2.3	String.prototype.substr (start, length)	211
B.2.4	Date.prototype.getYear ()	212
B.2.5	Date.prototype.setYear (year)	212
B.2.6	Date.prototype.toGMTString ()	212
Annex C		213
The Strict variant of ECMAScript		213
C.1	The <code>strict</code> mode	213
C.1.1	Excluded Features	213
C.1.2	Additional Execution Exceptions	213
Annex D		214
Correction and Clarifications in Edition 3.1 with Possible Compatibility Impact		214
Annex E		215
Additions and Changes in Edition 3.1 which Introduce Incompatibilities with Edition 3.		215

1 Scope

This Standard defines the ECMAScript scripting language.

2 Conformance

A conforming implementation of ECMAScript must provide and support all the types, values, objects, properties, functions, and program syntax and semantics described in this specification.

A conforming implementation of this International standard shall interpret characters in conformance with the Unicode Standard, Version 3.0 or later, and ISO/IEC 10646-1 with either UCS-2 or UTF-16 as the adopted encoding form, implementation level 3. If the adopted ISO/IEC 10646-1 subset is not otherwise specified, it is presumed to be the BMP subset, collection 300. If the adopted encoding form is not otherwise specified, it is presumed to be the UTF-16 encoding form.

A conforming implementation of ECMAScript is permitted to provide additional types, values, objects, properties, and functions beyond those described in this specification. In particular, a conforming implementation of ECMAScript is permitted to provide properties not described in this specification, and values for those properties, for objects that are described in this specification.

A conforming implementation of ECMAScript is permitted to support program and regular expression syntax not described in this specification. In particular, a conforming implementation of ECMAScript is permitted to support program syntax that makes use of the “future reserved words” listed in 7.5.3 of this specification.

3 References

ISO/IEC 9899:1996 Programming Languages – C, including amendment 1 and technical corrigenda 1 and 2.

ISO/IEC 10646-1:1993 Information Technology -- Universal Multiple-Octet Coded Character Set (UCS) plus its amendments and corrigenda.

[The Unicode Consortium. The Unicode Standard, Version 3.0, defined by: The Unicode Standard, Version 3.0 \(Boston, MA, Addison-Wesley, 2000. ISBN 0-201-61635-5\).](#)

[Unicode Inc. \(1998\), Unicode Technical Report #15: Unicode Normalization Forms.](#)

ANSI/IEEE Std 754-1985: IEEE Standard for Binary Floating-Point Arithmetic. Institute of Electrical and Electronic Engineers, New York (1985).

4 Overview

This section contains a non-normative overview of the ECMAScript language.

ECMAScript is an object-oriented programming language for performing computations and manipulating computational objects within a host environment. ECMAScript as defined here is not intended to be computationally self-sufficient; indeed, there are no provisions in this specification for input of external data or output of computed results. Instead, it is expected that the computational environment of an ECMAScript program will provide not only the objects and other facilities described in this specification but also certain environment-specific *host* objects, whose description and behaviour are beyond the scope of this specification except to indicate that they may provide certain properties that can be accessed and certain functions that can be called from an ECMAScript program.

A *scripting language* is a programming language that is used to manipulate, customise, and automate the facilities of an existing system. In such systems, useful functionality is already available through a user interface, and the scripting language is a mechanism for exposing that functionality to program control. In this way, the existing system is said to provide a host environment of objects and facilities, which completes the capabilities of the scripting language. A scripting language is intended for use by both professional and non-professional programmers.

ECMAScript was originally designed to be a *Web scripting language*, providing a mechanism to enliven Web pages in browsers and to perform server computation as part of a Web-based client-server architecture. ECMAScript can provide core scripting capabilities for a variety of host environments, and therefore the core scripting language is specified in this document apart from any particular host environment.

Deleted: 2.1

Deleted: .

Deleted: Unicode Inc. (1996), The Unicode Standard™, Version 2.0. ISBN: 0-201-48345-9, Addison-Wesley Publishing Co., Menlo Park, California.

Deleted: Unicode Inc. (1998), Unicode Technical Report #8: The Unicode Standard™, Version 2.1.¶

Deleted: To accommodate non-professional programmers, some aspects of the language may be somewhat less strict.

Some of the facilities of ECMAScript are similar to those used in other programming languages; in particular Java™, Self, and Scheme as described in:

- Gosling, James, Bill Joy and Guy Steele. The Java™ Language Specification. Addison Wesley Publishing Co., 1996.
- Ungar, David, and Smith, Randall B. Self: The Power of Simplicity. OOPSLA '87 Conference Proceedings, pp. 227–241, Orlando, FL, October 1987.
- [IEEE Standard for the Scheme Programming Language. IEEE Std 1178-1990.](#)

Deleted: and

4.1 Web Scripting

A web browser provides an ECMAScript host environment for client-side computation including, for instance, objects that represent windows, menus, pop-ups, dialog boxes, text areas, anchors, frames, history, cookies, and input/output. Further, the host environment provides a means to attach scripting code to events such as change of focus, page and image loading, unloading, error and abort, selection, form submission, and mouse actions. Scripting code appears within the HTML and the displayed page is a combination of user interface elements and fixed and computed text and images. The scripting code is reactive to user interaction and there is no need for a main program.

A web server provides a different host environment for server-side computation including objects representing requests, clients, and files; and mechanisms to lock and share data. By using browser-side and server-side scripting together, it is possible to distribute computation between the client and server while providing a customised user interface for a Web-based application.

Each Web browser and server that supports ECMAScript supplies its own host environment, completing the ECMAScript execution environment.

4.2 Language Overview

The following is an informal overview of ECMAScript—not all parts of the language are described. This overview is not part of the standard proper.

ECMAScript is object-based: basic language and host facilities are provided by objects, and an ECMAScript program is a cluster of communicating objects. An ECMAScript *object* is a collection of *properties* each with zero or more *attributes* that determine how each property can be used—for example, when the *Writable* attribute for a property is set to *false*, any attempt by executed ECMAScript code to change the value of the property *fails*. Properties are containers that hold other objects, *primitive values*, or *methods*. A primitive value is a member of one of the following built-in types: **Undefined**, **Null**, **Boolean**, **Number**, and **String**; an object is a member of the remaining built-in type **Object**; and a method is a function associated with an object via a property.

Deleted: an unordered

Deleted: ReadOnly

Deleted: true

Deleted: has no effect

ECMAScript defines a collection of *built-in objects* that round out the definition of ECMAScript entities. These built-in objects include the **Global** object, the **Object** object, the **Function** object, the **Array** object, the **String** object, the **Boolean** object, the **Number** object, the **Math** object, the **Date** object, the **RegExp** object, the JSON object, and the Error objects **Error**, **EvalError**, **RangeError**, **ReferenceError**, **SyntaxError**, **TypeError** and **URIError**.

ECMAScript also defines a set of built-in *operators*. ECMAScript operators include various unary operations, multiplicative operators, additive operators, bitwise shift operators, relational operators, equality operators, binary bitwise operators, binary logical operators, assignment operators, and the comma operator.

Deleted: that may not be, strictly speaking, functions or methods

ECMAScript syntax intentionally resembles Java syntax. ECMAScript syntax is relaxed to enable it to serve as an easy-to-use scripting language. For example, a variable is not required to have its type declared nor are types associated with properties, and defined functions are not required to have their declarations appear textually before calls to them.

4.2.1 Objects

ECMAScript does not contain *classes* such as those in C++, Smalltalk, or Java. Instead objects may be created in various ways including via a literal notation or via constructors which create objects by executing code that allocates storage for the objects and initialises all or part of them by assigning initial values to their properties. Each constructor has a *property named "prototype"* that is used to implement *prototype-based inheritance* and *shared properties*. Objects are created by using constructors

Deleted: proper

Deleted: , but rather, supports

Deleted: All constructors are objects, but not all objects are constructors.


Deleted: Prototype property

in **new** expressions; for example, `new Date(2009,11)` creates a new `Date` object. Invoking a constructor without using **new** has consequences that depend on the constructor. For example, `Date()` produces a string representation of the current date and time rather than an object.

ECMAScript supports *prototype-based inheritance*. Every object created by a constructor has an implicit reference (called the *object's prototype*) to the value of its constructor's "prototype" property. Furthermore, a prototype may have a non-null implicit reference to its prototype, and so on; this is called the *prototype chain*. When a reference is made to a property in an object, that reference is to the property of that name in the first object in the prototype chain that contains a property of that name. In other words, first the object mentioned directly is examined for such a property; if that object contains the named property, that is the property to which the reference refers; if that object does not contain the named property, the prototype for that object is examined next; and so on.

In a class-based object-oriented language, in general, state is carried by instances, methods are carried by classes, and inheritance is only of structure and behaviour. In ECMAScript, the state and methods are carried by objects, and structure, behaviour, and state are all inherited.

All objects that do not directly contain a particular property that their prototype contains share that property and its value. The following diagram illustrates this:

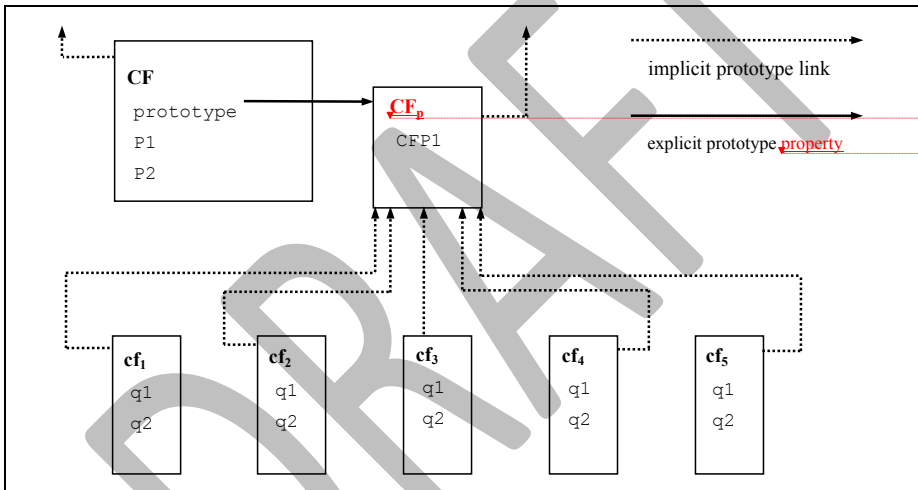

CF is a constructor (and also an object). Five objects have been created by using **new** expressions: `cf1`, `cf2`, `cf3`, `cf4`, and `cf5`. Each of these objects contains properties named `q1` and `q2`. The dashed lines represent the implicit prototype relationship; so, for example, `cf3`'s prototype is `CFp`. The constructor, `CF`, has two properties itself, named `P1` and `P2`, which are not visible to `CFp`, `cf1`, `cf2`, `cf3`, `cf4`, or `cf5`. The property named `CFP1` in `CFp` is shared by `cf1`, `cf2`, `cf3`, `cf4`, and `cf5` (but not by `CF`), as are any properties found in `CFp`'s implicit prototype chain that are not named `q1`, `q2`, or `CFP1`. Notice that there is no implicit prototype link between `CF` and `CFp`.

Unlike class-based object languages, properties can be added to objects dynamically by assigning values to them. That is, constructors are not required to name or assign values to all or any of the constructed object's properties. In the above diagram, one could add a new shared property for `cf1`, `cf2`, `cf3`, `cf4`, and `cf5` by assigning a new value to the property in `CFp`.

4.2.2 The Strict Variant of ECMAScript

The ECMAScript Language recognizes the possibility that some users of the language may wish to restrict their usage of some features available in the language. They might do so in the interests of security, to avoid what they consider to be error prone features, to get enhanced error checking, or for other reasons of their choosing. In support of this possibility, ECMAScript defines a strict variant of the language. The strict variant of the language excludes some specific syntactic and semantic features of the regular ECMAScript language and modifies the detailed semantics of some features. The strict variant

- Deleted: String
- Deleted: "A String"
- Deleted: String
- Deleted: String
- Deleted: "A String"
- Deleted: primitive
- Deleted: , not
- Deleted: constructor has an associated prototype, and every
- Deleted: that
- Deleted: to the prototype
- Deleted: associated with its constructor

- Deleted: CFp
- Deleted: link

- Deleted: non-strict

also specifies additional error conditions that must be reported by throwing error exceptions in situations that are not specified as errors by the non-strict form of the language.

The strict variant of ECMAScript is commonly referred to as the *strict mode* of the language. Strict mode selection and use of the strict mode syntax and semantics of ECMAScript is explicitly made at the level of individual ECMAScript code units. Because strict mode is selected at the level of a syntactic code unit, strict mode only imposes restrictions that have local effect within such a code unit. Strict mode does not restrict or modify any aspect of the ECMAScript semantics that must operate consistently across multiple code units. A complete ECMAScript program may be composed for both strict mode and non-strict mode ECMAScript code units. In this case, strict mode only applies when actually executing code that is defined within a strict mode code unit.

In order to conform to this specification, an ECMAScript implementation must implement both the full unrestricted ECMAScript language and the strict mode variant of the ECMAScript language as defined by this specification. In addition, an implementation must support the combination of unrestricted and strict mode code units into a single composite program.

4.3 Definitions

The following are informal definitions of key terms associated with ECMAScript.

4.3.1 Type

A *type* is a set of data values [as defined in section 8 of this specification](#).

4.3.2 Primitive Value

A *primitive value* is a member of one of the types **Undefined**, **Null**, **Boolean**, **Number**, or **String**. A primitive value is a datum that is represented directly at the lowest level of the language implementation.

4.3.3 Object

An *object* is a member of the type **Object**. ~~It is a collection of properties.~~

4.3.4 Constructor

A *constructor* is a Function object that creates and initialises objects. ~~The value of a constructor's "prototype" property is a~~ prototype object that is used to implement inheritance and shared properties.

4.3.5 Prototype

A *prototype* is an object used to implement structure, state, and behaviour inheritance in ECMAScript. When a constructor creates an object, that object implicitly references the constructor's ~~"prototype" property~~, for the purpose of resolving property references. The constructor's ~~"prototype" property~~ can be referenced by the program expression `constructor.prototype`, and properties added to an object's prototype are shared, through inheritance, by all objects sharing the prototype. [Alternatively, a new object may be created with an explicitly specified prototype by using the `Object.create` built-in function.](#)

4.3.6 Native Object

A *native object* is any object supplied by an ECMAScript implementation independent of the host environment. Standard native objects are defined in this specification. Some native objects are built-in; others may be constructed during the course of execution of an ECMAScript program.

4.3.7 Built-in Object

A *built-in object* is any object supplied by an ECMAScript implementation, independent of the host environment, which is present at the start of the execution of an ECMAScript program. Standard built-in objects are defined in this specification, and an ECMAScript implementation may specify and define others. Every built-in object is a native object. ~~A built-in constructor is a built-in object that is also a constructor.~~

4.3.8 Host Object

A *host object* is any object supplied by the host environment to complete the execution environment of ECMAScript. Any object that is not native is a host object.

Deleted: It is an unordered collection of properties each of which contains a primitive value, object, or function. A function stored in a property of an object is called a method.

Deleted: Each constructor has an associated

Deleted: associated prototype

Deleted: associated prototype

4.3.9 Undefined Value

The *undefined value* is a primitive value used when a variable has not been assigned a value.

4.3.10 Undefined Type

The type **Undefined** has exactly one value, called **undefined**.

4.3.11 Null Value

The *null value* is a primitive value that represents the null, empty, or non-existent reference.

4.3.12 Null Type

The type **Null** has exactly one value, called **null**.

4.3.13 Boolean Value

A *boolean value* is a primitive value that is a member of the type **Boolean** and is one of two unique values, **true** and **false**.

4.3.14 Boolean Type

The type **Boolean** represents a logical entity and consists of exactly two unique values. One is called **true** and the other is called **false**.

4.3.15 Boolean Object

A *Boolean object* is a member of the type **Object** and is an instance of the built-in Boolean object. That is, a Boolean object is created by using the Boolean constructor in a **new** expression, supplying a boolean as an argument. The resulting object has an implicit (unnamed) property that is the boolean. A Boolean object can be coerced to a boolean value.

4.3.16 String Value

A *string value* is a primitive value that is a member of the type **String** and is a finite ordered sequence of zero or more 16-bit unsigned integer values.

NOTE

Although each value usually represents a single 16-bit unit of UTF-16 text, the language does not place any restrictions or requirements on the values except that they be 16-bit unsigned integers.

4.3.17 String Type

The type **String** is the set of all string values.

4.3.18 String Object

A *String object* is a member of the type **Object** and is an instance of the built-in String object. That is, a String object is created by using the String constructor in a **new** expression, supplying a string as an argument. The resulting object has an implicit (unnamed) property that is the string. A String object can be coerced to a string value by calling the String constructor as a function (15.5.1).

4.3.19 Number Value

A *number value* is a primitive value that is a member of the type **Number** and is a direct representation of a number.

4.3.20 Number Type

The type **Number** is a set of primitive values representing numbers. In ECMAScript, the set of values represents the double-precision 64-bit format IEEE 754 values including the special “Not-a-Number” (NaN) values, positive infinity, and negative infinity.

4.3.21 Number Object

A *Number object* is a member of the type **Object** and is an instance of the built-in Number object. That is, a Number object is created by using the Number constructor in a **new** expression, supplying a number as an argument. The resulting object has an implicit (unnamed) property that is the number. A Number object can be coerced to a number value by calling the Number constructor as a function (15.7.1).

4.3.22 Infinity

The primitive value **Infinity** represents the positive infinite number value. This value is a member of the Number type.

4.3.23 NaN

The primitive value **NaN** represents the set of IEEE [754](#) “Not-a-Number” values. This value is a member of the Number type.

Deleted: Standard

4.3.24 Function

A **function** is a member of the type **Object** that may be invoked as a subroutine. In addition to its named properties, a function contains executable code and state that determine how it behaves when invoked. A function’s code may or may not be written in ECMAScript.

4.3.25 Built-in Function

A built-in function is a **native** function that is a built-in object of the language, such as **parseInt** and **Math.exp**. An implementation may also provide implementation-dependent built-in functions that are not described in this specification.

4.3.26 Property

A **property** is an association between a name and a value that is part of an object. Depending upon the form of the property the value may be represented either directly as a data value (a primitive value, an object, or a function) or indirectly by a pair of accessor functions.

4.3.27 Method

A **method** is a function that is the value of a property.

4.3.28 Attribute

An **attribute** is an internal value that defines some characteristic of a property.

4.3.29 Own Property

An own property of an object is a property that is directly present on that object.

4.3.30 Inherited Property

An **inherited property** is a property of an object that is not one of its own properties but is a property (either own or inherited) of the object’s prototype.

4.3.31 Built-in Method

A **built-in method** is any method that is a built-in function. Standard built-in methods are defined in this specification, and an ECMAScript implementation may specify and define others. A built-in method is a Built-in function.

5 Notational Conventions

5.1 Syntactic and Lexical Grammars

This section describes the context-free grammars used in this specification to define the lexical and syntactic structure of an ECMAScript program.

5.1.1 Context-Free Grammars

A *context-free grammar* consists of a number of *productions*. Each production has an abstract symbol called a *nonterminal* as its *left-hand side*, and a sequence of zero or more nonterminal and *terminal* symbols as its *right-hand side*. For each grammar, the terminal symbols are drawn from a specified alphabet.

Starting from a sentence consisting of a single distinguished nonterminal, called the *goal symbol*, a given context-free grammar specifies a *language*, namely, the (perhaps infinite) set of possible sequences of terminal symbols that can result from repeatedly replacing any nonterminal in the sequence with a right-hand side of a production for which the nonterminal is the left-hand side.

5.1.2 The Lexical and RegExp Grammars

A *lexical grammar* for ECMAScript is given in clause 7. This grammar has as its terminal symbols the characters of the Unicode character set. It defines a set of productions, starting from the goal symbol *InputElementDiv* or *InputElementRegExp*, that describe how sequences of Unicode characters are translated into a sequence of input elements.

Input elements other than white space and comments form the terminal symbols for the syntactic grammar for ECMAScript and are called ECMAScript *tokens*. These tokens are the reserved words, identifiers, literals, and punctuators of the ECMAScript language. Moreover, line terminators, although not considered to be tokens, also become part of the stream of input elements and guide the process of automatic semicolon insertion (7.9). Simple white space and single-line comments are discarded and do not appear in the stream of input elements for the syntactic grammar. A *MultiLineComment* (that is, a comment of the form “*/*...*/*” regardless of whether it spans more than one line) is likewise simply discarded if it contains no line terminator; but if a *MultiLineComment* contains one or more line terminators, then it is replaced by a single line terminator, which becomes part of the stream of input elements for the syntactic grammar.

A *RegExp grammar* for ECMAScript is given in 15.10. This grammar also has as its terminal symbols the characters of the Unicode character set. It defines a set of productions, starting from the goal symbol *Pattern*, that describe how sequences of Unicode characters are translated into regular expression patterns.

Productions of the lexical and RegExp grammars are distinguished by having two colons “*::*” as separating punctuation. The lexical and RegExp grammars share some productions.

5.1.3 The Numeric String Grammar

A second grammar is used for translating strings into numeric values. This grammar is similar to the part of the lexical grammar having to do with numeric literals and has as its terminal symbols the characters of the Unicode character set. This grammar appears in 9.3.1.

Productions of the numeric string grammar are distinguished by having three colons “*:::*” as punctuation.

5.1.4 The Syntactic Grammar

The *syntactic grammar* for ECMAScript is given in clauses 11, 12, 13 and 14. This grammar has ECMAScript tokens defined by the lexical grammar as its terminal symbols (5.1.2). It defines a set of productions, starting from the goal symbol *Program*, that describe how sequences of tokens can form syntactically correct ECMAScript programs.

When a stream of Unicode characters is to be parsed as an ECMAScript program, it is first converted to a stream of input elements by repeated application of the lexical grammar; this stream of input elements is then parsed by a single application of the syntax grammar. The program is syntactically in error if the tokens in the stream of input elements cannot be parsed as a single instance of the goal nonterminal *Program*, with no tokens left over.

Deleted: 7.8.5

Productions of the syntactic grammar are distinguished by having just one colon “:” as punctuation.

The syntactic grammar as presented in sections 11, 12, 13 and 14 is actually not a complete account of which token sequences are accepted as correct ECMAScript programs. Certain additional token sequences are also accepted, namely, those that would be described by the grammar if only semicolons were added to the sequence in certain places (such as before line terminator characters). Furthermore, certain token sequences that are described by the grammar are not considered acceptable if a terminator character appears in certain “awkward” places.

Deleted: 0, 0, 0 and 0

5.1.5 The Use Strict Directive Grammar

The Use Strict Directive grammar is given in 14.1. This grammar is similar to the syntactic grammar in that it has ECMAScript tokens defined by the lexical grammar as its terminal symbols (5.1.2).

Productions of the Use Strict Directive grammar are distinguished by having just one colon “:” as separating punctuation. The Use Strict Directive grammar is only used in 14.1 and shares no productions with the ECMAScript syntactic grammar.

5.1.6 The JSON Grammar

The JSON grammar is used to translate a string describing a set of ECMAScript objects into actual objects. The JSON grammar is given in 15.12.1.

The JSON grammar consists of the JSON lexical grammar and the JSON syntactic grammar. The JSON lexical grammar is used to translate Unicode character sequences into token and is similar to parts of the ECMAScript lexical grammar. The JSON syntactic grammar describes how sequences of tokens from the JSON lexical grammar can form syntactically correct JSON object descriptions.

Productions of the JSON lexical grammar are distinguished by having two colons “:” as separating punctuation. The JSON lexical grammar uses some productions from the ECMAScript lexical grammar. The JSON syntactic grammar is similar to parts of the ECMAScript syntactic grammar. Productions of the JSON syntactic grammar are distinguished by using one colon “:” as separating punctuation.

5.1.7 Grammar Notation

Terminal symbols of the lexical and string grammars, and some of the terminal symbols of the syntactic grammar, are shown in **fixed width** font, both in the productions of the grammars and throughout this specification whenever the text directly refers to such a terminal symbol. These are to appear in a program exactly as written. All nonterminal characters specified in this way are to be understood as the appropriate Unicode character from the ASCII range, as opposed to any similar-looking characters from other Unicode ranges.

Deleted: 5

Nonterminal symbols are shown in *italic* type. The definition of a nonterminal is introduced by the name of the nonterminal being defined followed by one or more colons. (The number of colons indicates to which grammar the production belongs.) One or more alternative right-hand sides for the nonterminal then follow on succeeding lines. For example, the syntactic definition:

WhileStatement :

while (*Expression*) *Statement*

Deleted: WithStatement

Deleted: with

states that the nonterminal *WhileStatement* represents the token **while**, followed by a left parenthesis token, followed by an *Expression*, followed by a right parenthesis token, followed by a *Statement*. The occurrences of *Expression* and *Statement* are themselves nonterminals. As another example, the syntactic definition:

Deleted: WithStatement

Deleted: with

ArgumentList :

AssignmentExpression

ArgumentList , *AssignmentExpression*

states that an *ArgumentList* may represent either a single *AssignmentExpression* or an *ArgumentList*, followed by a comma, followed by an *AssignmentExpression*. This definition of *ArgumentList* is *recursive*, that is, it is defined in terms of itself. The result is that an *ArgumentList* may contain any positive number of arguments, separated by commas, where each argument expression is an *AssignmentExpression*. Such recursive definitions of nonterminals are common.

The subscripted suffix “*opt*”, which may appear after a terminal or nonterminal, indicates an *optional symbol*. The alternative containing the optional symbol actually specifies two right-hand sides, one that omits the optional element and one that includes it. This means that:

VariableDeclaration :
Identifier Initialiser_{opt}

is a convenient abbreviation for:

VariableDeclaration :
Identifier
Identifier Initialiser

and that:

IterationStatement :
for (ExpressionNoIn_{opt} ; Expression_{opt} ; Expression_{opt}) Statement

is a convenient abbreviation for:

IterationStatement :
for (; Expression_{opt} ; Expression_{opt}) Statement
for (ExpressionNoIn ; Expression_{opt} ; Expression_{opt}) Statement

which in turn is an abbreviation for:

IterationStatement :
for (; ; Expression_{opt}) Statement
for (; Expression ; Expression_{opt}) Statement
for (ExpressionNoIn ; ; Expression_{opt}) Statement
for (ExpressionNoIn ; Expression ; Expression_{opt}) Statement

which in turn is an abbreviation for:

IterationStatement :
for (; ;) Statement
for (; ; Expression) Statement
for (; Expression ;) Statement
for (; Expression ; Expression) Statement
for (ExpressionNoIn ; ;) Statement
for (ExpressionNoIn ; ; Expression) Statement
for (ExpressionNoIn ; Expression ;) Statement
for (ExpressionNoIn ; Expression ; Expression) Statement

so the nonterminal *IterationStatement* actually has eight alternative right-hand sides.

If the phrase “[empty]” appears as the right-hand side of a production, it indicates that the production's right-hand side contains no terminals or nonterminals.

If the phrase “[lookahead \notin set]” appears in the right-hand side of a production, it indicates that the production may not be used if the immediately following input terminal is a member of the given *set*. The *set* can be written as a list of terminals enclosed in curly braces. For convenience, the set can also be written as a nonterminal, in which case it represents the set of all terminals to which that nonterminal could expand. For example, given the definitions

DecimalDigit :: one of
0 1 2 3 4 5 6 7 8 9

DecimalDigits ::
DecimalDigit
DecimalDigits DecimalDigit

the definition

LookaheadExample ::

n [lookahead \notin {1, 3, 5, 7, 9}] *DecimalDigits*
DecimalDigit [lookahead \notin *DecimalDigit*]

matches either the letter **n** followed by one or more decimal digits the first of which is even, or a decimal digit not followed by another decimal digit.

If the phrase “[no *LineTerminator* here]” appears in the right-hand side of a production of the syntactic grammar, it indicates that the production is a *restricted production*: it may not be used if a *LineTerminator* occurs in the input stream at the indicated position. For example, the production:

ReturnStatement :

return [no *LineTerminator* here] *Expression*_{opt} ;

indicates that the production may not be used if a *LineTerminator* occurs in the program between the **return** token and the *Expression*.

Unless the presence of a *LineTerminator* is forbidden by a restricted production, any number of occurrences of *LineTerminator* may appear between any two consecutive tokens in the stream of input elements without affecting the syntactic acceptability of the program.

When the words “**one of**” follow the colon(s) in a grammar definition, they signify that each of the terminal symbols on the following line or lines is an alternative definition. For example, the lexical grammar for ECMAScript contains the production:

NonZeroDigit :: **one of**
1 2 3 4 5 6 7 8 9

which is merely a convenient abbreviation for:

NonZeroDigit ::
1
2
3
4
5
6
7
8
9

Deleted: one of

When an alternative in a production of the lexical grammar or the numeric string grammar appears to be a multi-character token, it represents the sequence of characters that would make up such a token.

The right-hand side of a production may specify that certain expansions are not permitted by using the phrase “**but not**” and then indicating the expansions to be excluded. For example, the production:

Identifier ::

IdentifierName but **not** *ReservedWord*

means that the nonterminal *Identifier* may be replaced by any sequence of characters that could replace *IdentifierName* provided that the same sequence of characters could not replace *ReservedWord*.

Finally, a few nonterminal symbols are described by a descriptive phrase in roman type in cases where it would be impractical to list all the alternatives:

SourceCharacter ::

any Unicode character

5.2 Algorithm Conventions

The specification often uses a numbered list to specify steps in an algorithm. These algorithms are used to precisely specify the required semantics of ECMAScript language constructs. The algorithms are not

Deleted: clarify

intended to imply the use of any specific implementation technique. In practice, there may be more efficient algorithms available to implement a given feature.

In order to facilitate their use in multiple parts of this specification some algorithms, called *abstract operations*, are named and written in parameterized functional form so that they may be referenced by name from within other algorithms.

When an algorithm is to produce a value as a result, the directive “return x ” is used to indicate that the result of the algorithm is the value of x and that the algorithm should terminate. The notation $\text{Result}(n)$ is used as shorthand for “the result of step n ”. $\text{Type}(x)$ is used as shorthand for “the type of x ”.

For clarity of expression, algorithm steps may be subdivided into sequential substeps. Substeps are indented and may themselves be further divided into indented substeps. Outline numbering conventions are used to identify substeps with the first level of substeps labeled with lower case alphabetic characters and the second level of substeps labeled with lower case roman numerals. If more than three levels are required these rules repeat with the fourth level using numeric labels. For example:

- 1. Top-level step
 - a. Substep
 - b. Substep
 - i. Subsubstep
 - 1. Subsubsubstep
 - a. Subsubsubsubstep

A step or substep may be written as a predicate that conditions its substeps. In this case, the substeps are only applied if the predicate is true. If a step or substep begins with the word “else” it is a predicate that is the negation of the preceding predicate step at the same level.

A step may specify the iterative application of its substeps.

Mathematical operations such as addition, subtraction, negation, multiplication, division, and the mathematical functions defined later in this section should always be understood as computing exact mathematical results on mathematical real numbers, which do not include infinities and do not include a negative zero that is distinguished from positive zero. Algorithms in this standard that model floating-point arithmetic include explicit steps, where necessary, to handle infinities and signed zero and to perform rounding. If a mathematical operation or function is applied to a floating-point number, it should be understood as being applied to the exact mathematical value represented by that floating-point number; such a floating-point number must be finite, and if it is $+0$ or -0 then the corresponding mathematical value is simply 0.

The mathematical function $\text{abs}(x)$ yields the absolute value of x , which is $-x$ if x is negative (less than zero) and otherwise is x itself.

The mathematical function $\text{sign}(x)$ yields 1 if x is positive and -1 if x is negative. The sign function is not used in this standard for cases when x is zero.

The notation “ x modulo y ” (y must be finite and nonzero) computes a value k of the same sign as y (or zero) such that $\text{abs}(k) < \text{abs}(y)$ and $x - k = q \times y$ for some integer q .

The mathematical function $\text{floor}(x)$ yields the largest integer (closest to positive infinity) that is not larger than x .

NOTE

$\text{floor}(x) = x - (x \text{ modulo } 1)$.

If an algorithm is defined to “throw an exception”, execution of the algorithm is terminated and no result is returned. The calling algorithms are also terminated, until an algorithm step is reached that explicitly deals with the exception, using terminology such as “If an exception was thrown...”. Once such an algorithm step has been encountered the exception is no longer considered to have occurred.

6 Source Text

ECMAScript source text is represented as a sequence of characters in the Unicode character encoding, version 3.0 or later, using the UTF-16 transformation format. The text is expected to have been normalised to Unicode Normalised Form C (canonical composition), as described in Unicode Technical Report #15. Conforming ECMAScript implementations are not required to perform any normalisation of text, or behave as though they were performing normalisation of text, themselves.

SourceCharacter ::
any Unicode character

Throughout the rest of this document, the phrase “code unit” and the word “character” will be used to refer to a 16-bit unsigned value used to represent a single 16-bit unit of UTF-16 text. The phrase “Unicode character” will be used to refer to the abstract linguistic or typographical unit represented by a single Unicode scalar value (which may be longer than 16 bits and thus may be represented by more than one code unit). This only refers to entities represented by single Unicode scalar values: the components of a combining character sequence are still individual “Unicode characters,” even though a user might think of the whole sequence as a single character.

In string literals, regular expression literals and identifiers, any character (code unit) may also be expressed as a Unicode escape sequence consisting of six characters, namely `\u` plus four hexadecimal digits. Within a comment, such an escape sequence is effectively ignored as part of the comment. Within a string literal or regular expression literal, the Unicode escape sequence contributes one character to the value of the literal. Within an identifier, the escape sequence contributes one character to the identifier.

NOTE 1

Although this document sometimes refers to a “transformation” between a “character” within a “string” and the 16-bit unsigned integer that is the UTF-16 encoding of that character, there is actually no transformation because a “character” within a “string” is actually represented using that 16-bit unsigned value.

NOTE 2

ECMAScript differs from the Java programming language in the behaviour of Unicode escape sequences. In a Java program, if the Unicode escape sequence `\u000A`, for example, occurs within a single-line comment, it is interpreted as a line terminator (Unicode character `000A` is line feed) and therefore the next character is not part of the comment. Similarly, if the Unicode escape sequence `\u000A` occurs within a string literal in a Java program, it is likewise interpreted as a line terminator, which is not allowed within a string literal—one must write `\n` instead of `\u000A` to cause a line feed to be part of the string value of a string literal. In an ECMAScript program, a Unicode escape sequence occurring within a comment is never interpreted and therefore cannot contribute to termination of the comment. Similarly, a Unicode escape sequence occurring within a string literal in an ECMAScript program always contributes a character to the string value of the literal and is never interpreted as a line terminator or as a quote mark that might terminate the string literal.

7 Lexical Conventions

The source text of an ECMAScript program is first converted into a sequence of input elements, which are either tokens, line terminators, comments, or white space. The source text is scanned from left to right, repeatedly taking the longest possible sequence of characters as the next input element.

There are two goal symbols for the lexical grammar. The *InputElementDiv* symbol is used in those syntactic grammar contexts where a division (`/`) or division-assignment (`/=`) operator is permitted. The *InputElementRegExp* symbol is used in other syntactic grammar contexts.

Note that contexts exist in the syntactic grammar where both a division and a *RegularExpressionLiteral* are permitted by the syntactic grammar; however, since the lexical grammar uses the *InputElementDiv* goal symbol in such cases, the opening slash is not recognised as starting a regular expression literal in such a context. As a workaround, one may enclose the regular expression literal in parentheses.

Syntax

Deleted: .

Deleted: 2.1

Deleted: ECMAScript source text can contain any of the Unicode characters. All Unicode white space characters are treated as white space, and all Unicode line/paragraph separators are treated as line separators. Non-Latin Unicode characters are allowed in identifiers, string literals, regular expression literals and comments.¶

Deleted: code point

Deleted: code point

Deleted: code point


```

InputElementDiv ::
  WhiteSpace
  LineTerminator
  Comment
  Token
  DivPunctuator

```

```

InputElementRegExp ::
  WhiteSpace
  LineTerminator
  Comment
  Token
  RegularExpressionLiteral

```

7.1 Unicode Format-Control Characters

The Unicode format-control characters (i.e., the characters in category “Cf” in the Unicode Character Database such as LEFT-TO-RIGHT MARK or RIGHT-TO-LEFT MARK) are control codes used to control the formatting of a range of text in the absence of higher-level protocols for this (such as mark-up languages). It is useful to allow these in source text to facilitate editing and display.

The format control characters may be used in identifiers, within comments, and within string literals and regular expression literals.

7.2 White Space

White space characters are used to improve source text readability and to separate tokens (indivisible lexical units) from each other, but are otherwise insignificant. White space may occur between any two tokens, and may occur within strings (where they are considered significant characters forming part of the literal string value), but cannot appear within any other kind of token.

The following characters are considered to be white space:

<u>Code Unit Value</u>	<u>Name</u>	<u>Formal Name</u>
<u>\u0009</u>	Tab	<TAB>
<u>\u000B</u>	Vertical Tab	<VT>
<u>\u000C</u>	Form Feed	<FF>
<u>\u0020</u>	Space	<SP>
<u>\u0085</u>	<u>Next Line</u>	<u><NEL></u>
<u>\u00A0</u>	No-break space	<NBSP>
<u>\u200B</u>	<u>Zero width space</u>	<u><ZWSP></u>
<u>\uFEFF</u>	<u>Byte Order Mark</u>	<u><BOM></u>
Other category “Zs”	Any other Unicode “space separator”	<USP>

ECMAScript implementations must recognize all of the white space characters defined in Unicode 3.0. Later editions of the Unicode Standard may define other white space characters. ECMAScript implementations may recognize white space characters from later editions of the Unicode Standard.

Syntax

```

WhiteSpace ::
  <TAB>
  <VT>
  <FF>
  <SP>
  <NEL>

```

Deleted: can occur

Deleted: anywhere in the source text of an ECMAScript program. These characters are removed from the source text before applying the lexical grammar. Since these characters are removed before processing string and regular expression literals, one must use a Unicode escape sequence (see 7.6) to include a Unicode format-control character inside a string or regular expression literal

Deleted: Code Point

<NBSP>
<ZWSP>
<BOM>
<USP>

7.3 Line Terminators

Like white space characters, line terminator characters are used to improve source text readability and to separate tokens (indivisible lexical units) from each other. However, unlike white space characters, line terminators have some influence over the behaviour of the syntactic grammar. In general, line terminators may occur between any two tokens, but there are a few places where they are forbidden by the syntactic grammar. A line terminator cannot occur within any token, except that line terminators that are preceded by an escape sequence may occur within a string literal token. Line terminators also affect the process of automatic semicolon insertion (7.9).

Line terminators are included in the set of white space characters that are matched by the \s class in regular expressions.

The following characters are considered to be line terminators:

<i>Code Unit Value</i>	<i>Name</i>	<i>Formal Name</i>
\u000A	Line Feed	<LF>
\u000D	Carriage Return	<CR>
\u2028	Line separator	<LS>
\u2029	Paragraph separator	<PS>

Only the characters in the above table are treated as line terminators. Other new line or line breaking characters are treated as white space but not as line terminators. The character sequence <CR><LF> is commonly used as a line terminator. It should be considered a single character for the purpose of reporting line numbers.

Deleted: not even a string

Deleted: 7.8.5

Deleted: Code Point

Syntax

LineTerminator ::

<LF>
<CR>
<LS>
<PS>

LineTerminatorSequence ::

<LF>
<CR> [lookahead ≠ <LF>]
<LS>
<PS>
<CR> <LF>

7.4 Comments

Description

Comments can be either single or multi-line. Multi-line comments cannot nest.

Because a single-line comment can contain any character except a *LineTerminator* character, and because of the general rule that a token is always as long as possible, a single-line comment always consists of all characters from the // marker to the end of the line. However, the *LineTerminator* at the end of the line is not considered to be part of the single-line comment; it is recognised separately by the lexical grammar and becomes part of the stream of input elements for the syntactic grammar. This point is very important, because it implies that the presence or absence of single-line comments does not affect the process of automatic semicolon insertion (7.9).

Comments behave like white space and are discarded except that, if a *MultiLineComment* contains a line terminator character, then the entire comment is considered to be a *LineTerminator* for purposes of parsing by the syntactic grammar.

Syntax

Comment ::
MultiLineComment
SingleLineComment

MultiLineComment ::
/ MultiLineCommentChars_{opt} */*

MultiLineCommentChars ::
MultiLineNotAsteriskChar MultiLineCommentChars_{opt}
** PostAsteriskCommentChars_{opt}*

PostAsteriskCommentChars ::
MultiLineNotForwardSlashOrAsteriskChar MultiLineCommentChars_{opt}
** PostAsteriskCommentChars_{opt}*

MultiLineNotAsteriskChar ::
SourceCharacter **but not** *asterisk* *****

MultiLineNotForwardSlashOrAsteriskChar ::
SourceCharacter **but not** *forward-slash /* **or** *asterisk* *****

SingleLineComment ::
// SingleLineCommentChars_{opt}

SingleLineCommentChars ::
SingleLineCommentChar SingleLineCommentChars_{opt}

SingleLineCommentChar ::
SourceCharacter **but not** *LineTerminator*

7.5 Tokens

Syntax

Token ::
IdentifierName
Punctuator
NumericLiteral
StringLiteral

Deleted: *ReservedWord*
Identifier

7.5.1 Reserved Words

Description

Reserved words cannot be used as identifiers.

Syntax

ReservedWord ::
Keyword
FutureReservedWord
NullLiteral
BooleanLiteral

7.5.2 Keywords

The following tokens are ECMAScript keywords and may not be used as identifiers in ECMAScript programs.

Syntax

Keyword :: one of

<u>break</u>	<u>do</u>	<u>instanceof</u>	<u>typeof</u>
case	<u>else</u>	<u>new</u>	<u>var</u>
catch	<u>finally</u>	<u>return</u>	<u>void</u>
continue	<u>for</u>	<u>switch</u>	<u>while</u>
<u>debugger</u>	<u>function</u>	<u>this</u>	<u>with</u>
<u>default</u>	<u>if</u>	<u>throw</u>	
<u>delete</u>	<u>in</u>	<u>try</u>	

7.5.3 Future Reserved Words

The following words are used as keywords in proposed extensions and are therefore reserved to allow for the possibility of future adoption of those extensions.

Syntax

FutureReservedWord :: one of

<u>abstract</u>	<u>export</u>	<u>interface</u>	<u>static</u>
boolean	<u>extends</u>	<u>long</u>	<u>super</u>
byte	<u>final</u>	<u>native</u>	<u>synchronized</u>
char	<u>float</u>	<u>package</u>	<u>throws</u>
class	<u>goto</u>	<u>private</u>	<u>transient</u>
const	<u>implements</u>	<u>protected</u>	<u>volatile</u>
<u>double</u>	<u>import</u>	<u>public</u>	
<u>enum</u>	<u>int</u>	<u>short</u>	

Note

The identifiers 'const', 'let', and 'yield' may be used in a future version of this standard.

7.6 Identifiers

Description

Identifiers are interpreted according to the grammar given in Section 5.16 of the Unicode standard, with some small modifications. This grammar is based on both normative and informative character categories specified by the Unicode Standard. The characters in the specified categories in version 3.0 of the Unicode standard must be treated as in those categories by all conforming ECMAScript implementations.

This standard specifies **specific character additions**: The dollar sign (\$) and the underscore () are permitted anywhere in an identifier.

Unicode escape sequences are also permitted in identifiers, where they contribute a single character to the identifier, as computed by the CV of the *UnicodeEscapeSequence* (see 7.8.4). The \ preceding the *UnicodeEscapeSequence* does not contribute a character to the identifier. A *UnicodeEscapeSequence* cannot be used to put a character into an identifier that would otherwise be illegal. In other words, if a \ *UnicodeEscapeSequence* sequence were replaced by its *UnicodeEscapeSequence*'s CV, the result must still be a valid *Identifier* that has the exact same sequence of characters as the original *Identifier*.

Two identifiers that are canonically equivalent according to the Unicode standard are *not* equal unless they are represented by the exact same sequence of **code units** (in other words, conforming ECMAScript implementations are only required to do bitwise comparison on identifiers). The intent is that the incoming source text has been converted to normalised form C before it reaches the compiler.

ECMAScript implementations may recognize identifier characters defined in later editions of the Unicode Standard. If portability is a concern, programmers should only employ identifier characters defined in Unicode 3.0.

Syntax

Identifier ::

IdentifierName **but not** *ReservedWord*

- Deleted: Break
- Deleted: else
- Deleted: new
- Deleted: var
- Deleted: finally
- Deleted: return
- Deleted: void
- Deleted: for
- Deleted: switch
- Deleted: while
- Deleted: function
- Deleted: this
- Deleted: with
- Deleted: default
- Deleted: if
- Deleted: throw
- Deleted: debugger
- Deleted: delete
- Deleted: in
- Deleted: try
- Deleted: do
- Deleted: instanceof
- Deleted: typeof
- Deleted: enum
- Deleted: int
- Deleted: short
- Deleted: export
- Deleted: interface
- Deleted: static
- Deleted: extends
- Deleted: long
- Deleted: super
- Deleted: final
- Deleted: native
- Deleted: synchronized
- Deleted: float
- Deleted: package
- Deleted: throws
- Deleted: goto
- Deleted: private
- Deleted: transient
- Deleted: debugger
- Deleted: implements
- Deleted: protected
- Deleted: volatile
- Deleted: double
- Deleted: import
- Deleted: public
- Deleted: are likely to
- Deleted: upcoming version 3.0 of the ...nicode ...
- Deleted: one departure from the grammar given in ...
- Deleted: code point

IdentifierName ::
 IdentifierStart
 IdentifierName *IdentifierPart*

IdentifierStart ::
 UnicodeLetter
 \$
 \ UnicodeEscapeSequence

IdentifierPart ::
 IdentifierStart
 UnicodeCombiningMark
 UnicodeDigit
 UnicodeConnectorPunctuation
 \ UnicodeEscapeSequence

UnicodeLetter
any character in the Unicode categories “Uppercase letter (Lu)”, “Lowercase letter (Ll)”, “Titlecase letter (Lt)”, “Modifier letter (Lm)”, “Other letter (Lo)”, or “Letter number (Nl)”.

UnicodeCombiningMark
any character in the Unicode categories “Non-spacing mark (Mn)” or “Combining spacing mark (Mc)”

UnicodeDigit
any character in the Unicode category “Decimal number (Nd)”

UnicodeConnectorPunctuation
any character in the Unicode category “Connector punctuation (Pc)”

UnicodeEscapeSequence
see 7.8.4.

HexDigit :: one of
0 1 2 3 4 5 6 7 8 9 a b c d e f A B C D E F

7.7 Punctuators

Syntax

Punctuator :: one of
{ } () []
. ; , < > <=
>= == != === !==
+ - * % ++ --
<< >> >>> & | ^
! ~ && || ? :
= += -= *= %= <<=
>>= >>>= &= |= ^=

DivPunctuator :: one of
/ /=

7.8 Literals

Syntax

Literal ::
 NullLiteral
 BooleanLiteral
 NumericLiteral
 StringLiteral

7.8.1 Null Literals

Syntax

NullLiteral ::
 null

Semantics

The value of the null literal **null** is the sole value of the Null type, namely **null**.

7.8.2 Boolean Literals

Syntax

BooleanLiteral ::
 true
 false

Semantics

The value of the Boolean literal **true** is a value of the Boolean type, namely **true**.

The value of the Boolean literal **false** is a value of the Boolean type, namely **false**.

7.8.3 Numeric Literals

Syntax

NumericLiteral ::
 DecimalLiteral
 HexIntegerLiteral

DecimalLiteral ::
 DecimalIntegerLiteral . *DecimalDigits*_{opt} *ExponentPart*_{opt}
 . *DecimalDigits* *ExponentPart*_{opt}
 DecimalIntegerLiteral *ExponentPart*_{opt}

DecimalIntegerLiteral ::
 0
 NonZeroDigit *DecimalDigits*_{opt}

DecimalDigits ::
 DecimalDigit
 DecimalDigits *DecimalDigit*

DecimalDigit :: one of
 0 1 2 3 4 5 6 7 8 9

NonZeroDigit :: one of
 1 2 3 4 5 6 7 8 9

ExponentPart ::
 ExponentIndicator *SignedInteger*

ExponentIndicator :: one of
 e E

SignedInteger ::

DecimalDigits
+ *DecimalDigits*
- *DecimalDigits*

HexIntegerLiteral ::

0x *HexDigit*
0X *HexDigit*
HexIntegerLiteral *HexDigit*

The source character immediately following a *NumericLiteral* must not be an *IdentifierStart* or *DecimalDigit*.

NOTE

For example:

3in

is an error and not the two input elements **3** and **in**.

Semantics

A numeric literal stands for a value of the Number type. This value is determined in two steps: first, a mathematical value (MV) is derived from the literal; second, this mathematical value is rounded as described below.

The MV of *NumericLiteral* :: *DecimalLiteral* is the MV of *DecimalLiteral*.

The MV of *NumericLiteral* :: *HexIntegerLiteral* is the MV of *HexIntegerLiteral*.

The MV of *DecimalLiteral* :: *DecimalIntegerLiteral* is the MV of *DecimalIntegerLiteral*.

The MV of *DecimalLiteral* :: *DecimalIntegerLiteral* . *DecimalDigits* is the MV of *DecimalIntegerLiteral* plus (the MV of *DecimalDigits* times 10^{-n}), where n is the number of characters in *DecimalDigits*.

The MV of *DecimalLiteral* :: *DecimalIntegerLiteral* . *ExponentPart* is the MV of *DecimalIntegerLiteral* times 10^e , where e is the MV of *ExponentPart*.

The MV of *DecimalLiteral* :: *DecimalIntegerLiteral* . *DecimalDigits* *ExponentPart* is (the MV of *DecimalIntegerLiteral* plus (the MV of *DecimalDigits* times 10^{-n})) times 10^e , where n is the number of characters in *DecimalDigits* and e is the MV of *ExponentPart*.

The MV of *DecimalLiteral* :: . *DecimalDigits* is the MV of *DecimalDigits* times 10^{-n} , where n is the number of characters in *DecimalDigits*.

The MV of *DecimalLiteral* :: . *DecimalDigits* *ExponentPart* is the MV of *DecimalDigits* times 10^{e-n} , where n is the number of characters in *DecimalDigits* and e is the MV of *ExponentPart*.

The MV of *DecimalLiteral* :: *DecimalIntegerLiteral* is the MV of *DecimalIntegerLiteral*.

The MV of *DecimalLiteral* :: *DecimalIntegerLiteral* *ExponentPart* is the MV of *DecimalIntegerLiteral* times 10^e , where e is the MV of *ExponentPart*.

The MV of *DecimalIntegerLiteral* :: **0** is 0.

The MV of *DecimalIntegerLiteral* :: *NonZeroDigit* *DecimalDigits* is (the MV of *NonZeroDigit* times 10^n) plus the MV of *DecimalDigits*, where n is the number of characters in *DecimalDigits*.

The MV of *DecimalDigits* :: *DecimalDigit* is the MV of *DecimalDigit*.

The MV of *DecimalDigits* :: *DecimalDigits* *DecimalDigit* is (the MV of *DecimalDigits* times 10) plus the MV of *DecimalDigit*.

The MV of *ExponentPart* :: *ExponentIndicator* *SignedInteger* is the MV of *SignedInteger*.

The MV of *SignedInteger* :: *DecimalDigits* is the MV of *DecimalDigits*.

The MV of *SignedInteger* :: **+** *DecimalDigits* is the MV of *DecimalDigits*.

The MV of *SignedInteger* :: **-** *DecimalDigits* is the negative of the MV of *DecimalDigits*.

The MV of *DecimalDigit* :: **0** or of *HexDigit* :: **0** is 0.

The MV of *DecimalDigit* :: **1** or of *NonZeroDigit* :: **1** or of *HexDigit* :: **1** is 1.

The MV of *DecimalDigit* :: **2** or of *NonZeroDigit* :: **2** or of *HexDigit* :: **2** is 2.

The MV of *DecimalDigit* :: **3** or of *NonZeroDigit* :: **3** or of *HexDigit* :: **3** is 3.

The MV of *DecimalDigit* :: **4** or of *NonZeroDigit* :: **4** or of *HexDigit* :: **4** is 4.

The MV of *DecimalDigit* :: 5 or of *NonZeroDigit* :: 5 or of *HexDigit* :: 5 is 5.
The MV of *DecimalDigit* :: 6 or of *NonZeroDigit* :: 6 or of *HexDigit* :: 6 is 6.
The MV of *DecimalDigit* :: 7 or of *NonZeroDigit* :: 7 or of *HexDigit* :: 7 is 7.
The MV of *DecimalDigit* :: 8 or of *NonZeroDigit* :: 8 or of *HexDigit* :: 8 is 8.
The MV of *DecimalDigit* :: 9 or of *NonZeroDigit* :: 9 or of *HexDigit* :: 9 is 9.
The MV of *HexDigit* :: a or of *HexDigit* :: A is 10.
The MV of *HexDigit* :: b or of *HexDigit* :: B is 11.
The MV of *HexDigit* :: c or of *HexDigit* :: C is 12.
The MV of *HexDigit* :: d or of *HexDigit* :: D is 13.
The MV of *HexDigit* :: e or of *HexDigit* :: E is 14.
The MV of *HexDigit* :: f or of *HexDigit* :: F is 15.
The MV of *HexIntegerLiteral* :: 0x *HexDigit* is the MV of *HexDigit*.
The MV of *HexIntegerLiteral* :: 0X *HexDigit* is the MV of *HexDigit*.
The MV of *HexIntegerLiteral* :: *HexIntegerLiteral* *HexDigit* is (the MV of *HexIntegerLiteral* times 16) plus the MV of *HexDigit*.

Once the exact MV for a numeric literal has been determined, it is then rounded to a value of the Number type. If the MV is 0, then the rounded value is +0; otherwise, the rounded value must be *the* number value for the MV (in the sense defined in 8.5), unless the literal is a *DecimalLiteral* and the literal has more than 20 significant digits, in which case the number value may be either the number value for the MV of a literal produced by replacing each significant digit after the 20th with a 0 digit or the number value for the MV of a literal produced by replacing each significant digit after the 20th with a 0 digit and then incrementing the literal at the 20th significant digit position. A digit is *significant* if it is not part of an *ExponentPart* and

it is not 0; or

there is a nonzero digit to its left and there is a nonzero digit, not in the *ExponentPart*, to its right.

7.8.4 String Literals

A string literal is zero or more characters enclosed in single or double quotes. Each character may be represented by an escape sequence. [All Unicode characters may appear literally in a string literal except for the closing quote character, backslash, carriage return, line separator, paragraph separator, and line feed. Any character may appear in the form of an escape sequence.](#)

Syntax

StringLiteral ::

" *DoubleStringCharacters_{opt}* "
' *SingleStringCharacters_{opt}* '

DoubleStringCharacters ::

DoubleStringCharacter *DoubleStringCharacters_{opt}*

SingleStringCharacters ::

SingleStringCharacter *SingleStringCharacters_{opt}*

DoubleStringCharacter ::

SourceCharacter **but not** double-quote " **or** backslash \ **or** *LineTerminator*
\ *EscapeSequence*
[LineContinuation](#)

SingleStringCharacter ::

SourceCharacter **but not** single-quote ' **or** backslash \ **or** *LineTerminator*
\ *EscapeSequence*
[LineContinuation](#)

[LineContinuation](#) ::

\ [LineTerminatorSequence](#)

EscapeSequence ::
 CharacterEscapeSequence
 0 [lookahead \notin *DecimalDigit*]
 HexEscapeSequence
 UnicodeEscapeSequence

CharacterEscapeSequence ::
 SingleEscapeCharacter
 NonEscapeCharacter

SingleEscapeCharacter :: one of
 ' " \ b f n r t v

NonEscapeCharacter ::
 SourceCharacter but not *EscapeCharacter* or *LineTerminator*

EscapeCharacter ::
 SingleEscapeCharacter
 DecimalDigit
 x
 u

HexEscapeSequence ::
 x *HexDigit* *HexDigit*

UnicodeEscapeSequence ::
 u *HexDigit* *HexDigit* *HexDigit* *HexDigit*

The definitions of the nonterminal *HexDigit* is given in section 7.6. *SourceCharacter* is described in sections 2 and 6.

A string literal stands for a value of the *String* type. The string value (SV) of the literal is described in terms of character values (CV) contributed by the various parts of the string literal. As part of this process, some characters within the string literal are interpreted as having a mathematical value (MV), as described below or in section 7.8.3.

The SV of *StringLiteral* :: "" is the empty character sequence.

The SV of *StringLiteral* :: ' ' is the empty character sequence.

The SV of *StringLiteral* :: " *DoubleStringCharacters* " is the SV of *DoubleStringCharacters*.

The SV of *StringLiteral* :: ' *SingleStringCharacters* ' is the SV of *SingleStringCharacters*.

The SV of *DoubleStringCharacters* :: *DoubleStringCharacter* is a sequence of one character, the CV of *DoubleStringCharacter*.

The SV of *DoubleStringCharacters* :: *DoubleStringCharacter* *DoubleStringCharacters* is a sequence of the CV of *DoubleStringCharacter* followed by all the characters in the SV of *DoubleStringCharacters* in order.

The SV of *SingleStringCharacters* :: *SingleStringCharacter* is a sequence of one character, the CV of *SingleStringCharacter*.

The SV of *SingleStringCharacters* :: *SingleStringCharacter* *SingleStringCharacters* is a sequence of the CV of *SingleStringCharacter* followed by all the characters in the SV of *SingleStringCharacters* in order.

The SV of *LineContinuation* :: \ *LineTerminatorSequence* is the empty character sequence.

The CV of *DoubleStringCharacter* :: *SourceCharacter* but not double-quote " or backslash \ or *LineTerminator* is the *SourceCharacter* character itself.

The CV of *DoubleStringCharacter* :: \ *EscapeSequence* is the CV of the *EscapeSequence*.

The CV of *SingleStringCharacter* :: *SourceCharacter* but not single-quote ' or backslash \ or *LineTerminator* is the *SourceCharacter* character itself.

The CV of *SingleStringCharacter* :: \ *EscapeSequence* is the CV of the *EscapeSequence*.

The CV of *EscapeSequence* :: *CharacterEscapeSequence* is the CV of the *CharacterEscapeSequence*.

The CV of *EscapeSequence* :: 0 [lookahead \notin *DecimalDigit*] is a <NUL> character (Unicode value 0000).

The CV of *EscapeSequence* :: *HexEscapeSequence* is the CV of the *HexEscapeSequence*.

The CV of *EscapeSequence* :: *UnicodeEscapeSequence* is the CV of the *UnicodeEscapeSequence*.

Deleted: 7.8.3

The CV of *CharacterEscapeSequence* :: *SingleEscapeCharacter* is the character whose code unit value is determined by the *SingleEscapeCharacter* according to the following table:

Deleted: code point

<i>Escape Sequence</i>	<i>Code Unit Value</i>	<i>Name</i>	<i>Symbol</i>
<code>\b</code>	<code>\u0008</code>	backspace	<BS>
<code>\t</code>	<code>\u0009</code>	horizontal tab	<HT>
<code>\n</code>	<code>\u000A</code>	line feed (new line)	<LF>
<code>\v</code>	<code>\u000B</code>	vertical tab	<VT>
<code>\f</code>	<code>\u000C</code>	form feed	<FF>
<code>\r</code>	<code>\u000D</code>	carriage return	<CR>
<code>"</code>	<code>\u0022</code>	double quote	"
<code>'</code>	<code>\u0027</code>	single quote	'
<code>\</code>	<code>\u005C</code>	backslash	\

Deleted: Code Point

The CV of *CharacterEscapeSequence* :: *NonEscapeCharacter* is the CV of the *NonEscapeCharacter*.

The CV of *NonEscapeCharacter* :: *SourceCharacter* **but not** *EscapeCharacter* **or** *LineTerminator* is the *SourceCharacter* character itself.

The CV of *HexEscapeSequence* :: *x HexDigit HexDigit* is the character whose code unit value is (16 times the MV of the first *HexDigit*) plus the MV of the second *HexDigit*.

Deleted: code point

The CV of *UnicodeEscapeSequence* :: *u HexDigit HexDigit HexDigit HexDigit* is the character whose code unit value is (4096 (that is, 16³) times the MV of the first *HexDigit*) plus (256 (that is, 16²) times the MV of the second *HexDigit*) plus (16 times the MV of the third *HexDigit*) plus the MV of the fourth *HexDigit*.

Deleted: code point

NOTE

A line terminator character cannot appear in a string literal, except when preceded by a backslash _as a 'LineContinuation' to produce the empty character sequence. The correct way to cause a line terminator character to be part of the string value of a string literal is to use an escape sequence such as `\n` or `\u000A`.

Deleted: 'LineTerminator'

Deleted: even if

7.8.5 Regular Expression Literals

A regular expression literal is an input element that is converted to a `RegExp` object (section 15.10) each time the literal is evaluated. Two regular expression literals in a program evaluate to regular expression objects that never compare as `===` to each other even if the two literals' contents are identical. A `RegExp` object may also be created at runtime by `new RegExp` (section 15.10.4) or calling the `RegExp` constructor as a function (section 15.10.3).

Deleted: when it is scanned

Deleted: The object is created before evaluation of the containing program or function begins. Evaluation of the literal produces a reference to that object; it does not create a new object.

The productions below describe the syntax for a regular expression literal and are used by the input element scanner to find the end of the regular expression literal. The strings of characters comprising the *RegularExpressionBody* and the *RegularExpressionFlags* are passed uninterpreted to the regular expression constructor, which interprets them according to its own, more stringent grammar. An implementation may extend the regular expression constructor's grammar, but it should not extend the *RegularExpressionBody* and *RegularExpressionFlags* productions or the productions used by these productions.

Syntax

RegularExpressionLiteral ::
/ *RegularExpressionBody* / *RegularExpressionFlags*

RegularExpressionBody ::
RegularExpressionFirstChar *RegularExpressionChars*

RegularExpressionChars ::
[empty]
RegularExpressionChars *RegularExpressionChar*

RegularExpressionFirstChar ::
NonTerminator **but not** * or \ or / or [
BackslashSequence
RegularExpressionClass

RegularExpressionChar ::
NonTerminator **but not** \ or / or [
BackslashSequence
RegularExpressionClass

BackslashSequence ::
 \ *NonTerminator*

NonTerminator ::
SourceCharacter **but not** *LineTerminator*

RegularExpressionClass ::
 [*RegularExpressionClassChars*]

RegularExpressionClassChars ::
 [empty]
RegularExpressionClassChars *RegularExpressionClassChar*

RegularExpressionClassChar ::
NonTerminator **but not** / or \ *BackslashSequence*

RegularExpressionFlags ::
 [empty]
RegularExpressionFlags *IdentifierPart*

NOTE
Regular expression literals may not be empty; instead of representing an empty regular expression literal, the characters // start a single-line comment. To specify an empty regular expression, use /(?:)/.

Semantics

A regular expression literal evaluates to a value of the Object type that is an instance of the standard built-in constructor *RegExp*. This value is determined in two steps: first, the characters comprising the regular expression's *RegularExpressionBody* and *RegularExpressionFlags* production expansions are collected uninterpreted into two strings *Pattern* and *Flags*, respectively. Then each time the literal is evaluated, a new object is created as if by the expression `new RegExp(Pattern, Flags)` where *RegExp* is the standard built-in constructor with that name. The newly constructed object, becomes the value of the *RegularExpressionLiteral*. If the call to `new RegExp` would generate an error, the error must be reported while scanning the program.

7.9 Automatic Semicolon Insertion

Certain ECMAScript statements (empty statement, variable statement, expression statement, **do-while** statement, **continue** statement, **break** statement, **return** statement, and **throw** statement) must be terminated with semicolons. Such semicolons may always appear explicitly in the source text. For convenience, however, such semicolons may be omitted from the source text in certain situations. These situations are described by saying that semicolons are automatically inserted into the source code token stream in those situations.

7.9.1 Rules of Automatic Semicolon Insertion

- When, as the program is parsed from left to right, a token (called the *offending token*) is encountered that is not allowed by any production of the grammar, then a semicolon is automatically inserted before the offending token if one or more of the following conditions is true:
 1. The offending token is separated from the previous token by at least one *LineTerminator*.

Deleted: *RegularExpressionClassPreamble*

Deleted: *RegularExpressionClassPreamble* ::
 [empty]
 ^
 -
 ^-q

Deleted: or -
 - *RegularExpressionClassChar*
Backslash

Deleted: stands for

Deleted: constructor is called with two arguments *Pattern* and *Flags* and *t*

Deleted: result

Deleted: becomes the value of the *RegularExpressionLiteral*

Deleted: If

Deleted: s

Deleted: an implementation may, at its discretion, either report the error immediately while scanning the program, or it may defer the error until the regular expression literal is evaluated in the course of program execution

2. The offending token is }.

- When, as the program is parsed from left to right, the end of the input stream of tokens is encountered and the parser is unable to parse the input token stream as a single complete ECMAScript *Program*, then a semicolon is automatically inserted at the end of the input stream.
- When, as the program is parsed from left to right, a token is encountered that is allowed by some production of the grammar, but the production is a *restricted production* and the token would be the first token for a terminal or nonterminal immediately following the annotation “[no *LineTerminator* here]” within the restricted production (and therefore such a token is called a restricted token), and the restricted token is separated from the previous token by at least one *LineTerminator*, then a semicolon is automatically inserted before the restricted token.

However, there is an additional overriding condition on the preceding rules: a semicolon is never inserted automatically if the semicolon would then be parsed as an empty statement or if that semicolon would become one of the two semicolons in the header of a **for** statement (section 12.6.3).

NOTE

These are the only restricted productions in the grammar:

PostfixExpression :

LeftHandSideExpression [no *LineTerminator* here] ++
LeftHandSideExpression [no *LineTerminator* here] --

ContinueStatement :

continue [no *LineTerminator* here] *Identifier*_{opt} ;

BreakStatement :

break [no *LineTerminator* here] *Identifier*_{opt} ;

ReturnStatement :

return [no *LineTerminator* here] *Expression*_{opt} ;

ThrowStatement :

throw [no *LineTerminator* here] *Expression* ;

The practical effect of these restricted productions is as follows:

- When a ++ or -- token is encountered where the parser would treat it as a postfix operator, and at least one *LineTerminator* occurred between the preceding token and the ++ or -- token, then a semicolon is automatically inserted before the ++ or -- token.
- When a **continue**, **break**, **return**, or **throw** token is encountered and a *LineTerminator* is encountered before the next token, a semicolon is automatically inserted after the **continue**, **break**, **return**, or **throw** token.

The resulting practical advice to ECMAScript programmers is:

- A postfix ++ or -- operator should appear on the same line as its operand.
- An *Expression* in a **return** or **throw** statement should start on the same line as the **return** or **throw** token.
- A label in a **break** or **continue** statement should be on the same line as the **break** or **continue** token.

7.9.2 Examples of Automatic Semicolon Insertion

The source

```
{ 1 2 } 3
```

is not a valid sentence in the ECMAScript grammar, even with the automatic semicolon insertion rules. In contrast, the source

```
{ 1  
2 } 3
```

is also not a valid ECMAScript sentence, but is transformed by automatic semicolon insertion into the following:

```
{ 1
;2 ;} 3;
```

which is a valid ECMAScript sentence.

The source

```
for (a; b
)
```

is not a valid ECMAScript sentence and is not altered by automatic semicolon insertion because the semicolon is needed for the header of a **for** statement. Automatic semicolon insertion never inserts one of the two semicolons in the header of a **for** statement.

The source

```
return
a + b
```

is transformed by automatic semicolon insertion into the following:

```
return;
a + b;
```

NOTE

*The expression **a + b** is not treated as a value to be returned by the **return** statement, because a 'LineTerminator' separates it from the token **return**.*

The source

```
a = b
++c
```

is transformed by automatic semicolon insertion into the following:

```
a = b;
++c;
```

NOTE

*The token **++** is not treated as a postfix operator applying to the variable **b**, because a 'LineTerminator' occurs between **b** and **++**.*

The source

```
if (a > b)
else c = d
```

is not a valid ECMAScript sentence and is not altered by automatic semicolon insertion before the **else** token, even though no production of the grammar applies at that point, because an automatically inserted semicolon would then be parsed as an empty statement.

The source

```
a = b + c
(d + e).print()
```

is *not* transformed by automatic semicolon insertion, because the parenthesised expression that begins the second line can be interpreted as an argument list for a function call:

```
a = b + c(d + e).print()
```

In the circumstance that an assignment statement must begin with a left parenthesis, it is a good idea for the programmer to provide an explicit semicolon at the end of the preceding statement rather than to rely on automatic semicolon insertion.

8 Types

Algorithms within this specification manipulate values each of which has an associated type. The possible value types are exactly those defined in this section. Types are further subclassified into ECMAScript language types and specification types.

An ECMAScript language type corresponds to values that are directly manipulated by an ECMAScript programmer using the ECMAScript language. The ECMAScript language types are Undefined, Null, Boolean, String, Number, and Object.

A specification type corresponds to meta-values that are used within algorithms to describe the semantics of ECMAScript language constructs and ECMAScript language types. The specification types are Reference, List, Completion, Property Descriptor, Property Identifier, Lexical Environment, and Environment Record. Specification type values are specification artefacts that do not necessarily correspond to any specific entity within an ECMAScript implementation. Specification type values are used to describe intermediate results of ECMAScript expression evaluation but such values cannot be stored as properties of objects or values of ECMAScript language variables.

8.1 The Undefined Type

The Undefined type has exactly one value, called **undefined**. Any variable that has not been assigned a value has the value **undefined**.

8.2 The Null Type

The Null type has exactly one value, called **null**.

8.3 The Boolean Type

The Boolean type represents a logical entity having two values, called **true** and **false**.

8.4 The String Type

The String type is the set of all finite ordered sequences of zero or more 16-bit unsigned integer values (“elements”). The String type is generally used to represent textual data in a running ECMAScript program, in which case each element in the string is treated as a **code unit** value (see section 6). Each element is regarded as occupying a position within the sequence. These positions are indexed with nonnegative integers. The first element (if any) is at position 0, the next element (if any) at position 1, and so on. The length of a string is the number of elements (i.e., 16-bit values) within it. The empty string has length zero and therefore contains no elements.

When a string contains actual textual data, each element is considered to be a single UTF-16 unit. Whether or not this is the actual storage format of a String, the characters within a String are numbered as though they were represented using UTF-16. All operations on Strings (except as otherwise stated) treat them as sequences of undifferentiated 16-bit unsigned integers; they do not ensure the resulting string is in normalised form, nor do they ensure language-sensitive results.

NOTE

The rationale behind these decisions was to keep the implementation of Strings as simple and high-performing as possible. The intent is that textual data coming into the execution environment from outside (e.g., user input, text read from a file or received over the network, etc.) be converted to Unicode Normalised Form C before the running program sees it. Usually this would occur at the same time incoming text is converted from its original character encoding to Unicode (and would impose no additional overhead). Since it is recommended that ECMAScript source code be in Normalised Form C, string literals are guaranteed to be normalised (if source text is guaranteed to be normalised), as long as they do not contain any Unicode escape sequences.

8.5 The Number Type

The Number type has exactly 18437736874454810627 (that is, $2^{64} - 2^{53} + 3$) values, representing the double-precision 64-bit format IEEE 754 values as specified in the IEEE Standard for Binary Floating-Point Arithmetic, except that the 9007199254740990 (that is, $2^{53} - 2$) distinct “Not-a-Number” values of the IEEE

Deleted: A value is an entity that takes on one of nine types. There are nine types (Undefined, Null, Boolean, String, Number, Object, Reference, List, and Completion). Values of type Reference, List, and Completion are used only as intermediate results of expression evaluation and cannot be stored as properties of objects.

Deleted: code point

Standard are represented in ECMAScript as a single special NaN value. (Note that the NaN value is produced by the program expression NaN.) In some implementations, external code might be able to detect a difference between various Not-a-Number values, but such behaviour is implementation-dependent; to ECMAScript code, all NaN values are indistinguishable from each other.

Deleted: , assuming that the globally defined variable NaN has not been altered by program execution

Deleted: Non

There are two other special values, called positive Infinity and negative Infinity. For brevity, these values are also referred to for expository purposes by the symbols +∞ and -∞, respectively. (Note that these two infinite number values are produced by the program expressions +Infinity (or simply Infinity) and -Infinity.)

Deleted: , assuming that the globally defined variable Infinity has not been altered by program execution

The other 18437736874454810624 (that is, 2⁶⁴-2⁵³) values are called the finite numbers. Half of these are positive numbers and half are negative numbers; for every finite positive number there is a corresponding negative number having the same magnitude.

Note that there is both a positive zero and a negative zero. For brevity, these values are also referred to for expository purposes by the symbols +0 and -0, respectively. (Note that these two zero number values are produced by the program expressions +0 (or simply 0) and -0.)

The 18437736874454810622 (that is, 2⁶⁴-2⁵³-2) finite nonzero values are of two kinds:

18428729675200069632 (that is, 2⁶⁴-2⁵⁴) of them are normalised, having the form

$$s \times m \times 2^e$$

where *s* is +1 or -1, *m* is a positive integer less than 2⁵³ but not less than 2⁵², and *e* is an integer ranging from -1074 to 971, inclusive.

The remaining 9007199254740990 (that is, 2⁵³-2) values are denormalised, having the form

$$s \times m \times 2^e$$

where *s* is +1 or -1, *m* is a positive integer less than 2⁵², and *e* is -1074.

Note that all the positive and negative integers whose magnitude is no greater than 2⁵³ are representable in the Number type (indeed, the integer 0 has two representations, +0 and -0).

A finite number has an *odd significand* if it is nonzero and the integer *m* used to express it (in one of the two forms shown above) is odd. Otherwise, it has an *even significand*.

In this specification, the phrase “the number value for *x*” where *x* represents an exact nonzero real mathematical quantity (which might even be an irrational number such as π) means a number value chosen in the following manner. Consider the set of all finite values of the Number type, with -0 removed and with two additional values added to it that are not representable in the Number type, namely 2¹⁰²⁴ (which is +1 × 2⁵³ × 2⁹⁷¹) and -2¹⁰²⁴ (which is -1 × 2⁵³ × 2⁹⁷¹). Choose the member of this set that is closest in value to *x*. If two values of the set are equally close, then the one with an even significand is chosen; for this purpose, the two extra values 2¹⁰²⁴ and -2¹⁰²⁴ are considered to have even significands. Finally, if 2¹⁰²⁴ was chosen, replace it with +∞; if -2¹⁰²⁴ was chosen, replace it with -∞; if +0 was chosen, replace it with -0 if and only if *x* is less than zero; any other chosen value is used unchanged. The result is the number value for *x*. (This procedure corresponds exactly to the behaviour of the IEEE 754 “round to nearest” mode.)

Some ECMAScript operators deal only with integers in the range -2³¹ through 2³¹-1, inclusive, or in the range 0 through 2³²-1, inclusive. These operators accept any value of the Number type but first convert each such value to one of 2³² integer values. See the descriptions of the ToInt32 and ToUint32 operators in sections 9.5 and 9.6, respectively.

Deleted: 0

Deleted: 0

Deleted: an unordered

8.6 The Object Type

An Object is a collection of properties. Each property is either a named data property, a named accessor property, or an internal property.

- A named data property associates a name with a value and a set of boolean attributes.
- A named accessor property associates a name with a get method, a set method, and a set of boolean attributes.

- An *internal property* has no name and is not directly accessible via the property accessor operators. Internal properties exist purely for specification purposes. How and when internal properties are used is specified by the language specification below.

There are two types of access for normal (non-internal) properties: *get* and *put*, corresponding to retrieval and assignment, respectively.

8.6.1 Property Attributes

Attributes are used in this specification to define and explain the state of named properties. A named data property associates a name with the following attributes:

Table 1 Attributes of a Named Data Property

<i>Attribute Name</i>	<i>Value Domain</i>	<i>Description</i>
[[Value]]	Any ECMAScript language type	The value retrieved by reading the property.
[[Writable]]	Boolean	If false , attempts by ECMAScript code to assign the property's value will not succeed.
[[Enumerable]]	Boolean	If true , the property will be enumerated by a for-in enumeration (section 12.6.4). Otherwise, the property is said to be non-enumerable.
[[Configurable]]	Boolean	If false , attempts to delete the property, change the property to be an accessor property, or change its attributes will fail.

A named accessor property associates a name with the following attributes:

Table 2 Attributes of a Named Accessor Property

<i>Attribute Name</i>	<i>Value Type Domain</i>	<i>Description</i>
[[Get]]	Object or Undefined	If the value is an Object it must be a function. The function is called with no-arguments to return the property value each time the property is read.
[[Set]]	Object or Undefined	If the value is an Object it must be a function. The function is called with the assigned value as its sole argument each time the property is assigned. The effect of a property's [[Set]] method may, but is not required to, have an effect on the value returned by subsequent calls to the property's [[Get]] function.
[[Enumerable]]	Boolean	If true , the property is to be enumerated by a for-in enumeration (section 12.6.4). Otherwise, the property is said to be non-enumerable.
[[Configurable]]	Boolean	If false , attempts to delete the property, change the property to be a data property, or change its attributes will fail.

If the value of an attribute is not explicitly specified for a named property, the default value as defined in the following table is used:

Table 3 Default Attribute Values

<i>Attribute</i>	<i>Default Value</i>

Deleted: consists of a name, a value and a set of attributes.

Deleted: it

Deleted: A property can have zero or more attributes from the following set:

Attribute



Name	
[[Value]]	undefined
[[Get]]	undefined
[[Set]]	undefined
[[Writable]]	false
[[Enumerable]]	false
[[Configurable]]	false

8.6.2 Object Internal Properties and Methods

This specification uses various internal properties and methods to define the semantics of object values. These internal properties and methods are not part of the ECMAScript language. They are defined by this specification purely for expository purposes. An implementation of ECMAScript must behave as if it produced and operated upon internal properties in the manner described here. For the purposes of this document, the names of internal properties are enclosed in double square brackets [[]]. When an algorithm uses an internal property of an object and the object does not implement the indicated internal property, a **TypeError** exception is thrown.

The following table summarises the internal properties used by this specification that are applicable to all ECMAScript objects. The description indicates their behaviour for native ECMAScript objects, unless stated otherwise in this document for particular types of ECMAScript objects. In particular, Array objects have a slightly different definition of the [[DefineOwnProperty]] method (see 15.4.5.1) and String objects have a different definition of the [[GetOwnProperty]] method. Host objects may support these internal properties with any implementation-dependent behaviour, or it may be that a host object supports only some internal properties and not others.

The “Value Type Domain” column of the following tables define the types of values associated with internal properties. The type names refer to the types defined in section 8 augmented by the following additional names. “any” means the value may be any ECMAScript language type. “primitive” means Undefined, Null, Boolean, String, or Number. “SpecOp” means the internal property is an implementation provided procedure defined by an abstract operation specification. “SpecOp” is followed by a list of descriptive parameter names. If a parameter name is the same as a type name then the name describes the type of the parameter. If a “SpecOp” returns a value its parameter list is followed by the symbol “→” and the type of the returned value.

Table 4 Internal Properties Common to All Objects

Deleted: Internal

Deleted: There are two types of access for normal (non-internal) properties: *get* and *put*, corresponding to retrieval and assignment, respectively.¶
Native ECMAScript objects have an internal property called [[Prototype]]. The value of this property is either null or an object and is used for implementing inheritance. Properties of the [[Prototype]] object are visible as properties of the child object for the purposes of get access, but not for put access.¶

Deleted: ThrowingPut

Deleted: implement

Deleted: methods

Deleted: implements

Deleted: methods

Internal Property	Value Type Domain	Description
[[Prototype]]	Object or Null	The prototype of this object.
[[Class]]	String	A string value indicating a specification defined classification of objects.
[[PrimitiveValue]]	primitive	Internal state information associated with this object.
[[Extensible]]	Boolean	If true, own properties may be added to the object.
[[Get]]	SpecOp(<i>propertyName</i>) → any	Returns the value of the named property.
[[GetOwnProperty]]	SpecOp(<i>propertyName</i>) → Undefined or Property Descriptor	Returns the Property Descriptor of the named own property of this object, or undefined if absent.
[[GetProperty]]	SpecOp(<i>propertyName</i>) → Undefined or Property Descriptor	Returns the fully populated Property Descriptor of the named property of this object, or undefined if absent.
[[Put]]	SpecOp(<i>propertyName, any</i>)	Sets the specified named property to the value of the second parameter.
[[CanPut]]	SpecOp(<i>propertyName</i>) → Boolean	Returns a Boolean value indicating whether a [[Put]] operation with <i>propertyName</i> can be performed.
[[HasProperty]]	SpecOp(<i>propertyName</i>) → boolean	Returns a Boolean value indicating whether the object already has a property with the given name.
[[Delete]]	SpecOp(<i>propertyName, Boolean</i>) → Boolean	Removes the specified named own property from the object. The flag controls failure handling.
[[DefaultValue]]	SpecOp(<i>Hint</i>) → primitive	Hint is a string. Returns a default value for the object.
[[DefineOwnProperty]]	SpecOp(<i>propertyName, PropertyDescriptor, Boolean</i>)	Creates or alters the named own property to have the state described by a Property Descriptor. The flag controls failure handling.
[[ThrowingPut]]	SpecOp(<i>propertyName, any, Boolean</i>)	Sets the specified named property to the value of the second parameter. The flag controls failure handling.

- Deleted: Parameters
- Deleted: none
- Deleted: none
- Deleted: the kind of this object
- Deleted: none
- Deleted: P
- Deleted: P
- Deleted: Value
- Deleted: Value
- Deleted: P
- Deleted: boolean
- Deleted: will succeed
- Deleted: P
- Deleted: b
- Deleted: member
- Deleted: , which should be a primitive value (not an object or reference)
- Deleted: [[Construct]]

All ECMAScript objects have an internal property called [[Prototype]]. The value of this property is either null or an object and is used for implementing inheritance. Named data properties of the [[Prototype]] object are inherited (are visible as properties of the child object) for the purposes of get access, but not for put access. Named accessor properties are inherited for both get access and put access.

Every object (including host objects) must implement the [[Prototype]], [[Class]], and [[Extensible]] internal data properties and the [[Get]], [[GetProperty]], [[GetOwnProperty]], [[DefineOwnProperty]], [[Put]], [[CanPut]], [[ThrowingPut]], [[HasProperty]], [[Delete]], and [[DefaultValue]] internal methods. (Note, however, that the [[DefaultValue]] method may, for some objects, simply throw a TypeError exception.)

The value of the [[Prototype]] property must be either an object or null, and every [[Prototype]] chain must have finite length (that is, starting from any object, recursively accessing the [[Prototype]] property must eventually lead to a null value). Whether or not a native object can have a host object as its [[Prototype]] depends on the implementation.

The value of the [[Class]] property is defined by this specification for every kind of built-in object. The value of the [[Class]] property of a host object may be any String value except one of "Array", "Boolean", "Date", "Error", "Function", "JSON", "Math", "Number", "Object", "RegExp", and "String". The value of a [[Class]] property is used internally to distinguish different kinds of built-in objects. Note that this specification does not provide any means for a program to access that value except through Object.prototype.toString (see 15.2.4.2).

For most native objects the common internal methods behave as described in 8.12, except that Array objects have a slightly different implementation of the [[DefineOwnProperty]] method (see 15.4.5.1) and String objects have a slightly different implementation of the [[GetOwnProperty]] method (see 15.5.5.2). Arguments objects (10.5) have different implementations of [[Get]], [[GetOwnProperty]], [[DefineOwnProperty]], and [[Delete]]. Host objects may implement these methods in any manner unless

- Deleted: and
- Deleted: , however, if a host objects has a [[Class]] property whose value is the same as that defined by this specification for a built-in object then the host object must conform to all requirements associated with that built-in object
- Deleted: even a value used by a built-in object for its [[Class]] property
- Deleted: [[Get]], [[Put]], [[CanPut]], [[HasProperty]], [[Delete]] and [[DefaultValue]]
- Deleted: 8.6.2.1, 8.6.2.2, 8.6.2.3, 8.6.2.4, 8.6.2.5 and 8.6.2.6, respectively
- Deleted: ThrowingPut
- Deleted: [[ThrowingPut]],

specified otherwise; for example, one possibility is that `[[Get]]` and `[[Put]]` for a particular host object indeed fetch and store property values but `[[HasProperty]]` always generates **false**.

Table 5 Internal Properties Only Defined for Some Objects

<i>Internal Property</i>	<i>Value Type Domain</i>	<i>Description</i>
<code>[[Construct]]</code>	<code>SpecOp(a List of any) → Object</code>	Constructs an object. Invoked via the new operator. The arguments to the <code>SpecOp</code> are the arguments passed to the new operator. Objects that implement this internal method are called <i>constructors</i> .
<code>[[Call]]</code>	<code>SpecOp(a List of any) → any or Reference</code>	Executes code associated with the object. Invoked via a function call expression. The arguments to the <code>SpecOp</code> are the arguments passed to the function call expression. Objects that implement this internal method are <i>functions</i> . Only functions that are host objects may return Reference values.
<code>[[HasInstance]]</code>	<code>SpecOp(any) → Boolean</code>	Returns a Boolean value indicating whether the argument is an Object that delegates behaviour to this object. Of the standard built-in ECMAScript objects, only Objects that are instances of the standard built-in constructor Function implement <code>[[HasInstance]]</code> .
<code>[[Scope]]</code>	Lexical Environment	A lexical environment that defines the environment in which a Function object is executed. Of the standard built-in ECMAScript objects, only objects that are instances of the standard built-in constructor Function implement <code>[[Scope]]</code> .
<code>[[FormalParameters]]</code>	List of Strings	A possibly empty List containing the identifier strings of a Function's <i>FormalParameterList</i> . Of the standard built-in ECMAScript objects, only Objects that are instances of the standard built-in constructor Function implement <code>[[FormalParameterList]]</code> .
<code>[[Code]]</code>	ECMAScript code	The ECMAScript code of a function. Of the standard built-in ECMAScript objects, only Objects that are instances of the standard built-in constructor Function implement <code>[[Code]]</code> .
<code>[[TargetFunction]]</code>	Object	The target function of a function object created using the standard built-in <code>Function.prototype.bind</code> method. Only ECMAScript objects that are bound using <code>Function.prototype.bind</code> have a <code>[[TargetFunction]]</code> internal property.
<code>[[BoundThis]]</code>	<i>any</i>	The pre-bound this value of a function Object created using the standard built-in <code>Function.prototype.bind</code> method. Only ECMAScript objects that are bound using <code>Function.prototype.bind</code> have a <code>[[BoundThis]]</code> internal property.
<code>[[BoundArguments]]</code>	List of <i>any</i>	The pre-bound argument values of a function Object created using the standard built-in <code>Function.prototype.bind</code> method. Only ECMAScript objects bound using <code>Function.prototype.bind</code> have a <code>[[BoundArguments]]</code> internal property.
<code>[[Match]]</code>	<code>SpecOp(string, index) → MatchResult</code>	Tests for a regular expression match and returns a <code>MatchResult</code> value (see section 15.10.2.1). Of the standard built-in ECMAScript objects only objects that are instances of the standard built-in constructor <code>RegExp</code> implement <code>[[Match]]</code> .
<code>[[ParameterMap]]</code>	Object	Provides a mapping between the properties of an arguments object (10.5) and the formal parameters of the associated function. Only ECMAScript objects that

Deleted: In the following algorithm descriptions, assume *O* is a native ECMAScript object and *P* is a string.

Deleted: `[[IsArray]]` ...

		are arguments object have a [[ParameterMap]] internal property.
--	--	---

8.7 The Reference Specification Type

The Reference type is used to explain the behaviour of such operators as **delete**, **typeof**, and the assignment operators. For example, the left-hand operand of an assignment is expected to produce a reference. The behaviour of assignment could, instead, be explained entirely in terms of a case analysis on the syntactic form of the left-hand operand of an assignment operator, but for one difficulty: function calls are permitted to return references. This possibility is admitted purely for the sake of host objects. No built-in ECMAScript function defined by this specification returns a reference and there is no provision for a user-defined function to return a reference. (Another reason not to use a syntactic case analysis is that it would be lengthy and awkward, affecting many parts of the specification.)

A Reference is a reference to a resolved name binding. A Reference consists of three components, the *base value*, the *referenced name* and the Boolean valued *strict reference* flag. The base value is either **null**, an **Object**, a **Boolean**, a **String**, a **Number**, or an environment record (10.2.1). A base value of **null** indicates that the reference could not be resolved to a binding. The referenced name is a **String**.

The following abstract operations are used in this specification to access the components of references:

- **GetBase(V)**. Returns the base **value** component of the reference V.
- **GetReferencedName(V)**. Returns the **referenced** name component of the reference V.
- **IsStrictReference(V)**. Returns the **strict reference** component of the reference V.
- **HasPrimitiveBase(V)**. Returns **true** if the base value is a **Boolean**, **String**, or **Number**.
- **IsPropertyReference(V)**. Returns **true** if the base value is an object and **false** if the base value is an environment record.
- **IsUnresolvableReference(V)**. Returns **true** if the base value is **null** and **false** otherwise.

The following abstract operations are used in this specification to operate on references:

8.7.1 GetValue (V)

1. If **Type(V)** is not **Reference**, return V.
2. Let *base* be the result of calling **GetBase(V)**.
3. If **UnresolvableReference(V)**, throw a **ReferenceError** exception.
4. If **IsPropertyReference(V)**, then
 - a. If **HasPrimitiveBase(V)**, then let *base* be **ToObject(base)** (9.9)
 - b. Return the result of calling the **[[Get]]** method of *base*, passing **GetReferencedName(V)** for the argument.
5. Else, *base* must be an environment record.
 - a. Return the result of calling the **GetBindingValue(N, S)** concrete method of *base*, passing **GetReferencedName(V)** and **IsStrictReference(V)** as arguments.

NOTE

The object that may be created in step 4a is immediately discarded after its use in that step. An implementation might choose to avoid the actual creation of the object.

8.7.2 PutValue (V, W)

1. If **Type(V)** is not **Reference**, throw a **ReferenceError** exception.
2. Let *base* be the result of calling **GetBase(V)**.
3. If **UnresolvableReference(V)**, then
 - a. If **IsStrictReference(V)** is **true**,
 - i. If **GetReferencedName(V)** is "eval", then throw an **EvalError** exception.
 - ii. Else, throw **ReferenceError** exception.
 - b. Call the **[[ThrowingPut]]** method for the global object, passing **GetReferencedName(V)** for the property name, W for the value, and **false** for the *Throw* flag.
4. Else if **IsPropertyReference(V)**, then
 - a. If **HasPrimitiveBase(V)** is **false**, then let *put* be the **[[ThrowingPut]]** internal method of *base*, otherwise let *put* be the special **[[ThrowingPut]]** method defined below.
 - b. Call the *put* internal method using *base* as its **this** object, and passing **GetReferencedName(V)** for the property name, W for the value, and **IsStrictReference(V)** for the *Throw* flag.

Deleted: ¶
8.6.2.1 [[Get]] (P)¶
 When the **[[Get]]** method of O is called with property name P, the following steps are taken.¶
 If O doesn't have a property with name P, go to step 4.¶
 Get the value of the property.¶
 Return Result(2).¶
 If the **[[Prototype]]** of O is **null**, return **undefined**.¶
 Call the **[[Get]]** method of **[[Prototype]]** with property name P.¶
 Return Result(5).¶

8.6.2.2 [[Put]] (P, V)¶
 When the **[[Put]]** method of O is called with property P and value V, the following steps are taken.¶
 <#>Call the **[[CanPut]]** method of O with name P.¶
 <#>If Result(1) is **false**, return.¶
 <#>If O doesn't have a property with name P, go to step 6.¶
 <#>Set the value of the property to V. The attributes of the property are not changed.¶
 <#>Return.¶
 <#>Create a property with name P, set its value to V and give it empty attributes.¶
 <#>Return.¶

Note, however, that if O is an Array object, it has a more elaborate **[[Put]]** method (15.4.5.1).¶

8.6.2.3 [[CanPut]] (P)¶
 The **[[CanPut]]** method is used only by the **[[Put]]** method.¶
 When the **[[CanPut]]** method of O is called with property P, the following steps are taken.¶
 If O doesn't have a property with name P, go to step 4.¶
 If the property has the **ReadOnly** attribute, return **false**.¶
 Return **true**.¶
 If the **[[Prototype]]** of O is **null**, return **true**.¶
 Call the **[[CanPut]]** method of **[[Prototype]]** of O with property name P.¶
 <#>Return Result(5).¶

8.6.2.4 [[HasProperty]] (P)¶
 When the **[[HasProperty]]** method of O is called with property name P, the following steps are taken.¶
 If O has a property with name P, return **true**.¶
 If the **[[Prototype]]** of O is **null**, return **false**.¶

Deleted: The internal Reference type is not a language data type. It is defined by this specification purely for expository purposes. An implementation of ECMAScript must behave as if it produced and opera...

Deleted: Another use of the Reference type is to explain the determination of the **this** value for a function call.¶

Deleted: object

Deleted: GetPropertyName

Deleted: property

Deleted: Call

Deleted: Result(2) is null

Deleted: Call

Deleted: Result(2)

Deleted: GetPropertyName

Deleted: property name

Deleted: Result(2)

Deleted: Return Result(4).

Deleted: then throw a ReferenceError exception.

5. Else *base* must be a reference whose base is an environment record. So,
 - a. If `GetReferencedName(V)` is "eval", then throw an **EvalError** exception.
 - b. Call the `SetMutableBinding(N, V, S)` concrete method of *base*, passing `GetReferencedName(V)` for *N*, *W* for *V*, and `IsStrictReference(V)` for *S*.
6. Return.

The following `[[ThrowingPut]]` internal method is used by `PutValue` when when *V* is a property reference with a primitive base value. It is called using *Base* as its **this** value and with property *P*, value *V*, and boolean flag *Throw* as arguments. The following steps are taken:

1. Let *O* be `ToObject(Base)`.
2. If the result of calling the `[[CanPut]]` internal method of *O* with argument *P* is **false**, then
 - a. If *Throw* is **true**, then throw a **TypeError** exception.
 - b. Else return.
3. Let *ownDesc* be the result of calling the `[[GetOwnProperty]]` method of *O* with argument *P*.
4. If `IsDataDescriptor(ownDesc)` is **true**, then
 - a. If *Throw* is **true**, then throw a **TypeError** exception.
 - b. Else Return.
5. Let *desc* be the result of calling the `[[GetProperty]]` method of *O* with argument *P*. This may be either an own or inherited accessor property descriptor or an inherited data property descriptor.
6. If `IsAccessorDescriptor(desc)` is **true**, then
 - a. Let *setter* be *desc*.[[Set]] which cannot be **undefined**.
 - b. Call the `[[Call]]` method of *setter* providing *Base* as the **this** value and providing *V* as the sole argument.
7. Else, this is a request to create an own property on the transient object *O*
 - a. If *Throw* is **true**, then throw a **TypeError** exception.
8. Return.

NOTE

The object that may be created in step 1 is not accessible outside of the above method. An implementation might choose to avoid the actual creation of that transient object. The only situations where such an actual property assignment that uses this internal method can have visible effect are when it either invokes an accessor function or is in violation of a *Throw* conditioned error check. When *Throw* is **true** any property assignment that would create a new property on the transient object throws an error.

8.8 The List Specification Type

The List type is used to explain the evaluation of argument lists (see 11.2.4) in **new** expressions, in function calls, and in other algorithms where a simple list of values is needed. Values of the List type are simply ordered sequences of values. These sequences may be of any length.

8.9 The Completion Specification Type

The Completion type is used to explain the behaviour of statements (**break**, **continue**, **return** and **throw**) that perform nonlocal transfers of control. Values of the Completion type are triples of the form (*type*, *value*, *target*), where *type* is one of **normal**, **break**, **continue**, **return**, or **throw**, *value* is any ECMAScript language value or **empty**, and *target* is any ECMAScript identifier or **empty**.

The term "abrupt completion" refers to any completion with a type other than **normal**.

8.10 The Property Descriptor and Property Identifier Specification Types

The Property Descriptor type is used to explain the manipulation and reification of named property attributes. Values of the Property Descriptor type are records composed of named fields where each field's name is an attribute name and its value is a corresponding attribute value. In addition, any field may be present or absent.

Property Descriptor values may be further classified as data property descriptors and accessor property descriptors based upon the existence or use of certain fields. A data property descriptor is one that includes any fields named either `[[Value]]`, or `[[Writable]]`. An accessor property descriptor is one that includes any fields named either `[[Get]]`, or `[[Set]]`. Any property descriptor may have fields named `[[Enumerable]]`, and `[[Configurable]]`. A Property Descriptor value may not be both a data property descriptor and an accessor

Deleted: `<#>`If `Type(V)` is not Reference, throw a **ReferenceError** exception.
`<#>`Call `GetBase(V)`.
`<#>`If `Result(2)` is **null**, go to step 6.
`<#>`Call the `[[Put]]` method of `Result(2)`, passing `GetPropertyname(V)` for the property name and *W* for the value.
`<#>`Return.
`<#>`Call the `[[Put]]` method for the global object, passing `GetPropertyname(V)` for the property name and *W* for the value.
`<#>`Return.

Deleted: The internal List type is not a language data type. It is defined by this specification purely for expository purposes. An implementation of ECMAScript must behave as if it produced and operated upon List values in the manner described here. However, a value of the List type is used only as an intermediate result of expression evaluation and cannot be stored as the value of a variable or property.

Deleted: and

Deleted: The internal Completion type is not a language data type. It is defined by this specification purely for expository purposes. An implementation of ECMAScript must behave as if it produced and operated upon Completion values in the manner described here. However, a value of the Completion type is used only as an intermediate result of statement evaluation and cannot be stored as the value of a variable or property.

property descriptor however it may be neither. A generic property descriptor is a Property Descriptor value that is neither a data property descriptor nor an accessor property descriptor.

For notational convenience within this specification, an object literal-like syntax can be used to define a property descriptor value. For example, Property Descriptor {value: 42, writable: false, configurable: true} defines a data property descriptor. The order of listing field names is not significant. Any fields that are not explicitly listed are considered to be absent.

In specification text and algorithms, dot notation may be used to refer to a specific field of a Property Descriptor. For example, if *D* is a property descriptor then *D*.[[Value]] is short hand for “the field of *D* named *value*”.

The Property Identifier type is used to associate a property name with a Property Descriptor. Values of the Property Identifier type are pairs of the form (name, descriptor), where name is a string and descriptor is a Property Descriptor value.

The following abstract operations are used in this specification to operate upon Property Descriptor values :

8.10.1 IsAccessorDescriptor (Desc)

When the abstract operation IsAccessorDescriptor is called with property descriptor *Desc* the following steps are taken:

1. If *Desc* is **undefined**, then return **false**.
2. If both *Desc*.[[Get]] and *Desc*.[[Set]] are absent, then return **false**.
3. Return **true**.

8.10.2 IsDataDescriptor (Desc)

When the abstract operation IsDataDescriptor is called with property descriptor *Desc* the following steps are taken:

1. If *Desc* is **undefined**, then return **false**.
2. If both *Desc*.[[Value]] and *Desc*.[[Writable]] are absent, then return **false**.
3. Return **true**.

8.10.3 IsGenericDescriptor (Desc)

When the abstract operation IsGenericDescriptor is called with property descriptor *Desc* the following steps are taken:

1. If *Desc* is **undefined**, then return **false**.
2. If IsAccessorDescriptor(*Desc*) and IsDataDescriptor(*Desc*) are both **false**, then return **true**.
3. Return **false**.

8.10.4 FromPropertyDescriptor (Desc)

When the abstract operation FromPropertyDescriptor is called with property descriptor *Desc*, the following steps are taken:

The following algorithm assumes that *Desc* is a fully populated Property Descriptor, such as that returned from [[GetOwnProperty]].

1. If *Desc* is **undefined**, then return **undefined**.
2. Let *obj* be the result of creating a new object as if by the expression **new Object()** where **Object** is the standard built-in constructor with that name.
3. If IsDataDescriptor(*Desc*) is **true**, then
 - a. Call the [[Put]] method of *obj* with arguments “value” and *Desc*.[[Value]].
 - b. Call the [[Put]] method of *obj* with arguments “writable” and *Desc*.[[Writable]].
4. Else, IsAccessorDescriptor(*Desc*) must be **true**, so
 - a. Call the [[Put]] method of *obj* with arguments “get” and *Desc*.[[Get]].
 - b. Call the [[Put]] method of *obj* with arguments “set” and *Desc*.[[Set]].
5. Call the [[Put]] method of *obj* with arguments “enumerable” and *Desc*.[[Enumerable]].
6. Call the [[Put]] method of *obj* with arguments “configurable” and *Desc*.[[Configurable]].
7. Return *obj*.

Deleted: the following steps are taken:

8.10.5 ToPropertyDescriptor (Obj)

When the abstract operation ToPropertyDescriptor is called with object *Desc*, the following steps are taken:

1. If Type(*Obj*) is not Object throw a **TypeError** exception.
2. Let *desc* be the result of creating a new Property Descriptor that initially has no fields.
3. If the result of calling the `[[HasProperty]]` method of *Obj* with argument "enumerable" is **true**, then
 - a. Let *enum* be the result of calling the `[[Get]]` method of *Obj* with "enumerable".
 - b. Set the `[[Enumerable]]` field of *desc* to ToBoolean(*enum*).
4. If the result of calling the `[[HasProperty]]` method of *Obj* with argument "configurable" is **true**, then
 - a. Let *conf* be the result of calling the `[[Get]]` method of *Obj* with argument "configurable".
 - b. Set the `[[Configurable]]` field of *desc* to ToBoolean(*conf*).
5. If the result of calling the `[[HasProperty]]` method of *Obj* with argument "value" is **true**, then
 - a. Let *value* be the result of calling the `[[Get]]` method of *Obj* with argument "value".
 - b. Set the `[[Value]]` field of *desc* to *value*.
6. If the result of calling the `[[HasProperty]]` method of *Obj* with argument "writable" is **true**, then
 - a. Let *writable* be the result of calling the `[[Get]]` method of *Obj* with argument "writable".
 - b. Set the `[[Writable]]` field of *desc* to ToBoolean(*writable*).
7. If the result of calling the `[[HasProperty]]` method of *Obj* with argument "get" is **true**, then
 - a. Let *getter* be the result of calling the `[[Get]]` method of *Obj* with argument "get".
 - b. If IsCallable(*getter*) is **false** and *getter* is not **undefined**, then throw a **TypeError** exception.
 - c. Set the `[[Get]]` field of *desc* to *getter*.
8. If the result of calling the `[[HasProperty]]` method of *Obj* with argument "set" is **true**, then
 - a. Let *setter* be the result of calling the `[[Get]]` method of *Obj* with argument "set".
 - b. If IsCallable(*setter*) is **false** and *setter* is not **undefined**, then throw a **TypeError** exception.
 - c. Set the `[[Set]]` field of *desc* to *setter*.
9. If either *desc*.`[[Get]]` or *desc*.`[[Set]]` are present, then
 - a. If either *desc*.`[[Value]]` or *desc*.`[[Writable]]` are present, then throw a **TypeError** exception.
10. Return *desc*.

8.11 The Lexical Environment and Environment Record Specification Types

The Lexical Environment and Environment Record types are used to explain the behaviour of name resolution in nested functions and blocks. These types and the operations upon them are defined in section 10.

8.12 Algorithms for Object Internal Methods

In the following algorithm descriptions, assume *O* is a native ECMAScript object, *P* is a string, *Desc* is a Property Description record, and *Throw* is a Boolean flag.

8.12.1 `[[GetOwnProperty]] (P)`

When the `[[GetOwnProperty]]` internal method of *O* is called with property name *P*, the following steps are taken:

1. If *O* doesn't have an own property with name *P*, return **undefined**.
2. Let *D* be a newly created Property Descriptor (Section 8.10) with no fields.
3. Let *X* be *O*'s own property named *P*.
4. If *X* is a data property, then
 - a. Set *D*.`[[Value]]` to the value of *X*'s `[[Value]]` attribute.
 - b. Set *D*.`[[Writable]]` to the value of *X*'s `[[Writable]]` attribute
5. Else *X* is an accessor property, so
 - a. Set *D*.`[[Get]]` to the value of *X*'s `[[Get]]` attribute.
 - b. Set *D*.`[[Set]]` to the value of *X*'s `[[Set]]` attribute.
6. Set *D*.`[[Enumerable]]` to the value of *X*'s `[[Enumerable]]` attribute.
7. Set *D*.`[[Configurable]]` to the value of *X*'s `[[Configurable]]` attribute.
8. Return *D*.

Note, however, that if *O* is a String object it has a more elaborate `[[GetOwnProperty]]` method (15.5.5.2).

8.12.2 `[[GetProperty]] (P)`

When the `[[GetProperty]]` internal method of *O* is called with property name *P*, the following steps are taken:

1. Let *prop* be the result of calling the `[[GetOwnProperty]]` internal method of *O* with property name *P*.
2. If *prop* is not **undefined**, return *prop*.
3. Let *proto* be the value of the `[[Prototype]]` internal property of *O*.
4. If the *proto* is **null**, return **undefined**.
5. Return the result of calling the `[[GetProperty]]` internal method of *proto* with argument *P*.

Deleted: Result(1)

Deleted: [[Prototype]] internal property of O

Deleted: Call

Deleted: [[Prototype]]

Deleted: property name

Deleted: <#>Return Result(4).¶

8.12.3 `[[Get]]` (P)

When the `[[Get]]` internal method of *O* is called with property name *P*, the following steps are taken:

1. Let *desc* be the result of calling the `[[GetProperty]]` internal method of *O* with property name *P*.
2. If *desc* is **undefined**, return **undefined**.
3. If `IsDataDescriptor(desc)` is **true**, return *desc*.[[Value]].
4. Otherwise, `IsAccessorDescriptor(desc)` must be true so, let *getter* be *desc*.[[Get]].
5. If *getter* is **undefined**, return **undefined**.
6. Return the result calling the `[[Call]]` internal method of *getter* providing *O* as the **this** value and providing no arguments.

8.12.4 `[[CanPut]]` (P)

When the `[[CanPut]]` internal method of *O* is called with property name *P*, the following steps are taken:

1. Let *desc* be the result of calling the `[[GetOwnProperty]]` internal method of *O* with argument *P*.
2. If *desc* is not **undefined**, then
 - a. If `IsAccessorDescriptor(desc)` is **true**, then
 - i. If *desc*.[[Set]] is **undefined**, then return **false**.
 - ii. Else return **true**.
 - b. Else, *desc* must be a `DataDescriptor` so return the value of *desc*.[[Writable]].
3. Let *proto* be the internal `[[Prototype]]` internal property of *O*.
4. If *proto* is **null**, then return the value of the `[[Extensible]]` internal property of *O*.
5. Let *inherited* be the result of calling the `[[GetProperty]]` internal method of *proto* with property name *P*.
6. If *inherited* is **undefined**, return the value of the `[[Extensible]]` internal property of *O*.
7. If `IsAccessorDescriptor(inherited)` is **true**, then
 - a. If *inherited*.[[Set]] is **undefined**, then return **false**.
 - b. Else return **true**.
8. Else, *inherited* must be a `DataDescriptor`
 - a. If the `[[Extensible]]` internal property of *O* is **false**, return **false**.
 - b. Else return the value of *inherited*.[[Writable]].

NOTE

Host objects may define additional constraints upon `[[Put]]` operations. If possible, host objects should not allow `[[Put]]` operations in situations where this definition of `[[CanPut]]` returns false.

8.12.5 `[[ThrowingPut]]` (P, V, Throw)

When the `[[ThrowingPut]]` internal method of *O* is called with property *P*, value *V*, and boolean flag *Throw* the following steps are taken:

1. If the result of calling the `[[CanPut]]` internal method of *O* with argument *P* is **false**, then
 - a. If *Throw* is **true**, then throw a **TypeError** exception.
 - b. Else return.
2. Let *ownDesc* be the result of calling the `[[GetOwnProperty]]` method of *O* with argument *P*.
3. If `IsDataDescriptor(ownDesc)` is **true**, then
 - a. Let *valueDesc* be the `Property Descriptor` `{[[Value]]: V}`.
 - b. Call the `[[DefineOwnProperty]]` internal method of *O* passing *P*, *valueDesc*, and *Throw* as arguments.
 - c. Return.
4. Let *desc* be the result of calling the `[[GetProperty]]` internal method of *O* with argument *P*. This may be either an own or inherited accessor property descriptor or an inherited data property descriptor.
5. If `IsAccessorDescriptor(desc)` is **true**, then
 - a. Let *setter* be *desc*.[[Set]] which cannot be **undefined**.
 - b. Call the `[[Call]]` internal method of *setter* providing *O* as the **this** value and providing *V* as the sole argument.

Deleted: Set the [[Value]] attribute of property P of O to V

6. Else, create a named data property named *P* on object *O* as follows
 - a. Let *newDesc* be the Property Descriptor
 {[[Value]]: *V*, [[Writable]]: **true**, [[Enumerable]]: **true**, [[Configurable]]: **true**},
 - b. Call the [[DefineOwnProperty]] internal method of *O* passing *P*, *newDesc*, and *Throw* as arguments.
7. Return.

Deleted: whose attributes are:

Deleted: [[Value]]: *V*,
<#>[[Writable]]: true,
[[Enumerable]]: true,

Deleted: [[Configurable]]: true

Deleted: Note, however, that if *O* is an Array object, it has a more elaborate [[ThrowingPut]] method (15.4.5.1),

8.12.6 [[Put]] (*P*, *V*)

[[Put]] is primarily used in the specification of built-in methods. Algorithms that require explicit control over the handling of invalid property stores should call [[ThrowingPut]] directly.

When the [[Put]] internal method of *O* is called with property *P* and value *V*, the following steps are taken:

1. Call the [[ThrowingPut]] internal method of *O* with arguments *P*, *V*, and **false**.
2. Return.

8.12.7 [[HasProperty]] (*P*)

When the [[HasProperty]] internal method of *O* is called with property name *P*, the following steps are taken:

Let *desc* be the result of calling the [[GetProperty]] internal method of *O* with property name *P*.
If *desc* is **undefined**, then return **false**.
Else return **true**.

8.12.8 [[Delete]] (*P*, *Throw*)

When the [[Delete]] internal method of *O* is called with property name *P* and the boolean flag *Throw*, the following steps are taken:

1. Let *desc* be the result of calling the [[GetOwnProperty]] internal method of *O* with property name *P*.
2. If *desc* is **undefined**, then return **true**.
3. If *desc*.[[Configurable]] is **true**, then
 - a. Remove the own property with name *P* from *O*.
 - b. Return **true**.
4. Else if *Throw*, then throw a **TypeError** exception.
5. Return **false**.

8.12.9 [[DefaultValue]] (*hint*)

When the [[DefaultValue]] internal method of *O* is called with *hint* String, the following steps are taken:

1. Let *toString* be the result of calling the [[Get]] internal method of object *O* with argument "toString".
2. If **IsCallable**(*toString*) is **true** then,
3. Let *str* be the result of calling the [[Call]] internal method of *toString*, with *O* as the this value and an empty argument list.
4. If *str* is a primitive value, return *str*.
5. Let *valueOf* be the result of calling the [[Get]] internal method of object *O* with argument "valueOf".
6. If **IsCallable**(*valueOf*) is **true**, then,
 - a. Let *val* be the result of calling the [[Call]] internal method of *valueOf*, with *O* as the this value and an empty argument list.
7. If *val* is a primitive value, return *val*.
8. Throw a **TypeError** exception.

Deleted: *toString* is an object

Deleted: *valueOf* is an object

When the [[DefaultValue]] method of *O* is called with *hint* Number, the following steps are taken:

1. Let *valueOf* be the result of calling the [[Get]] internal method of object *O* with argument "valueOf".
2. If **IsCallable**(*valueOf*) is **true**, then,
 - a. Let *val* be the result of calling the [[Call]] internal method of *valueOf*, with *O* as the this value and an empty argument list.
 - b. If *val* is a primitive value, return *val*.
3. Let *toString* be the result of calling the [[Get]] internal method of object *O* with argument "toString".
4. If **IsCallable**(*toString*) is **true**, then,
 - a. Let *str* be the result of calling the [[Call]] internal method of *toString*, with *O* as the this value and an empty argument list.

Deleted: *valueOf* is an object

Deleted: *toString* is an object

b. If *str* is a primitive value, return *str*.

5. Throw a **TypeError** exception.

When the `[[DefaultValue]]` internal method of *O* is called with no hint, then it behaves as if the hint were Number, unless *O* is a Date object (see 15.9), in which case it behaves as if the hint were String.

The above specification of `[[DefaultValue]]` for native objects can return only primitive values. If a host object implements its own `[[DefaultValue]]` method, it must ensure that its `[[DefaultValue]]` method can return only primitive values.

8.12.10 `[[DefineOwnProperty]]` (*P*, *Desc*, *Throw*)

In the following algorithm, the term “Reject” means “If *Throw* is **true**, then throw a **TypeError** exception, otherwise return **false**.”

When the `[[DefineOwnProperty]]` internal method of *O* is called with property name *P*, property descriptor *Desc*, and boolean flag *Throw*, the following steps are taken:

1. Let *current* be the result of calling the `[[GetProperty]]` internal method of *O* with property name *P*.
2. Let *extensible* be the value of the `[[Extensible]]` internal property of *O*.
3. If *current* is **undefined** and *extensible* is **false**, then Reject.
4. If *current* is **undefined** and *extensible* is **true**, then
 - a. If `IsGenericDescriptor(Desc)` or `IsDataDescriptor(Desc)` is **true**, then
 - i. Create an own data property named *P* of object *O* whose `[[Value]]`, `[[Writable]]`, `[[Enumerable]]` and `[[Configurable]]` attribute values are described by *Desc*. If the value of an attribute field of *Desc* is absent, the attribute of the newly created property is set to its default value.
 - b. Else, *Desc* must be an accessor Property Descriptor so,
 - i. Create an own accessor property named *P* of object *O* whose `[[Get]]`, `[[Set]]`, `[[Enumerable]]` and `[[Configurable]]` attribute values are described by *Desc*. If the value of an attribute field of *Desc* is absent, the attribute of the newly created property is set to its default value.
 - c. Return **true**.
5. Return, if every field in *Desc* is absent.
6. Return, if every field in *Desc* also occurs in *current* and the value of every field in *Desc* is the same value as the corresponding field in *current*.
7. If the `[[Configurable]]` field of *current* is **false** then
 - a. Reject, if the `[[Configurable]]` field of *Desc* is **true**.
 - b. Reject, if the `[[Enumerable]]` field of *current* and *Desc* are the Boolean negation of each other.
8. If `IsGenericDescriptor(Desc)` is **true**, then no further validation is required.
9. Else, if `IsDataDescriptor(current)` and `IsDataDescriptor(Desc)` have different results, then
 - a. Reject, if the `[[Configurable]]` field of *current* is **false**.
 - b. If `IsDataDescriptor(current)` is **true**, then
 - i. Convert the property named *P* of object *O* from a data property to an accessor property. Preserve the existing values of the converted property's `[[Configurable]]` and `[[Enumerable]]` attributes and set the rest of the property's attributes to their default values.
 - c. Else,
 - i. Convert the property named *P* of object *O* from an accessor property to a data property. Preserve the existing values of the converted property's `[[Configurable]]` and `[[Enumerable]]` attributes and set the rest of the property's attributes to their default values.
10. Else, if `IsDataDescriptor(current)` and `IsDataDescriptor(Desc)` are both **true**, then
 - a. If the `[[Configurable]]` field of *current* is **false**, then
 - i. Reject, if the `[[Writable]]` field of *current* is **false** and the `[[Writable]]` field of *Desc* is **true**.
 - ii. If the `[[Writable]]` field of *current* is **false**, then
 1. Reject, if the `[[Value]]` field of *Desc* is present and `SameValue(Desc.[[Value]], current.[[Value]])` is **false**.
 - b. else, the `[[Configurable]]` field of *current* is **true**, so any change is acceptable.

11. Else, `IsAccessorDescriptor(current)` and `IsAccessorDescriptor(Desc)` are both **true** so,
 - a. If the `[[Configurable]]` field of `current` is **false**, then
 - i. Reject, if the `[[Set]]` field of `Desc` is present and `SameValue(Desc.[[Set]], current.[[Set]]` is **false**.
 - ii. Reject, if the `[[Get]]` field of `Desc` is present and `SameValue(Desc.[[Get]], current.[[Get]]` is **false**.
12. For each attribute field of `Desc` that is present, set the correspondingly named attribute of the property named `P` of object `O` to the value of the field.
13. Return **true**.

Note, however, that if `O` is an Array object, it has a more elaborate `[[DefineOwnProperty]]` method (15.4.5.1).

9 Type Conversion and Testing

The ECMAScript runtime system performs automatic type conversion as needed. To clarify the semantics of certain constructs it is useful to define a set of conversion **abstract operations**. These **abstract operations** are not a part of the language; they are defined here to aid the specification of the semantics of the language. The conversion **abstract operations** are polymorphic; that is, they can accept a value of any **ECMAScript language** type, but not of **specification types**.

Deleted: operators

Deleted: operators

Deleted: operators

Deleted: standard

Deleted: type Reference, List, or Completion (the internal types)

Deleted: operator

Deleted: operator

9.1 ToPrimitive

The **abstract operation** `ToPrimitive` takes a Value argument and an optional argument `PreferredType`. The **abstract operation** `ToPrimitive` converts its value argument to a non-Object type. If an object is capable of converting to more than one primitive type, it may use the optional hint `PreferredType` to favour that type. Conversion occurs according to the following table:

Input Type	Result
Undefined	The result equals the input argument (no conversion).
Null	The result equals the input argument (no conversion).
Boolean	The result equals the input argument (no conversion).
Number	The result equals the input argument (no conversion).
String	The result equals the input argument (no conversion).
Object	Return a default value for the Object. The default value of an object is retrieved by calling the internal <code>[[DefaultValue]]</code> method of the object, passing the optional hint <code>PreferredType</code> . The behaviour of the <code>[[DefaultValue]]</code> method is defined by this specification for all native ECMAScript objects (8.12.9).

Deleted: 8.6.2.6

9.2 ToBoolean

The **abstract operation** `ToBoolean` converts its argument to a value of type Boolean according to the following table:

Deleted: operator

Input Type	Result
Undefined	false
Null	false
Boolean	The result equals the input argument (no conversion).
Number	The result is false if the argument is <code>+0</code> , <code>-0</code> , or <code>NaN</code> ; otherwise the result is true .
String	The result is false if the argument is the empty string (its length is zero); otherwise the result is true .
Object	true

9.3 ToNumber

The abstract operation ToNumber converts its argument to a value of type Number according to the following table:

Deleted: operator

Input Type	Result
Undefined	NaN
Null	+0
Boolean	The result is 1 if the argument is true . The result is +0 if the argument is false .
Number	The result equals the input argument (no conversion).
String	See grammar and note below.
Object	Apply the following steps: 1. <u>Let primValue be</u> ToPrimitive(input argument, hint Number). 2. <u>Return</u> ToNumber(primValue).

Deleted: Call

Deleted: Call

Deleted: Result(1)

Deleted: ¶
Return Result(2).

9.3.1 ToNumber Applied to the String Type

ToNumber applied to strings applies the following grammar to the input string. If the grammar cannot interpret the string as an expansion of *StringNumericLiteral*, then the result of ToNumber is NaN.

StringNumericLiteral :::
*StrWhiteSpace*_{opt}
*StrWhiteSpace*_{opt} *StrNumericLiteral* *StrWhiteSpace*_{opt}

StrWhiteSpace :::
StrWhiteSpaceChar *StrWhiteSpace*_{opt}

StrWhiteSpaceChar :::
WhiteSpace
Line Terminator

StrNumericLiteral :::
StrDecimalLiteral
HexIntegerLiteral

StrDecimalLiteral :::
StrUnsignedDecimalLiteral
+ *StrUnsignedDecimalLiteral*
- *StrUnsignedDecimalLiteral*

StrUnsignedDecimalLiteral :::
Infinity
DecimalDigits . *DecimalDigits*_{opt} *ExponentPart*_{opt}
. *DecimalDigits* *ExponentPart*_{opt}
DecimalDigits *ExponentPart*_{opt}

DecimalDigits :::
DecimalDigit
DecimalDigits *DecimalDigit*

DecimalDigit ::: one of
0 1 2 3 4 5 6 7 8 9

ExponentPart :::
ExponentIndicator *SignedInteger*

Deleted: <TAB>
<SP>
<NBSP>
<FF>
<VT>
<CR>
<LF>
<LS>
<PS>

Deleted: <USP>

ExponentIndicator ::: one of
e E

SignedInteger :::
DecimalDigits
+ DecimalDigits
- DecimalDigits

HexIntegerLiteral :::
0x HexDigit
0X HexDigit
HexIntegerLiteral HexDigit

HexDigit ::: one of
0 1 2 3 4 5 6 7 8 9 a b c d e f A B C D E F

Some differences should be noted between the syntax of a *StringNumericLiteral* and a *NumericLiteral* (see 7.8.3):

- A *StringNumericLiteral* may be preceded and/or followed by white space and/or line terminators.
- A *StringNumericLiteral* that is decimal may have any number of leading 0 digits.
- A *StringNumericLiteral* that is decimal may be preceded by + or - to indicate its sign.
- A *StringNumericLiteral* that is empty or contains only white space is converted to +0.

The conversion of a string to a number value is similar overall to the determination of the number value for a numeric literal (see 7.8.3), but some of the details are different, so the process for converting a string numeric literal to a value of Number type is given here in full. This value is determined in two steps: first, a mathematical value (MV) is derived from the string numeric literal; second, this mathematical value is rounded as described below.

- The MV of *StringNumericLiteral* ::: [empty] is 0.
- The MV of *StringNumericLiteral* ::: *StrWhiteSpace* is 0.
- The MV of *StringNumericLiteral* ::: *StrWhiteSpace_{opt} StrNumericLiteral StrWhiteSpace_{opt}* is the MV of *StrNumericLiteral*, no matter whether white space is present or not.
- The MV of *StrNumericLiteral* ::: *StrDecimalLiteral* is the MV of *StrDecimalLiteral*.
- The MV of *StrNumericLiteral* ::: *HexIntegerLiteral* is the MV of *HexIntegerLiteral*.
- The MV of *StrDecimalLiteral* ::: *StrUnsignedDecimalLiteral* is the MV of *StrUnsignedDecimalLiteral*.
- The MV of *StrDecimalLiteral* ::: + *StrUnsignedDecimalLiteral* is the MV of *StrUnsignedDecimalLiteral*.
- The MV of *StrDecimalLiteral* ::: - *StrUnsignedDecimalLiteral* is the negative of the MV of *StrUnsignedDecimalLiteral*. (Note that if the MV of *StrUnsignedDecimalLiteral* is 0, the negative of this MV is also 0. The rounding rule described below handles the conversion of this sign less mathematical zero to a floating-point +0 or -0 as appropriate.)
- The MV of *StrUnsignedDecimalLiteral* ::: **Infinity** is 10^{10000} (a value so large that it will round to $+\infty$).
- The MV of *StrUnsignedDecimalLiteral* ::: *DecimalDigits* . is the MV of *DecimalDigits*.
- The MV of *StrUnsignedDecimalLiteral* ::: *DecimalDigits* . *DecimalDigits* is the MV of the first *DecimalDigits* plus (the MV of the second *DecimalDigits* times 10^{-n}), where *n* is the number of characters in the second *DecimalDigits*.
- The MV of *StrUnsignedDecimalLiteral* ::: *DecimalDigits* . *ExponentPart* is the MV of *DecimalDigits* times 10^e , where *e* is the MV of *ExponentPart*.
- The MV of *StrUnsignedDecimalLiteral* ::: *DecimalDigits* . *DecimalDigits* *ExponentPart* is (the MV of the first *DecimalDigits* plus (the MV of the second *DecimalDigits* times 10^{-n})) times 10^e , where *n* is the number of characters in the second *DecimalDigits* and *e* is the MV of *ExponentPart*.
- The MV of *StrUnsignedDecimalLiteral* ::: . *DecimalDigits* is the MV of *DecimalDigits* times 10^{-n} , where *n* is the number of characters in *DecimalDigits*.

- The MV of *StrUnsignedDecimalLiteral*::. *DecimalDigits ExponentPart* is the MV of *DecimalDigits* times 10^{-n} , where *n* is the number of characters in *DecimalDigits* and *e* is the MV of *ExponentPart*.
- The MV of *StrUnsignedDecimalLiteral*::: *DecimalDigits* is the MV of *DecimalDigits*.
- The MV of *StrUnsignedDecimalLiteral*::: *DecimalDigits ExponentPart* is the MV of *DecimalDigits* times 10^e , where *e* is the MV of *ExponentPart*.
- The MV of *DecimalDigits* ::: *DecimalDigit* is the MV of *DecimalDigit*.
- The MV of *DecimalDigits* ::: *DecimalDigits DecimalDigit* is (the MV of *DecimalDigits* times 10) plus the MV of *DecimalDigit*.
- The MV of *ExponentPart* ::: *ExponentIndicator SignedInteger* is the MV of *SignedInteger*.
- The MV of *SignedInteger* ::: *DecimalDigits* is the MV of *DecimalDigits*.
- The MV of *SignedInteger* ::: + *DecimalDigits* is the MV of *DecimalDigits*.
- The MV of *SignedInteger* ::: - *DecimalDigits* is the negative of the MV of *DecimalDigits*.
- The MV of *DecimalDigit* ::: 0 or of *HexDigit* ::: 0 is 0.
- The MV of *DecimalDigit* ::: 1 or of *HexDigit* ::: 1 is 1.
- The MV of *DecimalDigit* ::: 2 or of *HexDigit* ::: 2 is 2.
- The MV of *DecimalDigit* ::: 3 or of *HexDigit* ::: 3 is 3.
- The MV of *DecimalDigit* ::: 4 or of *HexDigit* ::: 4 is 4.
- The MV of *DecimalDigit* ::: 5 or of *HexDigit* ::: 5 is 5.
- The MV of *DecimalDigit* ::: 6 or of *HexDigit* ::: 6 is 6.
- The MV of *DecimalDigit* ::: 7 or of *HexDigit* ::: 7 is 7.
- The MV of *DecimalDigit* ::: 8 or of *HexDigit* ::: 8 is 8.
- The MV of *DecimalDigit* ::: 9 or of *HexDigit* ::: 9 is 9.
- The MV of *HexDigit* ::: a or of *HexDigit* ::: A is 10.
- The MV of *HexDigit* ::: b or of *HexDigit* ::: B is 11.
- The MV of *HexDigit* ::: c or of *HexDigit* ::: C is 12.
- The MV of *HexDigit* ::: d or of *HexDigit* ::: D is 13.
- The MV of *HexDigit* ::: e or of *HexDigit* ::: E is 14.
- The MV of *HexDigit* ::: f or of *HexDigit* ::: F is 15.
- The MV of *HexIntegerLiteral* ::: 0x *HexDigit* is the MV of *HexDigit*.
- The MV of *HexIntegerLiteral* ::: 0X *HexDigit* is the MV of *HexDigit*.
- The MV of *HexIntegerLiteral* ::: *HexIntegerLiteral HexDigit* is (the MV of *HexIntegerLiteral* times 16) plus the MV of *HexDigit*.

Once the exact MV for a string numeric literal has been determined, it is then rounded to a value of the Number type. If the MV is 0, then the rounded value is +0 unless the first non white space character in the string numeric literal is '-', in which case the rounded value is -0. Otherwise, the rounded value must be the number value for the MV (in the sense defined in 8.5), unless the literal includes a *StrUnsignedDecimalLiteral* and the literal has more than 20 significant digits, in which case the number value may be either the number value for the MV of a literal produced by replacing each significant digit after the 20th with a 0 digit or the number value for the MV of a literal produced by replacing each significant digit after the 20th with a 0 digit and then incrementing the literal at the 20th digit position. A digit is *significant* if it is not part of an *ExponentPart* and

it is not 0; or

there is a nonzero digit to its left and there is a nonzero digit, not in the *ExponentPart*, to its right.

9.4 ToInteger

The [abstract operation](#) ToInteger converts its argument to an integral numeric value. This [abstract operation](#) functions as follows:

1. [Let number be the result of calling](#) ToNumber on the input argument.
2. If *number* is NaN, return +0.
3. If *number* is +0, -0, +∞, or -∞, return *number*.
4. [Return the result of computing](#) sign(*number*) * floor(abs(*number*)).

Deleted: operator
Deleted: operator
Deleted: Call
Deleted: Result(1)
Deleted: Result(1)
Deleted: Result(1)
Deleted: Compute
Deleted: Result(1)
Deleted: Result(1)
Deleted: ¶ <#>Return Result(4).¶

9.5 ToInt32: (Signed 32 Bit Integer)

The **abstract operation** ToInt32 converts its argument to one of 2^{32} integer values in the range -2^{31} through $2^{31}-1$, inclusive. This **abstract operation** functions as follows:

1. Let *number* be the result of calling ToNumber on the input argument.
2. If *number* is NaN, +0, -0, +∞, or -∞, return +0.
3. Let *posInt* be $\text{sign}(\text{number}) * \text{floor}(\text{abs}(\text{number}))$.
4. Let *int32bit* be *posInt* modulo 2^{32} ; that is, a finite integer value *k* of Number type with positive sign and less than 2^{32} in magnitude such that the mathematical difference of *posInt* and *k* is mathematically an integer multiple of 2^{32} .
5. If *int32bit* is greater than or equal to 2^{31} , return $\text{int32bit} - 2^{32}$, otherwise return *int32bit*.

NOTE

Given the above definition of ToInt32:

The ToInt32 **abstract operation** is idempotent: if applied to a result that it produced, the second application leaves that value unchanged.

ToInt32(ToInt32(*x*)) is equal to ToInt32(*x*) for all values of *x*. (It is to preserve this latter property that +∞ and -∞ are mapped to +0.)

ToInt32 maps -0 to +0.

9.6 ToUint32: (Unsigned 32 Bit Integer)

The **abstract operation** ToUint32 converts its argument to one of 2^{32} integer values in the range 0 through $2^{32}-1$, inclusive. This **abstraction** operator functions as follows:

1. Let *number* be the result of calling ToNumber on the input argument.
2. If *number* is NaN, +0, -0, +∞, or -∞, return +0.
3. Let *posInt* be $\text{sign}(\text{number}) * \text{floor}(\text{abs}(\text{number}))$.
4. Let *int32bit* be *posInt* modulo 2^{32} ; that is, a finite integer value *k* of Number type with positive sign and less than 2^{32} in magnitude such that the mathematical difference of *posInt* and *k* is mathematically an integer multiple of 2^{32} .
5. Return *int32bit*.

NOTE

Given the above definition of ToUint32:

Step 5 is the only difference between ToUint32 and ToInt32.

The ToUint32 **abstract operation** is idempotent: if applied to a result that it produced, the second application leaves that value unchanged.

ToUint32(ToInt32(*x*)) is equal to ToUint32(*x*) for all values of *x*. (It is to preserve this latter property that +∞ and -∞ are mapped to +0.)

ToUint32 maps -0 to +0.

9.7 ToUint16: (Unsigned 16 Bit Integer)

The **abstract operation** ToUint16 converts its argument to one of 2^{16} integer values in the range 0 through $2^{16}-1$, inclusive. This **abstract operation** functions as follows:

1. Let *number* be the result of calling ToNumber on the input argument.
2. If Result(1) is NaN, +0, -0, +∞, or -∞, return +0.
3. Let *posInt* be $\text{sign}(\text{number}) * \text{floor}(\text{abs}(\text{number}))$.
4. Let *int16bit* be *posInt* modulo 2^{16} ; that is, a finite integer value *k* of Number type with positive sign and less than 2^{16} in magnitude such the mathematical difference of *posInt* and *k* is mathematically an integer multiple of 2^{16} .
5. Return *int16bit*.

NOTE

Given the above definition of ToUint16:

The substitution of 2^{16} for 2^{32} in step 4 is the only difference between ToUint32 and ToUint16.

Deleted: operator

Deleted: operator

Deleted: Call

Deleted: Result(1)

Deleted: Compute

Deleted: Result(1)

Deleted: Result(1)

Deleted: Compute

Deleted: Result(3)

Deleted: Result(3)

Deleted: Result(4)

Deleted: Result(4)

Deleted: Result(4)

Deleted: operator

Deleted: Call

Deleted: Result(1)

Deleted: Compute

Deleted: Result(1)

Deleted: Result(1)

Deleted: Compute

Deleted: Result(3)

Deleted: Result(3)

Deleted: Result(4)

Deleted: ¶

Deleted: operator

Deleted: operator

Deleted: Call

Deleted: Compute

Deleted: Result(1)

Deleted: Result(1)

Deleted: Compute

Deleted: Result(3)

Deleted: Result(3)

Deleted: Result(4)

ToUint16 maps -0 to +0.

9.8 ToString

The **abstract operation** ToString converts its argument to a value of type String according to the following table:

Deleted: operator

Input Type	Result
Undefined	"undefined"
Null	"null"
Boolean	If the argument is true , then the result is " true ". If the argument is false , then the result is " false ".
Number	See note below.
String	Return the input argument (no conversion)
Object	Apply the following steps: 1. Let <i>primValue</i> be ToPrimitive(input argument, hint String). 2. Return ToString(<i>primValue</i>).

Deleted: Call

Deleted: Call

Deleted: Result(1)

Deleted: ¶

3. Return Result(2).

Deleted: operator

9.8.1 ToString Applied to the Number Type

The **abstract operation** ToString converts a number *m* to string format as follows:

1. If *m* is NaN, return the string "NaN".
2. If *m* is +0 or -0, return the string "0".
3. If *m* is less than zero, return the string concatenation of the string "-" and ToString(-*m*).
4. If *m* is infinity, return the string "Infinity".
5. Otherwise, let *n*, *k*, and *s* be integers such that $k \geq 1$, $10^{k-1} \leq s < 10^k$, the number value for $s \times 10^{n-k}$ is *m*, and *k* is as small as possible. Note that *k* is the number of digits in the decimal representation of *s*, that *s* is not divisible by 10, and that the least significant digit of *s* is not necessarily uniquely determined by these criteria.
6. If $k \leq n \leq 21$, return the string consisting of the *k* digits of the decimal representation of *s* (in order, with no leading zeroes), followed by *n-k* occurrences of the character '0'.
7. If $0 < n \leq 21$, return the string consisting of the most significant *n* digits of the decimal representation of *s*, followed by a decimal point '.', followed by the remaining *k-n* digits of the decimal representation of *s*.
8. If $-6 < n \leq 0$, return the string consisting of the character '0', followed by a decimal point '.', followed by -*n* occurrences of the character '0', followed by the *k* digits of the decimal representation of *s*.
9. Otherwise, if *k* = 1, return the string consisting of the single digit of *s*, followed by lowercase character 'e', followed by a plus sign '+' or minus sign '-' according to whether *n-1* is positive or negative, followed by the decimal representation of the integer abs(*n-1*) (with no leading zeros).
10. Return the string consisting of the most significant digit of the decimal representation of *s*, followed by a decimal point '.', followed by the remaining *k-1* digits of the decimal representation of *s*, followed by the lowercase character 'e', followed by a plus sign '+' or minus sign '-' according to whether *n-1* is positive or negative, followed by the decimal representation of the integer abs(*n-1*) (with no leading zeros).

Deleted: ar

NOTE

The following observations may be useful as guidelines for implementations, but are not part of the normative requirements of this Standard:

If *x* is any number value other than -0, then ToNumber(ToString(*x*)) is exactly the same number value as *x*.

The least significant digit of *s* is not always uniquely determined by the requirements listed in step 5.

For implementations that provide more accurate conversions than required by the rules above, it is recommended that the following alternative version of step 5 be used as a guideline:

Otherwise, let n , k , and s be integers such that $k \geq 1$, $10^{k-1} \leq s < 10^k$, the number value for $s \times 10^{n-k}$ is m , and k is as small as possible. If there are multiple possibilities for s , choose the value of s for which $s \times 10^{n-k}$ is closest in value to m . If there are two such possible values of s , choose the one that is even. Note that k is the number of digits in the decimal representation of s and that s is not divisible by 10.

Implementors of ECMAScript may find useful the paper and code written by David M. Gay for binary-to-decimal conversion of floating-point numbers:

Gay, David M. *Correctly Rounded Binary-Decimal and Decimal-Binary Conversions*. Numerical Analysis Manuscript 90-10. AT&T Bell Laboratories (Murray Hill, New Jersey). November 30, 1990. Available as <http://cm.bell-labs.com/cm/cs/doc/90/4-10.ps.gz>. Associated code available as <http://cm.bell-labs.com/netlib/fp/dtoa.c.gz> and [as](http://cm.bell-labs.com/netlib/fp/g_fmt.c.gz) http://cm.bell-labs.com/netlib/fp/g_fmt.c.gz and may also be found at the various `netlib` mirror sites.

Deleted: as

9.9 ToObject

The abstract operation `ToObject` converts its argument to a value of type `Object` according to the following table:

Deleted: operator

Input Type	Result
Undefined	Throw a TypeError exception.
Null	Throw a TypeError exception.
Boolean	Create a new Boolean object whose <code>[[PrimitiveValue]]</code> property is set to the value of the boolean. See 15.6 for a description of Boolean objects.
Number	Create a new Number object whose <code>[[PrimitiveValue]]</code> property is set to the value of the number. See 15.7 for a description of Number objects.
String	Create a new String object whose <code>[[PrimitiveValue]]</code> property is set to the value of the string. See 15.5 for a description of String objects.
Object	The result is the input argument (no conversion).

Deleted: value

Deleted: value

Deleted: value

9.10 CheckObjectCoercible

The abstract operation `CheckObjectCoercible` throws an error if its argument is a value that can not be converted to an Object using `ToObject`. It is defined by the following table:

Input Type	Result
Undefined	Throw a TypeError exception.
Null	Throw a TypeError exception.
Boolean	Return
Number	Return
String	Return
Object	Return

9.11 IsCallable

The abstract operation `IsCallable` determines if its argument, which must be an ECMAScript language value, is a callable function Object according to the following table:

Input Type	Result
Undefined	Return false .
Null	Return false .
Boolean	Return false .
Number	Return false .
String	Return false .
Object	If the argument object has an internal <code>[[Call]]</code> method, then return true , otherwise return false .

9.12 The SameValue Algorithm

The internal comparison abstract operation SameValue(*x*, *y*), where *x* and *y* are ECMAScript language values, produces **true** or **false**. Such a comparison is performed as follows:

1. If Type(*x*) is different from Type(*y*), return **false**.
2. If Type(*x*) is Undefined, return **true**.
3. If Type(*x*) is Null, return **true**.
4. If Type(*x*) is Number, then:
 - a. If *x* is NaN and *y* is NaN, return **true**.
 - b. If *x* is +0 and *y* is -0, return **false**.
 - c. If *x* is -0 and *y* is +0, return **false**.
 - d. If *x* is the same number value as *y*, return **true**.
 - e. Return **false**.
5. If Type(*x*) is String, then return **true** if *x* and *y* are exactly the same sequence of characters (same length and same characters in corresponding positions); otherwise, return **false**.
6. If Type(*x*) is Boolean, return **true** if *x* and *y* are both **true** or both **false**; otherwise, return **false**.
7. Return true if *x* and *y* refer to the same object. Otherwise, return **false**.

10 Executable Code and Execution Contexts

10.1 Types of Executable Code

There are three types of ECMAScript executable code:

Global code is source text that is treated as an ECMAScript *Program*. The global code of a particular *Program* does not include any source text that is parsed as part of a *FunctionBody*.

Eval code is the source text supplied to the built-in **eval** function. More precisely, if the parameter to the built-in **eval** function is a string, it is treated as an ECMAScript *Program*. The eval code for a particular invocation of **eval** is the global code portion of that *Program*.

Function code is source text that is parsed as part of a *FunctionBody*. The *function code* of a particular *FunctionBody* does not include any source text that is parsed as part of a nested *FunctionBody*. *Function code* also denotes the source text supplied when using the built-in **Function** object as a constructor. More precisely, the last parameter provided to the **Function** constructor is converted to a string and treated as the *FunctionBody*. If more than one parameter is provided to the **Function** constructor, all parameters except the last one are converted to strings and concatenated together, separated by commas. The resulting string is interpreted as the *FormalParameterList* for the *FunctionBody* defined by the last parameter. The function code for a particular instantiation of a **Function** does not include any source text that is parsed as part of a nested *FunctionBody*.

Deleted: the string parameter

10.1.1 Strict Mode Code

As described in section 4.2.2, an ECMAScript *Program* syntactic unit may be processed using either unrestricted or strict mode syntax and semantics. When processed using strict mode the three types of ECMAScript code are referred to as strict global code, strict eval code, and strict function code. Code is interpreted in strict mode code in the following situations:

- Global code is strict global code if the *Program* that defines the global code includes a Use Strict Directive (14.1).
- Eval code is strict eval code if it is a *Program* that includes a Use Strict Directive (14.1) or if the call to **eval** is a direct call (see section 15.1.2.1.1) to the eval function that is contained in strict mode code.
- Function code that is part of a *FunctionDeclaration* or *FunctionExpression* is strict function code if its *FunctionDeclaration* or *FunctionExpression* is contained in strict mode code or if its *FunctionBody* includes a Use Strict Directive (14.1).
- Function code that is supplied as the last argument to the built-in **Function** constructor is strict function code if the last argument is a string that when processed as a *FunctionBody* includes a Use Strict Directive (14.1).

Deleted: the

Deleted: defines the eval code

10.2 Lexical Environments

A *Lexical Environment* is a specification type used to define the association of *Identifiers* to specific variables and functions based upon the lexical nesting structure of ECMAScript code. A Lexical Environment consists of an Environment Record and a possibly null reference to an *outer* Lexical Environment. Usually a Lexical Environment is associated with some specific syntactic structure of ECMAScript code such as a *FunctionDeclaration*, a *WithStatement*, or a *catch* clause of a *TryStatement* and a new Lexical Environment is created each time such code is evaluated.

An *Environment Record* records the identifier bindings that are created within the scope of its associated Lexical Environment.

The outer environment reference is used to model the logical nesting of Lexical Environment values. The outer reference of a (inner) Lexical Environment is a reference to the Lexical Environment that logically surrounds the inner Lexical Environment. An outer Lexical Environment may, of course, have its own outer Lexical Environment. A Lexical Environment may serve as the outer environment for multiple inner Lexical Environments. For example, if a *FunctionDeclaration* contains two nested *FunctionDeclarations* then the Lexical Environments of each of the nested functions will have as their outer Lexical Environment the Lexical Environment of the current execution of the surrounding function.

Lexical Environments and Environment Record values are purely specification mechanisms and need not correspond to any specific artefact of an ECMAScript implementation. It is impossible for an ECMAScript program to directly access or manipulate such values.

Deleted: dynamic

Deleted: particular

10.2.1 Environment Records

There are two kinds of Environment Record values used in this specification: *declarative environment records* and *object environment records*. Declarative environment records are used to define the effect of ECMAScript language syntactic elements such as *FunctionDeclarations*, *VariableDeclarations*, and *Catch* clauses that directly associate **identifier** bindings with ECMAScript language values or variables. Object environment records are used to define the effect of ECMAScript elements such as *Program* and *WithStatement* that associate **identifier** bindings with the properties of some object.

For specification purposes Environment Record values can be thought of as existing in a simple object-oriented hierarchy where Environment Record is an abstract class with two concrete subclasses, declarative environment record and object environment record. The abstract class defines the following abstract specification methods that have distinct concrete algorithms for each of its subclasses:

Method	Purpose
HasBinding(N)	Determine if an environment record has a binding for an identifier. Return true if it does and false if it does not. The string value N is the text of the identifier.
CreateMutableBinding(N)	Create a new mutable binding in an environment record. The string value N is the text of the bound name.
GetBindingValue(N,S)	Returns the value of an already existing binding from an environment record. The string value N is the text of the bound name. If S is true and the binding is an uninitialized immutable binding throw a ReferenceError exception. S is used to identify strict mode references.
SetMutableBinding(N,V,S)	Set the value of an already existing mutable binding in an environment record. The string value N is the text of the bound name. V is the value for the binding and may be a value of any ECMAScript language type. S is a Boolean flag. If S is true and the binding cannot be set throw a TypeError exception. S is used to identify strict mode references.

10.2.1.1 Declarative Environment Records

Each declarative environment record is associated with a ECMAScript program scope containing variable, and/or function declarations. A declarative environment record binds the set of identifiers defined by the declarations contained within its scope.

Deleted: and or

In addition to the mutable binds supported by all Environment Records, declarative environment records also provide for immutable bindings. An immutable binding is one where the association

between an identifier and a value may not be modified once it has been established. Declarative environment records support the following methods in addition to the Environment Record abstract specification methods:

<i>Method</i>	<i>Purpose</i>
<u>CreateImmutableBinding(N)</u>	<u>Create a new but uninitialized immutable binding in an environment record. The string value N is the text of the bound name.</u>
<u>InitializeImmutableBinding(N,V)</u>	<u>Set the value of an already existing but uninitialized immutable binding in an environment record. The string value N is the text of the bound name. V is the value for the binding and is a value of any ECMAScript language type.</u>

The behaviour of the concrete specification methods for Declarative Environment Records are defined by the following algorithms.

10.2.1.1.1 HasBinding(N)

The concrete environment record method HasBinding for declarative environment records simply determines if the argument identifier is one of the identifiers bound by the record:

1. Let *envRec* be the declarative environment record for which the method was invoked.
2. If *envRec* has a binding for the name that is the value of *N*, return **true**.
3. If it does not have such a binding, return **false**.

10.2.1.1.2 CreateMutableBinding (N)

The concrete Environment Record method CreateMutableBinding for declarative environment records creates a new mutable binding for the name *N* that is initialized to the value **undefined**. A binding must not already exist in this Environment Record for *N*.

1. Let *envRec* be the declarative environment record for which the method was invoked.
2. Assert: *envRec* does not already have a binding for *N*.
3. Create a mutable binding in *envRec* for *N* and set its bound value to **undefined**.

10.2.1.1.3 SetMutableBinding (N,V,S)

The concrete Environment Record method SetMutableValue for declarative environment records attempts to change the bound value of the current binding of the identifier whose name is the value of the argument *N* to the value of argument *V*. A binding for *N* must already exist. If the binding is an immutable binding, a **TypeError** is always thrown. The *S* argument is ignored because strict mode does not change the meaning of setting bindings in declarative environment records have.

1. Let *envRec* be the declarative environment record for which the method was invoked.
2. Assert: *envRec* must have a binding for *N*.
3. If the binding for *N* in *envRec* is a mutable binding, change its bound value to *V*.
4. Else this must be an attempt to change the value of an immutable binding so throw a **TypeError** exception.

10.2.1.1.4 GetBindingValue(N,S)

The concrete Environment Record method GetBindingValue for declarative environment records simply returns the value of its bound identifier whose name is the value of the argument *N*. The binding must already exist. If *S* is **true** and the binding is an uninitialized immutable binding throw a **ReferenceError** exception.

1. Let *envRec* be the declarative environment record for which the method was invoked.
2. Assert: *envRec* has a binding for *N*.
3. If the binding for *N* in *envRec* is an uninitialized immutable binding, then
 - a. If *S* is **false**, return the value **undefined**, otherwise throw a **ReferenceError** exception.
4. Else, return the value currently bound to *N* in *envRec*.

10.2.1.1.5 CreateImmutableBinding (N)

The concrete Environment Record method `CreateImmutableBinding` for declarative environment records creates a new immutable binding for the name N that is initialized to the value `undefined`. A binding must not already exist in this environment record for N .

1. Let $envRec$ be the declarative environment record for which the method was invoked.
2. Assert: $envRec$ does not already have a binding for N .
3. Create an immutable binding in $envRec$ for N and record that it is uninitialized.

10.2.1.1.6 InitializeImmutableBinding (N,V)

The concrete Environment Record method `InitializeImmutableBinding` for declarative environment records is used to set the bound value of the current binding of the identifier whose name is the value of the argument N to the value of argument V . An uninitialized immutable binding for N must already exist.

1. Let $envRec$ be the declarative environment record for which the method was invoked.
2. Assert: $envRec$ must have an uninitialized immutable binding for N .
3. Set the bound value for N in $envRec$ to V .
4. Record that the immutable binding for N in $envRec$ has been initialized.

10.2.1.2 Object Environment Records

Each object environment record is associated with an object called its *binding object*. An environment record binds the set of identifiers that directly correspond to the property names of its binding object. Property names that are not identifiers are not included in the set of bound identifiers. Because properties can be dynamically added and deleted from objects, the set of identifiers bound by an object environment record may potentially change as a side-effect of any operation that adds or deletes properties. Any bindings that are created as a result of such a side-effect is considered to be a mutable binding even if the `Writable` attribute of the corresponding property has the value `false`. Immutable bindings do not exist for object environment records.

The behaviour of the concrete specification methods for Object Environment Records is defined by the following algorithms.

10.2.1.2.1 HasBinding(N)

The concrete Environment Record method `HasBinding` for object environment records determines if its associated binding object has a property whose name is the value of the argument N :

1. Let $envRec$ be the object environment record for which the method was invoked.
2. Let $bindings$ be the binding object for $envRec$.
3. Return the result of calling the `[[HasProperty]]` method of $bindings$, passing N as the property name.

10.2.1.2.2 CreateMutableBinding (N)

The concrete Environment Record method `CreateMutableBinding` for object environment records creates a property whose name is the string value N in the environment record and initializes it to the value `undefined`. A property named N must not already exist in the binding object.

1. Let $envRec$ be the declarative environment record for which the method was invoked.
2. Let $bindings$ be the binding object for $envRec$.
3. Assert: The result of calling the `[[HasProperty]]` method of $bindings$, passing N as the property name is `false`.
4. Call the `[[Put]]` method of $bindings$, passing N and `undefined` for the arguments.

10.2.1.2.3 SetMutableBinding (N,V,S)

The concrete Environment Record method `SetMutableValue` for object environment records attempts to set the value of the environment record's associated binding object's property whose name is the value of the argument N to the value of argument V . A property named N should already exist but if it does not or is not currently writable, error handling is determined by the value of the Boolean argument S .

1. Let $envRec$ be the object environment record for which the method was invoked.
2. Let $bindings$ be the binding object for $envRec$.

3. Call the `[[ThrowingPut]]` method of *bindings* with arguments *N*, *V*, and *S*.

10.2.1.2.4 GetBindingValue(N,S)

The concrete Environment Record method `GetBindingValue` for object environment records returns the value of its associated binding object's property whose name is the string value of the argument identifier *N*. The property should already exist but if it does not the result depends upon the value of *S* argument:

1. Let *envRec* be the object environment record for which the method was invoked.
2. Let *bindings* be the binding object for *envRec*.
3. Let *value* be the result of calling the `[[HasProperty]]` method of *bindings*, passing *N* as the property name.
4. If *value* is **false**, then
 - a. If *S* is **false**, return the value **undefined**, otherwise throw a **ReferenceError** exception.
5. Return the result of calling the `[[Get]]` method of *bindings*, passing *N* for the argument.

10.2.2 Lexical Environment Operations

The following abstract operations are used in this specification to operate upon lexical environments:

10.2.2.1 GetIdentifierReference (lex, name, strict)

The abstract operation `GetIdentifierReference` is called with a Lexical Environment *lex*, an identifier string *name*, and a boolean flag *strict*. The value of *lex* may be **null**. When called, the following steps are performed:

1. If *lex* is the value **null**, then
 - a. Return a value of type Reference whose base value is **null**, whose referenced name is *name*, and whose strict mode flag is *strict*.
2. Let *envRec* be *lex*'s environment record.
3. Let *exists* be the result of calling the `HasBinding(N)` concrete method of *envRec* passing *name* as the argument *N*.
4. If *exists* is **true**, then
 - a. Return a value of type Reference whose base value is *envRec*, whose referenced name is *name*, and whose strict mode flag is *strict*.
5. Else
 - a. Let *outer* be the value of *lex*'s outer environment reference.
 - b. Return the result of calling `GetIdentifierReference` passing *outer*, *name*, and *strict* as arguments.

10.2.2.2 NewDeclarativeEnvironmentRecord(E)

When the abstract operation `NewDeclarativeEnvironmentRecord` is called with either a Lexical Environment or **null** as argument *E* the following steps are performed:

1. Let *env* be a new Lexical Environment.
2. Let *envRec* be a new `DeclarativeEnvironmentRecord` containing no bindings.
3. Set *env*'s environment record to be *envRec*.
4. Set the outer lexical environment reference of *env* to *E*.
5. Return *env*.

10.2.2.3 NewObjectEnvironmentRecord(O, E)

When the abstract operation `NewObjectEnvironmentRecord` is called with an Object *O* and a Lexical Environment *E* (or **null**) as arguments, the following steps are performed:

1. Let *env* be a new Lexical Environment.
2. Let *envRec* be a new `ObjectEnvironmentRecord` containing using *O* as the binding object.
3. Set *env*'s environment record to be *envRec*.
4. Set the outer lexical environment reference of *env* to *E*.
5. Return *env*.

10.2.3 The Global Environment

The *global environment* is a unique Lexical Environment which is created before any ECMAScript code is executed. The *global environment's* Environment Record is an object environment record whose binding object is the global object (15.1). The *global environment's* outer environment reference is **null**.

As ECMAScript code is executed, additional properties may be added to the global object and the initial properties may be modified.

10.3 Execution Contexts

When control is transferred to ECMAScript executable code, control is entering an *execution context*. Active execution contexts logically form a stack. The top execution context on this logical stack is the running execution context. A new execution context is created whenever control is transferred from the executable code associated with the currently running execution context to executable code that is not associated with that execution context. The newly created execution context is pushed onto the stack and becomes the running execution context.

An execution context contains whatever state is necessary to track the execution progress of its associated code. In addition, each execution context has the following state components:

<i>Component</i>	<i>Purpose</i>
LexicalEnvironment	Identifies the Lexical Environment used to resolve identifier references made by code within this execution context.
VariableEnvironment	Identifies the Lexical Environment whose environment record holds bindings created by <i>VariableStatements</i> and <i>FunctionDeclarations</i> within this execution context.
ThisBinding	The value associated with the this keyword within ECMAScript code associated with this execution context.

Deleted: tract

Deleted: Environmnet

The LexicalEnvironment and VariableEnvironment components of an execution context are always Lexical Environments. When an execution context is created its LexicalEnvironment and VariableEnvironment components initially have the same value. The value of the VariableEnvironment component never changes while the value of the LexicalEnvironment component may change during execution of code within an execution context.

In most situations only the running execution context (the top of the execution context stack) is directly manipulated by algorithms within this specification. Hence when the terms “LexicalEnvironment”, “VariableEnvironment” and “ThisBinding” are used without qualification they are in reference to those components of the running execution context.

An execution context is purely a specification mechanism and need not correspond to any particular artefact of an ECMAScript implementation. It is impossible for an ECMAScript program to access an execution context.

10.3.1 Identifier Resolution

Identifier resolution is the process of determining the binding of an *Identifier* using the LexicalEnvironment of the running execution context. During execution of ECMAScript code, the syntactic production *PrimaryExpression* : *Identifier* is evaluated using the following algorithm:

1. Let *env* be the running execution context’s LexicalEnvironment.
2. If the syntactic production that is being evaluated is contained in a strict mode code, then let *strict* be **true** else let *strict* be **false**.
3. Return the result of calling GetIdentifierReference function passing *env*, *Identifier*, and *strict* as arguments.

The result of evaluating an identifier is always a value of type Reference with its referenced name component equal to the *Identifier* string.

10.4 Establishing an Execution Context

Evaluation of global code or code using the eval function (15.1.2.1) establishes and enters a new execution context. Every invocation of a ECMAScript code function (13.2.1) also establishes and enters a new execution context, even if a function is calling itself recursively. Every return exits an execution context. A thrown exception may also exit one or more execution contexts.

When control enters an execution context, the execution context’s ThisBinding is set, its VariableEnvironment and initial LexicalEnvironment are defined, and declaration binding instantiation is performed. The exact manner in which these actions occur depend on the type of code being entered.

10.4.1 Global Code

The following steps are performed when control enters the execution context for global code:

1. Initialize the execution context using the global code as described in 10.4.1.1.
2. Perform Declaration Binding Instantiation as described in 10.6 using the global code.

10.4.1.1 Initial Global Execution Context

The following steps are performed to initialize a global execution context for ECMAScript code *C*:

1. Set the VariableEnvironment to the Global Environment.
2. Set the LexicalEnvironment to the Global Environment.
3. Set the ThisBinding to the global object.

Deleted: an

Deleted: If *C* is strict code, set the ThisBinding to undefined, otherwise set

10.4.2 Eval Code

The following steps are performed when control enters the execution context for eval code:

1. If there is no calling context or if the eval code is not being evaluated by a direct call (15.1.2.1 .1) to the eval function then.
 - a. Initialize the execution context as if it was a global execution context using the eval code as *C* as described in 10.4.1.1.
2. Else.
 - a. Set the ThisBinding to the same value as the ThisBinding of the calling execution context.
 - b. Set the LexicalEnvironment to the same value as the LexicalEnvironment of the calling execution context.
 - c. Set the VariableEnvironment to the same value as the VariableEnvironment of the calling execution context.
3. If the eval code is strict code, then.
 - a. Let *strictVarEnv* be the result of calling NewDeclarativeEnvironmentRecord(*E*) passing the LexicalEnvironment as the argument.
 - b. Set the LexicalEnvironment to *strictVarEnv*.
 - c. Set the VariableEnvironment to *strictVarEnv*.
4. Perform Declaration Binding Instantiation as described in 10.6 using the eval code.

Deleted: sets

10.4.2.1 Strict Mode Restrictions

The eval code cannot instantiate variable or function bindings in the variable environment of the calling context that invoked the eval if either the code of the calling context or the eval code is strict code. Instead such bindings are instantiated in a new VariableEnvironment that is only accessible to the eval code.

10.4.3 Function Code

The following steps are performed when control enters the execution context for function code contained in function object *F*, a caller provided *thisArg*, and a caller provided *argumentsList*:

1. If the function code is strict code, set the ThisBinding to *thisArg*.
2. Else if *thisArg* is null or undefined, set the ThisBinding to the global object.
3. Else if *thisArg* is not an Object, set the ThisBinding to ToObject(*thisArg*).
4. Else set the ThisBinding to *thisArg*.
5. Let *localEnv* be the result of calling NewDeclarativeEnvironmentRecord(*E*) passing the value of the [[Scope]] property of *F* as the argument.
6. Set the LexicalEnvironment to *localEnv*.
7. Set the VariableEnvironment to *localEnv*.
8. Let *code* be the value of *F*'s [[Code]] internal property.
9. Perform Declaration Binding Instantiation using the function code *code* and *argumentList* as described in 10.6.

Deleted: sets

10.5 Arguments Object

When control enters an execution context for function code, an arguments may be object is created.

The arguments object is created by calling the abstract operation CreateArgumentsObject with arguments *func* the function object whose code is to be evaluated, *names* a List containing the function's formal parameter names, *args* the actual arguments passed to the [[Call]] method, *env* the variable environment for

Deleted: pass

the function code, and *strict* a Boolean that indicates whether or not the function code is strict code. When `CreateArgumentsObject` is called the following steps are performed:

1. Let *len* be the number of elements in *args*.
2. Let *obj* be the result of creating a new ECMAScript object.
3. Set the `[[Class]]` internal property of *obj* to **"Object"**.
4. Set the `[[Constructor]]` internal property of *obj* to the standard built-in Object constructor (15.2.3).
5. Set the `[[Prototype]]` internal property of *obj* to the standard built-in Array prototype object (15.4.4).
6. Call the `[[DefineOwnProperty]]` internal method on *obj* passing **"length"**, the Property Descriptor `{[[Value]]: len, [[Writable]]: true, [[Enumerable]]: false, [[Configurable]]: true}`, and **false** as arguments.
7. Let *map* be the result of creating a new object as if by the expression **new Object()** where **Object** is the standard built-in constructor with that name.
8. Let *mappedNames* be an empty List.
9. Let *indx* = *len* - 1.
10. Repeat while *indx* >= 0,
 - a. Let *val* be the element of *args* at 0-origin list position *indx*.
 - b. Call the `[[DefineOwnProperty]]` method on *obj* passing `ToString(indx)`, the property descriptor `{[[Value]]: val, [[Writable]]: true, [[Enumerable]]: true, [[Configurable]]: true}`, and **false** as arguments.
 - c. If *indx* is less than the number of elements in *names*, then
 - i. Let *name* be the element of *names* at 0-origin list position *indx*.
 - ii. If *strict* is **false** and *name* is not an element of *mappedNames*, then
 1. Add *name* as an element of the list *mappedNames*.
 2. Let *g* be the result of calling the *MakeArgGetter* function with arguments *name* and *env*.
 3. Let *p* be the result of calling the *MakeArgSetter* function with arguments *name* and *env*.
 4. Call the `[[DefineOwnProperty]]` internal method of *map* passing `ToString(indx)`, the Property Descriptor `{[[Set]]: p, [[Get]]: g, [[Configurable]]: true}`, and **false** as arguments.
 - d. Let *indx* = *indx* - 1.
11. If *mappedNames* is not empty, then
 - a. Set the `[[ParameterMap]]` internal property of *obj* to *map*.
 - b. Set the `[[Get]]`, `[[GetOwnProperty]]`, `[[DefineOwnProperty]]`, and `[[Delete]]` internal methods of *obj* to the definitions provided below.
12. If *strict* is **false**, then
 - a. Call the `[[DefineOwnProperty]]` method on *obj* passing **"callee"**, the property descriptor `{[[Value]]: func, [[Writable]]: true, [[Enumerable]]: false, [[Configurable]]: true}`, and **false** as arguments.
13. Else, *strict* is **true** so
 - a. Let *f* be a function which when evaluated throws a **TypeError** exception and performs no other actions.
 - b. Call the `[[DefineOwnProperty]]` internal method of *obj* passing **"callee"**, the Property Descriptor `{[[Get]]: f, [[Put]]: f, [[Enumerable]]: false, [[Configurable]]: false}`, and **true** as arguments.
 - c. Call the `[[DefineOwnProperty]]` internal method of *obj* passing **"caller"**, the Property Descriptor `{[[Get]]: f, [[Put]]: f, [[Enumerable]]: false, [[Configurable]]: false}`, and **true** as arguments.
14. Return *obj*.

The function *MakeArgGetter* called with string *name* and environment record *env* creates a function object that when executes returns the value bound for *name* in *env*. It performs the following steps:

1. Let *body* be the result of concatenating the Strings **"return "**, *name*, and **";"**
2. Return the result of creating a function object as described in 13.2 using no *FormalParameterList*, *body* for *FunctionBody*, *env* as *Scope*, and the empty string as *Name*.

The function *MakeArgSetter* called with string *name* and environment record *env* creates a function object that when executes returns the value bound for *name* in *env*. It performs the following steps:

Deleted: `[[ThrowingPut]]` .

Deleted: *m*

Deleted: *m*

Deleted: *m*

1. Let *param* be the string *name* concatenated with the String " arg"
2. Let *body* be the String "<name> = <param>:" with <name> replaced by the value of *name* and <param> replaced by the value of *param*.
3. Return the result of creating a function object as described in 13.2 using a List containing the single string *param* as *FormalParameterList*, *body* for *FunctionBody*, *env* as *Scope*, and the empty string as *Name*.

The `[[Get]]` internal method of an arguments object for a function with formal parameters when called with a property name *P* performs the following steps:

1. Let *map* be the value of the `[[ParameterMap]]` internal property of the arguments object.
2. Let *isMapped* be the result of calling the `[[GetOwnProperty]]` internal method of *map* passing *P* as the argument.
3. If the value of *isMapped* is **undefined**, then
 - a. Return the result of calling the default `[[Get]]` internal method (8.12.3) on the arguments object passing *P* as the argument.
4. Else, *map* contains a formal parameter mapping for *P* so,
 - a. Return the result of calling the `[[Get]]` internal method of *map* passing *P* as the argument.

The `[[GetOwnProperty]]` internal method of an arguments object for a function with formal parameters when called with a property name *P* performs the following steps:

1. Let *desc* be the result of calling the default `[[GetOwnProperty]]` internal method (8.12.1) on the arguments object passing *P* as the argument.
2. If *desc* is **undefined** then return *desc*.
3. Let *map* be the value of the `[[ParameterMap]]` internal property of the arguments object.
4. Let *isMapped* be the result of calling the `[[GetOwnProperty]]` internal method of *map* passing *P* as the argument.
5. If the value of *isMapped* is not **undefined**, then
 - a. Set *desc*.[`Value`] to the result of calling the `[[Get]]` internal method of *map* passing *P* as the argument.
6. Return *desc*.

The `[[DefineOwnProperty]]` internal method of an arguments object for a function with formal parameters when called with a property name *P*, Property Descriptor *Desc*, and boolean flag *Throw* performs the following steps:

1. Let *map* be the value of the `[[ParameterMap]]` internal property of the arguments object.
2. Let *isMapped* be the result of calling the `[[GetOwnProperty]]` internal method of *map* passing *P* as the argument.
3. Let *allowed* be the result of calling the default `[[DefineOwnProperty]]` internal method (8.12.10) on the arguments object passing *P*, *Desc*, and **false** as the arguments.
4. If *allowed* is **false**, then
 - a. If *Throw* is **true** then throw a **TypeError** exception, otherwise return **false**.
5. If the value of *isMapped* is not **undefined**, then
6. If `IsAccessorDescriptor(Desc)` is **true**, then
 - a. Call the `[[Delete]]` internal method of *map* passing *P*, and **false** as the arguments.
7. Else
 - a. If *Desc*.[`Value`] is present, then
 - i. Call the `[[ThrowingPut]]` internal method of *map* passing *P*, *Desc*.[`Value`], and *Throw* as the arguments.
 - b. If *Desc*.[`Writable`] is present and its value is **false**, then
 - i. Call the `[[Delete]]` internal method of *map* passing *P* and **false** as arguments.
8. Return **true**.

The `[[Delete]]` internal method of an arguments object for a function with formal parameters when called with a property name *P* and Boolean flag *Throw* performs the following steps:

1. Let *map* be the value of the `[[ParameterMap]]` internal property of the arguments object.
2. Let *isMapped* be the result of calling the `[[GetOwnProperty]]` internal method of *map* passing *P* as the argument.

Deleted: The `[[ThrowingPut]]` internal method of an arguments object for a function with formal parameters when called with a property name *P*, value *V*, and Boolean flag *Throw* performs the following steps:
<#>Let *map* be the value of the `[[ParameterMap]]` internal property of the arguments object.
<#>Let *isMapped* be the result of calling the `[[GetOwnProperty]]` internal method of *map* passing *P* as the argument.
<#>If the value of *isMapped* is **undefined**, then

- <#>Return the result of calling the default `[[ThrowingPut]]` internal method (8.12.5) on the arguments object passing *P*, *V*, and *Throw* as the arguments.

<#>Else, *map* contains a formal parameter mapping for *P* so,

- <#>Let *canPut* be the result of calling the `[[CanPut]]` internal method of the arguments object passing *P* as the argument.
<#>If *canPut* is **false**, then
 - <#>If *Throw* is true, then throw a **TypeError** exception.
<#>Else return.
- <#>Return the result of calling the `[[ThrowingPut]]` internal method of *map* passing *P*, *V*, and *Throw* as the arguments.

Deleted: Throw

Deleted: return false.

Deleted: if *Desc*.[`Value`] is present, then

3. Let *result* be the result of calling the default `[[Delete]]` internal method (8.12.8) on the arguments object passing *P* and *Throw* as the arguments.
4. If *result* is **true** and the value of *isMapped* is not **undefined**, then
 - a. Call the `[[Delete]]` internal method of *map* passing *P*, and **false** as the arguments.
5. Return *result*.

NOTE

Numerically named data properties of an arguments object whose non-negative numeric name values are less than the number of formal parameters of the corresponding function object share their values with the corresponding argument bindings in the function's execution context. This means that changing the property changes the corresponding value of the argument binding and vice versa. This correspondence is broken in such a property is deleted and then redefined or if the property is changed into an accessor property.

The ParameterMap object and its property values are used as a device for specifying the arguments object correspondence to argument bindings. The ParameterMap object and the objects that are the values of its properties are not directly accessible from ECMAScript code. An ECMAScript implementation does not need to actually create or use such objects to implement the specified semantics.

Arguments objects for strict mode functions define non-configurable accessor properties named "caller" and "callee" which throw a TypeError exception on access. The "caller" property has a more specific meaning for non strict mode functions and a "callee" property has historically been provided as an implementation-defined extension by some ECMAScript implementations. The strict mode definition of these properties exists to ensure that neither of them is defined in any other manner by conforming ECMAScript implementations.

Deleted: data

Deleted: whose values are undefined

10.6 Declaration Binding Instantiation

Every execution context has associated with a VariableEnvironment. Variables and functions declared in ECMAScript code evaluated in an execution context are added as bindings in that VariableEnvironment's Environment Record. For function code, parameters are also added as bindings to that Environment Record.

Deleted: Environment

Which Environment Record is used to bind declaration and its kind depends upon the type of ECMAScript code executed by the execution context, but the remainder of the behaviour is generic. On entering an execution context, bindings are created in the VariableEnvironment environment record as follows using the caller provided *code* and (if it is function code) a function object *func* and argument list *args*:

1. Let *env* be the environment record component of the running execution context's VariableEnvironment.
2. If *code* is strict mode code, then let *strict* be **true** else let *strict* be **false**.
3. If *code* is function code, then
 - a. Let *func* be the function whose `[[Call]]` internal method initiated execution of *code*. Let *names* be the value of *func*'s `[[FormalParameters]]` internal property.
 - b. Let *argCount* be the number of elements in *args*.
 - c. Let *n* be the number 0.
 - d. For each string *argName* in *names*, in list order do
 - i. Let *n* be the current value of *n* plus 1.
 - ii. If *n* is greater than *argCount*, let *v* be **undefined** otherwise let *v* be the value of the *n*'th element of *args*.
 - iii. Let *argAlreadyDeclared* be the result of calling *env*'s `HasBinding(N)` concrete method passing *argName* as the argument.
 - iv. If *argAlreadyDeclared* is **false**, call *env*'s `CreateMutableBind(N)` concrete method passing *argName* as the argument.
 - v. Call *env*'s `SetMutableBinding(N,V,S)` concrete method passing *argName*, *v*, and *strict* as the arguments.
4. For each *FunctionDeclaration f* in the execution context's code, in source text order do
 - a. Let *fn* be the *Identifier* in *FunctionDeclaration f*.
 - b. Let *fo* be the result of evaluating *FunctionDeclaration* for *f* as described in 13.
 - c. Let *funcAlreadyDeclared* be the result of calling *env*'s `HasBinding(N)` concrete method passing *fn* as the argument.
 - d. If *funcAlreadyDeclared* is **false**, call *env*'s `CreateMutableBind(N)` concrete method passing *fn* as the argument.

Deleted: <#-If code is eval code, let eval be true, otherwise let eval be false.¶

- e. Call *env*'s `SetMutableBinding(N,V,S)` concrete method passing *fn*, *fo*, and *strict* as the arguments.
- 5. For each *VariableDeclaration* and *VariableDeclarationNoIn* *d* in the execution context's code, in source text order do
 - a. Let *dn* be the *Identifier* in *d*.
 - b. Let *varAlreadyDeclared* be the result of calling *env*'s `HasBinding(N)` concrete method passing *dn* as the argument.
 - c. If *varAlreadyDeclared* is **false**, then
 - i. Call *env*'s `CreateMutableBind(N)` concrete method passing *dn* as the argument.
 - ii. Call *env*'s `SetMutableBinding(N,V,S)` concrete method passing *dn*, **undefined**, and *strict* as the arguments.
- 6. Let *argumentsAlreadyDeclared* be the result of calling *env*'s `HasBinding(N)` concrete method passing "**arguments**" as the argument
- 7. If the code is function code and *argumentsAlreadyDeclared* is **false**, then
 - a. Let *argsObj* be the result of calling the abstract operation `CreateArgumentsObject` passing *func*, *names*, *args*, *env* and *strict* as arguments.
 - b. If *strict* is **true**, then
 - i. Call *env*'s `CreateImmutableBinding(N)` concrete method passing the string "**arguments**" as the argument.
 - ii. Call *env*'s `InitializeImmutableBind(N,V)` concrete method passing "**arguments**" and *argsObj* as arguments.
 - c. Else,
 - i. Call *env*'s `CreateMutableBinding(N,D)` concrete method passing the string "**arguments**" and **false** as the arguments.
 - ii. Call *env*'s `SetMutableBind(N,V,S)` concrete method passing "**arguments**", *argsObj*, and *strict* as arguments.

Deleted: <#>Else if *strict* is **true** and *eval* is **true** throw an **EvalError** exception.¶

Deleted: <#>Else if *strict* is **true** and *eval* is **true** throw an **EvalError** exception.¶

Deleted: ¶

11 Expressions

11.1 Primary Expressions

Syntax

PrimaryExpression :

this
Identifier
Literal
ArrayLiteral
ObjectLiteral
(*Expression*)

11.1.1 The **this** Keyword

The **this** keyword evaluates to the **this** value of the execution context.

11.1.2 Identifier Reference

An *Identifier* is evaluated using the scoping rules stated in 10.3.1. The result of evaluating an *Identifier* is always a value of type Reference.

11.1.3 Literal Reference

A *Literal* is evaluated as described in 7.8.

11.1.4 Array Initialiser

An array initialiser is an expression describing the initialisation of an Array object, written in a form of a literal. It is a list of zero or more expressions, each of which represents an array element, enclosed in square brackets. The elements need not be literals; they are evaluated each time the array initialiser is evaluated.

Array elements may be elided at the beginning, middle or end of the element list. Whenever a comma in the element list is not preceded by an *AssignmentExpression* (i.e., a comma at the beginning or after another comma), the missing array element contributes to the length of the Array and increases the index

Deleted: 1.4

of subsequent elements. Elided array elements are not defined. If an element is elided at the end of an array, that element does not contribute to the length of the Array.

Syntax

ArrayLiteral :

- [*Elision_{opt}*]
- [*ElementList*]
- [*ElementList* , *Elision_{opt}*]

ElementList :

- Elision_{opt}* *AssignmentExpression*
- ElementList* , *Elision_{opt}* *AssignmentExpression*

Elision :

- ,
- Elision* ,

Semantics

The production *ArrayLiteral* : [*Elision_{opt}*] is evaluated as follows:

1. Let *array* be the result of creating a new object as if by the expression `new Array()` where `Array` is the standard built-in constructor with that name.
2. Let *pad* be the result of evaluating *Elision*; if not present, use the numeric value zero.
3. Call the `[[Put]]` internal method of *array* with arguments "length" and *pad*.
4. Return *array*.

The production *ArrayLiteral* : [*ElementList*] is evaluated as follows:

1. Return the result of evaluating *ElementList*.

The production *ArrayLiteral* : [*ElementList* , *Elision_{opt}*] is evaluated as follows:

1. Let *array* be the result of evaluating *ElementList*.
2. Let *pad* be the result of evaluating *Elision*; if not present, use the numeric value zero.
3. Let *len* be the result of calling the `[[Get]]` internal method of *array* with argument "length".
4. Call the `[[Put]]` internal method of *array* with arguments "length" and `ToUint32(pad+len)`.
5. Return *array*.

The production *ElementList* : *Elision_{opt}* *AssignmentExpression* is evaluated as follows:

1. Let *array* be the result of creating a new object as if by the expression `new Array()` where `Array` is the standard built-in constructor with that name.
2. Let *firstIndex* be the result of evaluating *Elision*; if not present, use the numeric value zero.
3. Let *initResult* be the result of evaluating *AssignmentExpression*.
4. Let *initValue* be `GetValue(initResult)`.
5. Call the `[[DefineOwnProperty]]` internal method of *array* with arguments `Tostring(firstIndex)`, the Property Descriptor { `[[Value]]: initValue`, `[[Writable]]: true`, `[[Enumerable]]: true`, `[[Configurable]]: true`}, and `false`.
6. Return *array*.

The production *ElementList* : *ElementList* , *Elision_{opt}* *AssignmentExpression* is evaluated as follows:

1. Let *array* be the result of evaluating *ElementList*.
2. Let *pad* be the result of evaluating *Elision*; if not present, use the numeric value zero.
3. Let *initResult* be the result of evaluating *AssignmentExpression*.
4. Let *initValue* be `GetValue(initResult)`.
5. Let *len* be the result of calling the `[[Get]]` internal method of *array* with argument "length".
6. Call the `[[DefineOwnProperty]]` internal method of *array* with arguments `Tostring(ToUint32(pad+len))` and the Property Descriptor { `[[Value]]: initValue`, `[[Writable]]: true`, `[[Enumerable]]: true`, `[[Configurable]]: true`}, and `false`.
7. Return *array*.

Deleted: Create
Deleted: array
Deleted: Evaluate
Deleted: Result(1)
Deleted: Result(2)
Deleted: Result(1)
Deleted: Evaluate
Deleted: <#>Return Result(1),¶
Deleted: Evaluate
Deleted: Evaluate
Deleted: Call
Deleted: Result(1)
Deleted: Result(1)
Deleted: Result(2)
Deleted: Result(3)
Deleted: Result(1)
Deleted: Create
Deleted: array
Deleted: Evaluate
Deleted: Evaluate
Deleted: Call
Deleted: Result(3)
Deleted: Put
Deleted: Result(1)
Deleted: Result(2)
Deleted: and Result(4)
Deleted: Result(1)
Deleted: Evaluate
Deleted: Evaluate
Deleted: Evaluate
Deleted: Call
Deleted: Result(3)
Deleted: Call
Deleted: Result(1)
Deleted: Put
Deleted: Result(1)
Deleted: Result(2)
Deleted: Result(5)
Deleted: Result(4)
Deleted: Result(1)

The production *Elision* : , is evaluated as follows:

1. Return the numeric value **1**.

The production *Elision* : *Elision* , is evaluated as follows:

1. Let preceding be the result of evaluating *Elision*.
2. Return (preceding+1).

Deleted: Evaluate

Deleted: Result(1)

NOTE

The use of [[Put]] rather than [[ThrowingPut]] in this section is intentional as there are no situations where these [[Put]] operations may fail. [[DefineOwnProperty]] is used to ensure that own properties are defined for the array even if the standard built-in Array prototype object has been modified in a manner that would preclude the creation of new own properties using [[Put]].

11.1.5 Object Initialiser

An object initialiser is an expression describing the initialisation of an Object, written in a form resembling a literal. It is a list of zero or more pairs of property names and associated values, enclosed in curly braces. The values need not be literals; they are evaluated each time the object initialiser is evaluated.

Syntax

ObjectLiteral :

```
{ }
{ PropertyNameAndValueList }
{ PropertyNameAndValueList , }
```

PropertyNameAndValueList :

```
PropertyAssignment
PropertyNameAndValueList , PropertyAssignment
```

Deleted: PropertyName : AssignmentExpression

Deleted: PropertyName : AssignmentExpression

PropertyAssignment :

```
PropertyName : AssignmentExpression
get PropertyName ( ) { FunctionBody }
set PropertyName ( PropertySetParameterList ) { FunctionBody }
```

PropertyName :

```
IdentifierName
StringLiteral
NumericLiteral
```

PropertySetParameterList :

Identifier

Semantics

The production *ObjectLiteral* : { } is evaluated as follows:

1. Return a new object **created** as if by the expression `new Object()` where Object is the standard built-in constructor with that name.

Deleted: Create

The productions *ObjectLiteral* : { *PropertyNameAndValueList* } and

Deleted: <#>Return Result(1),¶

ObjectLiteral : { *PropertyNameAndValueList* , } are evaluated as follows:

Deleted:

1. Return the result of evaluating *PropertyNameAndValueList*.

Deleted: is

The production

Deleted: Evaluate

PropertyNameAndValueList : PropertyAssignment is evaluated as follows:

Deleted: <#>Return Result(1),¶

Deleted: PropertyName : AssignmentExpression

1. Let obj be the result of creating a new object as if by the expression `new Object()` where Object is the standard built-in constructor with that name.

Deleted: Create

2. Let *propId* be the result of evaluating *PropertyAssignment*.
3. Call the `[[DefineOwnProperty]]` internal method of *obj* with arguments *propId.name*, *propId.descriptor*, and **false**.
4. Return *obj*.

The production

PropertyNameAndValueList : *PropertyNameAndValueList*, *PropertyAssignment*
is evaluated as follows:

1. Let *obj* be the result of evaluating *PropertyNameAndValueList*.
2. Let *propId* be the result of evaluating *PropertyAssignment*.
3. Let *previous* be the result of calling the `[[GetOwnProperty]]` internal method of *obj* with argument *propId.name*.
4. If *previous* is not **undefined** then throw a **SyntaxError** exception if any of the following conditions are true
 - a. This production is contained in strict code and `IsAccessorDescriptor(previous)` is **true** and `IsAccessorDescriptor(propId.descriptor)` is **true**.
 - b. `IsPropertyDescriptor(previous)` is **true** and `IsAccessorDescriptor(propId.descriptor)` is **true**.
 - c. `IsAccessDescriptor(previous)` is **true** and `IsPropertyDescriptor(propId.descriptor)` is **true**.
 - d. `IsPropertyDescriptor(previous)` is **true** and `IsPropertyDescriptor(propId.descriptor)` is **true** and either both *previous* and *propId.descriptor* have `[[Get]]` fields or both *previous* and *propId.descriptor* have `[[Set]]` fields
5. Call the `[[DefineOwnProperty]]` internal method of *obj* with arguments *propId.name*, *propId.descriptor*, and **false**.
6. Return *obj*.

If the above steps would throw a **SyntaxError** then an implementation must report the error immediately when scanning the program.

The production *PropertyAssignment* : *PropertyName* : *AssignmentExpression* is evaluated as follows:

1. Let *propName* be the result of evaluating *PropertyName*.
2. Let *exprValue* be the result of evaluating *AssignmentExpression*.
3. Let *propValue* be `GetValue(exprValue)`.
4. Let *desc* be the Property Descriptor `{[[Value]]: propValue, [[Writable]]: true, [[Enumerable]]: true, [[Configurable]]: true}`.
5. Return Property Identifier (*propName*, *desc*).

The production *PropertyAssignment* : **get** *PropertyName* () { *FunctionBody* } is evaluated as follows:

1. Let *propName* be the result of evaluating *PropertyName*.
2. Let *descriptiveName* be the result of concatenating the String **"get "** and *propName*.
3. Let *closure* be the result of creating a new Function object as specified in 13.2 with an empty parameter list and body specified by *FunctionBody*. Pass in the Lexical Environment of the running execution context as the *Scope*, and *descriptiveName* as the *Name*.
4. Let *desc* be the Property Descriptor `{[[Get]]: closure, [[Enumerable]]: true, [[Configurable]]: true}`.
5. Return Property Identifier (*propName*, *desc*).

The production *PropertyAssignment* : **set** *PropertyName* (*PropertySetParameterList*) { *FunctionBody* } is evaluated as follows:

1. Let *propName* be the result of evaluating *PropertyName*.
2. Let *descriptiveName* be the result of concatenating the String **"set "** and *propName*.
3. Let *closure* be the result of creating a new Function object as specified in 13.2 with parameters specified by *PropertySetParameterList* and body specified by *FunctionBody*. Pass in the Lexical Environment of the running execution context as the *Scope*, and *descriptiveName* as the *Name*.
4. Let *desc* be the Property Descriptor `{[[Set]]: closure, [[Enumerable]]: true, [[Configurable]]: true}`.
5. Return Property Identifier (*propName*, *desc*).

The production *PropertyName* : *IdentifierName* is evaluated as follows:

1. Return the string value containing the same sequence of characters as the *IdentifierName*.

Deleted: Evaluate

Deleted: *PropertyName*

Deleted: Evaluate *AssignmentExpression*.

Deleted: `GetValue(Result(3))`

Deleted: Call the `[[Put]]` method of `Result(1)` with arguments `Result(2)` and `Result(4)`.

Deleted: *Result(1)*

Deleted: *PropertyName* : *AssignmentExpression*

Deleted: Evaluate

Deleted: Evaluate

Deleted: *PropertyName*

Deleted: Evaluate *AssignmentExpression*.

Deleted: `GetValue(Result(3))`

Deleted: Call the `[[Put]]` method of `Result(1)` with arguments `Result(2)` and `Result(4)`.

Deleted: *Result(1)*

Deleted: result

Deleted: Form a string literal

The production *PropertyName : StringLiteral* is evaluated as follows:

1. Return the value of the *StringLiteral*.

Deleted: <#>Return Result(1),¶

The production *PropertyName : NumericLiteral* is evaluated as follows:

1. Let *nbr* be the result of forming the value of the *NumericLiteral*.
2. Return ToString(*nbr*).

Deleted: Form

Deleted: Result(1)

11.1.6 The Grouping Operator

The production *PrimaryExpression : (Expression)* is evaluated as follows:

1. Return the result of evaluating *Expression*. This may be of type Reference.

Deleted: Evaluate

NOTE

This algorithm does not apply *GetValue* to the result of evaluating *Expression*. The principal motivation for this is so that operators such as **delete** and **typeof** may be applied to parenthesised expressions.

Deleted: <#>Return Result(1),¶

Deleted: Result(1)

11.2 Left-Hand-Side Expressions

Syntax

MemberExpression :

PrimaryExpression
FunctionExpression
MemberExpression [*Expression*]
MemberExpression . *IdentifierName*
new *MemberExpression* *Arguments*

NewExpression :

MemberExpression
new *NewExpression*

CallExpression :

MemberExpression *Arguments*
CallExpression *Arguments*
CallExpression [*Expression*]
CallExpression . *IdentifierName*

Arguments :

()
(*ArgumentList*)

ArgumentList :

AssignmentExpression
ArgumentList , *AssignmentExpression*

LeftHandSideExpression :

NewExpression
CallExpression

11.2.1 Property Accessors

Properties are accessed by name, using either the dot notation:

MemberExpression . *IdentifierName*
CallExpression . *IdentifierName*

or the bracket notation:

MemberExpression [Expression]
CallExpression [Expression]

The dot notation is explained by the following syntactic conversion:

MemberExpression . IdentifierName

is identical in its behaviour to

MemberExpression [<identifier-name-string>]

and similarly

CallExpression . IdentifierName

is identical in its behaviour to

CallExpression [<identifier-name-string>]

where <identifier-name-string> is a string literal containing the same sequence of characters after processing of Unicode escape sequences as the IdentifierName.

The production MemberExpression : MemberExpression [Expression] is evaluated as follows:

1. Let baseReference be the result of evaluating MemberExpression.
2. Let baseValue be GetValue(baseReference).
3. Let propertyNameReference be the result of evaluating Expression.
4. Let propertyNameValue be GetValue(propertyNameReference).
5. Call CheckObjectCoercible(baseValue).
6. Let propertyNameString be ToString(propertyNameValue).
7. If the syntactic production that is being evaluated is contained in strict mode code, let strict be true, else let strict be false.
8. Return a value of type Reference whose base value is baseValue and whose referenced name is propertyNameString, and whose strict mode flag is strict.

The production CallExpression : CallExpression [Expression] is evaluated in exactly the same manner, except that the contained CallExpression is evaluated in step 1.

11.2.2 The new Operator

The production NewExpression : new NewExpression is evaluated as follows:

1. Let ref be the result of evaluating NewExpression.
2. Let constructor be GetValue(ref).
3. If Type(constructor) is not Object, throw a TypeError exception.
4. If constructor does not implement the [[Construct]] internal method, throw a TypeError exception.
5. Return the result of calling the [[Construct]] method on constructor, providing no arguments (that is, an empty list of arguments).

The production MemberExpression : new MemberExpression Arguments is evaluated as follows:

1. Let ref be the result of evaluating MemberExpression.
2. Let constructor be GetValue(ref).
3. Let argList be the result of evaluating Arguments, producing an internal list of argument values (11.2.4).
4. If Type(constructor) is not Object, throw a TypeError exception.
5. If constructor does not implement the [[Construct]] internal method, throw a TypeError exception.
6. Call the [[Construct]] method on constructor, providing the list argList as the argument values.

11.2.3 Function Calls

The production CallExpression : MemberExpression Arguments is evaluated as follows:

1. Let ref be the result of evaluating MemberExpression.

Diagram showing a vertical stack of 24 boxes, each containing the text "Deleted: Evaluate" or "Deleted: Call" or "Deleted: Result(1)" or "Deleted: Result(2)" or "Deleted: Result(3)" or "Deleted: Result(4)" or "Deleted: Result(5)" or "Deleted: Result(6)" or "Deleted: internal" or "Deleted: object" or "Deleted: property". The boxes are connected to the text in the main document by lines. The top 12 boxes are red-bordered and the bottom 12 boxes are blue-bordered.

2. Let *func* be `GetValue(ref)`.
3. Let *argList* be the result of evaluating *Arguments*, producing an internal list of argument values (see 11.2.4).
4. If `Type(func)` is not `Object`, throw a `TypeError` exception.
5. If `IsCallable(func)` is `false`, throw a `TypeError` exception.
6. If `Type(ref)` is `Reference`, and `IsPropertyReference(ref)` is `true`, let *thisValue* be `GetBase(ref)`. Otherwise, *thisValue* is `null`.
7. Return the result of calling the `[[Call]]` internal method on *func*, providing *thisValue* as the `this` value and providing the list *argList* as the argument values.

The production `CallExpression : CallExpression Arguments` is evaluated in exactly the same manner, except that the contained `CallExpression` is evaluated in step 1.

NOTE

The returned result will never be of type `Reference` if *func* is a native ECMAScript object. Whether calling a host object can return a value of type `Reference` is implementation-dependent. If a value of type `Reference` is returned, it must be a non-strict `Property Reference`.

11.2.4 Argument Lists

The evaluation of an argument list produces an internal list of values (see 8.8).

The production `Arguments : ()` is evaluated as follows:

1. Return an empty internal list of values.

The production `Arguments : (ArgumentList)` is evaluated as follows:

1. Return the result of evaluating *ArgumentList*.

The production `ArgumentList : AssignmentExpression` is evaluated as follows:

1. Let *ref* be the result of evaluating *AssignmentExpression*.
2. Let *arg* be `GetValue(ref)`.
3. Return an internal list whose sole item is *arg*.

The production `ArgumentList : ArgumentList , AssignmentExpression` is evaluated as follows:

1. Let *preedingArgs* be the result of evaluating *ArgumentList*.
2. Let *ref* be the result of evaluating *AssignmentExpression*.
3. Let *arg* be `GetValue(ref)`.
4. Return an internal list whose length is one greater than the length of *preedingArgs*, and whose items are the items of *preedingArgs*, in order, followed at the end by *arg*, which is the last item of the new list.

11.2.5 Function Expressions

The production `MemberExpression : FunctionExpression` is evaluated as follows:

1. Return the result of evaluating *FunctionExpression*.

11.3 Postfix Expressions

Syntax

PostfixExpression :

LeftHandSideExpression

LeftHandSideExpression [no *LineTerminator* here] ++

LeftHandSideExpression [no *LineTerminator* here] --

11.3.1 Postfix Increment Operator

The production `PostfixExpression : LeftHandSideExpression` [no *LineTerminator* here] ++ is evaluated as follows:

1. Evaluate *LeftHandSideExpression*.

Deleted: Call

Deleted: Result(1)

Deleted: Evaluate

Deleted: <#>Call GetValue(Result(1)).¶

Deleted: Result(32)

Deleted: Result(32)

Deleted: does not implement the internal `[[Call]]` method

Deleted: Result(1)

Deleted: Result(1)

Deleted: Result(6) is

Deleted: Result(1)

Deleted: Result(6)

Deleted: <#>If Result(6) is an activation object, Result(7) is `null`. Otherwise, Result(7) is the same as Result(6).¶

Deleted: Call

Deleted: Result(32)

Deleted: Result(76)

Deleted: Result(23)

Deleted: <#>Return Result(87).¶

Deleted: Result(8)

Deleted: Result(32)

Deleted: Evaluate

Deleted: <#>Return Result(1).¶

Deleted: Evaluate

Deleted: Call

Deleted: Result(1)

Deleted: Result(2)

Deleted: Evaluate

Deleted: Evaluate

Deleted: Call

Deleted: Result(2)

Deleted: list

Deleted: Result(1)

Deleted: Result(1)

Deleted: Result(3),

Deleted: <#>Evaluate *FunctionExpression*.¶

Deleted: Result(1)

2. Call GetValue(Result(1)).
3. Call ToNumber(Result(2)).
4. Add the value 1 to Result(3), using the same rules as for the + operator (see 11.6.3).
5. Call PutValue(Result(1), Result(4)).
6. Return Result(3).

11.3.2 Postfix Decrement Operator

The production *PostfixExpression* : *LeftHandSideExpression* [no *LineTerminator* here] -- is evaluated as follows:

1. Evaluate *LeftHandSideExpression*.
2. Call GetValue(Result(1)).
3. Call ToNumber(Result(2)).
4. Subtract the value 1 from Result(3), using the same rules as for the - operator (11.6.3).
5. Call PutValue(Result(1), Result(4)).
6. Return Result(3).

11.4 Unary Operators

Syntax

UnaryExpression :

PostfixExpression
delete *UnaryExpression*
void *UnaryExpression*
typeof *UnaryExpression*
++ *UnaryExpression*
-- *UnaryExpression*
+ *UnaryExpression*
- *UnaryExpression*
~ *UnaryExpression*
! *UnaryExpression*

11.4.1 The delete Operator

The production *UnaryExpression* : **delete** *UnaryExpression* is evaluated as follows:

1. Let *ref* be the result of evaluating *UnaryExpression*.
2. If Type(*ref*) is not Reference, return **true**.
3. If UnresolvableReference(*ref*) return **true**.
4. If IsPropertyReference(*ref*) is **true**, then
 - a. Return the result of calling the [[Delete]] internal method on ToObject(GetBase(*ref*)) providing GetReferencedName(*ref*) and IsStrictReference(*ref*) as the arguments.
5. Else, *ref* is a Reference to an Environment Record binding, so
 - a. If IsStrictReference(*ref*) is **true** throw a **ReferenceError** exception.
 - b. If GetBase(*ref*) is a declarative environment record, return **false**.
 - c. Let *obj* be the binding object of the object environment record that is the value of GetBase(*ref*).
 - d. Return the result of calling the [[Delete]] internal method on *obj*, providing GetReferencedName(*ref*) and **false** as the arguments.

NOTE

When a **delete** operator occurs within strict mode code, a **ReferenceError** exception is thrown if its *UnaryExpression* is a direct reference to a variable, function argument, or function name. In addition, if the property to be deleted has the attribute { [[Configurable]]: **false** }, a **TypeError** exception is thrown.

11.4.2 The void Operator

The production *UnaryExpression* : **void** *UnaryExpression* is evaluated as follows:

1. Evaluate *UnaryExpression*.
2. Call GetValue(Result(1)).
3. Return **undefined**.

Deleted: Evaluate

Deleted: Result(1)

Deleted: <#>Call GetBase(Result(1)),
<#>Call GetPropertyName(Result(1)),
Call

Deleted: Result(3), providing Result(4)

Deleted: as the property name to delete

Deleted: Return Result(5),

11.4.3 The typeof Operator

The production *UnaryExpression* : **typeof** *UnaryExpression* is evaluated as follows:

1. Let *val* be the result of evaluating *UnaryExpression*.
2. If Type(*val*) is not Reference, then
 - a. If `JsUnresolvableReference(val)` is **true**, return **"undefined"**.
 - b. Let *val* GetValue(*val*).
3. Return a string determined by Type(*val*) according to the following table:

Type	Result
Undefined	"undefined"
Null	"object"
Boolean	"boolean"
Number	"number"
String	"string"
Object (native and doesn't implement [[Call]])	"object"
Object (native <u>or host</u> and implements [[Call]])	"function"
Object (host <u>and doesn't</u> implement [[Call]])	Implementation- <u>defined</u>

- Deleted: Evaluate
- Deleted: Result(1)
- Deleted: go to step 4.
- Deleted: GetBase
- Deleted: Result(1)
- Deleted: null
- Deleted: Call
- Deleted: Result(1)
- Deleted: Result(4)

Deleted: dependent

11.4.4 Prefix Increment Operator

The production *UnaryExpression* : **++** *UnaryExpression* is evaluated as follows:

1. Evaluate *UnaryExpression*.
2. Call GetValue(Result(1)).
3. Call ToNumber(Result(2)).
4. Add the value 1 to Result(3), using the same rules as for the + operator (see 11.6.3).
5. Call PutValue(Result(1), Result(4)).
6. Return Result(4).

11.4.5 Prefix Decrement Operator

The production *UnaryExpression* : **--** *UnaryExpression* is evaluated as follows:

1. Evaluate *UnaryExpression*.
2. Call GetValue(Result(1)).
3. Call ToNumber(Result(2)).
4. Subtract the value 1 from Result(3), using the same rules as for the - operator (see 11.6.3).
5. Call PutValue(Result(1), Result(4)).
6. Return Result(4).

11.4.6 Unary + Operator

The unary + operator converts its operand to Number type.

The production *UnaryExpression* : **+** *UnaryExpression* is evaluated as follows:

1. Evaluate *UnaryExpression*.
2. Call GetValue(Result(1)).
3. Call ToNumber(Result(2)).
4. Return Result(3).

11.4.7 Unary - Operator

The unary - operator converts its operand to Number type and then negates it. Note that negating +0 produces -0, and negating -0 produces +0.

The production *UnaryExpression* : - *UnaryExpression* is evaluated as follows:

1. Evaluate *UnaryExpression*.
2. Call `GetValue(Result(1))`.
3. Call `ToNumber(Result(2))`.
4. If `Result(3)` is **NaN**, return **NaN**.
5. Negate `Result(3)`; that is, compute a number with the same magnitude but opposite sign.
6. Return `Result(5)`.

11.4.8 Bitwise NOT Operator (~)

The production *UnaryExpression* : ~ *UnaryExpression* is evaluated as follows:

1. Evaluate *UnaryExpression*.
2. Call `GetValue(Result(1))`.
3. Call `ToInt32(Result(2))`.
4. Apply bitwise complement to `Result(3)`. The result is a signed 32-bit integer.
5. Return `Result(4)`.

11.4.9 Logical NOT Operator (!)

The production *UnaryExpression* : ! *UnaryExpression* is evaluated as follows:

1. Evaluate *UnaryExpression*.
2. Call `GetValue(Result(1))`.
3. Call `ToBoolean(Result(2))`.
4. If `Result(3)` is **true**, return **false**.
5. Return **true**.

11.5 Multiplicative Operators

Syntax

MultiplicativeExpression :

UnaryExpression
MultiplicativeExpression * *UnaryExpression*
MultiplicativeExpression / *UnaryExpression*
MultiplicativeExpression % *UnaryExpression*

Semantics

The production *MultiplicativeExpression* : *MultiplicativeExpression* @ *UnaryExpression*, where @ stands for one of the operators in the above definitions, is evaluated as follows:

1. Evaluate *MultiplicativeExpression*.
2. Call `GetValue(Result(1))`.
3. Evaluate *UnaryExpression*.
4. Call `GetValue(Result(3))`.
5. Call `ToNumber(Result(2))`.
6. Call `ToNumber(Result(4))`.
7. Apply the specified operation (*, /, or %) to `Result(5)` and `Result(6)`. See the notes below (11.5.1, 11.5.2, 11.5.3).
8. Return `Result(7)`.

11.5.1 Applying the * Operator

The * operator performs multiplication, producing the product of its operands. Multiplication is commutative. Multiplication is not always associative in ECMAScript, because of finite precision.

The result of a floating-point multiplication is governed by the rules of IEEE 754 double-precision arithmetic:

If either operand is **NaN**, the result is **NaN**.

The sign of the result is positive if both operands have the same sign, negative if the operands have different signs.

Multiplication of an infinity by a zero results in **NaN**.

Multiplication of an infinity by an infinity results in an infinity. The sign is determined by the rule already stated above.

Multiplication of an infinity by a finite non-zero value results in a signed infinity. The sign is determined by the rule already stated above.

In the remaining cases, where neither an infinity or NaN is involved, the product is computed and rounded to the nearest representable value using IEEE 754 round-to-nearest mode. If the magnitude is too large to represent, the result is then an infinity of appropriate sign. If the magnitude is too small to represent, the result is then a zero of appropriate sign. The ECMAScript language requires support of gradual underflow as defined by IEEE 754.

11.5.2 Applying the / Operator

The / operator performs division, producing the quotient of its operands. The left operand is the dividend and the right operand is the divisor. ECMAScript does not perform integer division. The operands and result of all division operations are double-precision floating-point numbers. The result of division is determined by the specification of IEEE 754 arithmetic:

If either operand is **NaN**, the result is **NaN**.

The sign of the result is positive if both operands have the same sign, negative if the operands have different signs.

Division of an infinity by an infinity results in **NaN**.

Division of an infinity by a zero results in an infinity. The sign is determined by the rule already stated above.

Division of an infinity by a non-zero finite value results in a signed infinity. The sign is determined by the rule already stated above.

Division of a finite value by an infinity results in zero. The sign is determined by the rule already stated above.

Division of a zero by a zero results in **NaN**; division of zero by any other finite value results in zero, with the sign determined by the rule already stated above.

Division of a non-zero finite value by a zero results in a signed infinity. The sign is determined by the rule already stated above.

In the remaining cases, where neither an infinity, nor a zero, nor **NaN** is involved, the quotient is computed and rounded to the nearest representable value using IEEE 754 round-to-nearest mode. If the magnitude is too large to represent, the operation overflows; the result is then an infinity of appropriate sign. If the magnitude is too small to represent, the operation underflows and the result is a zero of the appropriate sign. The ECMAScript language requires support of gradual underflow as defined by IEEE 754.

11.5.3 Applying the % Operator

The % operator yields the remainder of its operands from an implied division; the left operand is the dividend and the right operand is the divisor.

NOTE

In C and C++, the remainder operator accepts only integral operands; in ECMAScript, it also accepts floating-point operands.

The result of a floating-point remainder operation as computed by the % operator is not the same as the “remainder” operation defined by IEEE 754. The IEEE 754 “remainder” operation computes the remainder from a rounding division, not a truncating division, and so its behaviour is not analogous to that of the usual integer remainder operator. Instead the ECMAScript language defines % on floating-point operations to behave in a manner analogous to that of the Java integer remainder operator; this may be compared with the C library function fmod.

The result of a ECMAScript floating-point remainder operation is determined by the rules of IEEE arithmetic:

If either operand is **NaN**, the result is **NaN**.

The sign of the result equals the sign of the dividend.

If the dividend is an infinity, or the divisor is a zero, or both, the result is **NaN**.
 If the dividend is finite and the divisor is an infinity, the result equals the dividend.
 If the dividend is a zero and the divisor is finite, the result is the same as the dividend.
 In the remaining cases, where neither an infinity, nor a zero, nor **NaN** is involved, the floating-point remainder *r* from a dividend *n* and a divisor *d* is defined by the mathematical relation $r = n - (d * q)$ where *q* is an integer that is negative only if *n/d* is negative and positive only if *n/d* is positive, and whose magnitude is as large as possible without exceeding the magnitude of the true mathematical quotient of *n* and *d*.

11.6 Additive Operators

Syntax

AdditiveExpression :

MultiplicativeExpression

AdditiveExpression + MultiplicativeExpression

AdditiveExpression - MultiplicativeExpression

11.6.1 The Addition operator (+)

The addition operator either performs string concatenation or numeric addition.

The production *AdditiveExpression* : *AdditiveExpression* + *MultiplicativeExpression* is evaluated as follows:

1. Let *lref* be the result of evaluating AdditiveExpression.
2. Let *lval* be the result of calling GetValue(*lref*).
3. Let *rref* be the result of evaluating MultiplicativeExpression.
4. Let *rval* be the result of calling GetValue(*rref*).
5. Let *lprim* be the result of calling ToPrimitive(*lval*).
6. Let *rprim* be the result of calling ToPrimitive(*rval*).
7. If Type(*lprim*) is String or Type(*rprim*) is String, then (Note that this step differs from step 3 in the comparison algorithm for the relational operators, by using or instead of and.)
 - a. Return the String that is the result of concatenating ToString(*lprim*) followed by ToString(*rprim*).
8. Return the result of applying the addition operation to ToString(*lprim*) and ToString(*rprim*). See the note below (11.6.3).

NOTE

No hint is provided in the calls to ToPrimitive in steps 5 and 6. All native ECMAScript objects except Date objects handle the absence of a hint as if the hint Number were given; Date objects handle the absence of a hint as if the hint String were given. Host objects may handle the absence of a hint in some other manner.

11.6.2 The Subtraction Operator (-)

The production *AdditiveExpression* : *AdditiveExpression* - *MultiplicativeExpression* is evaluated as follows:

1. Evaluate AdditiveExpression.
2. Call GetValue(Result(1)).
3. Evaluate MultiplicativeExpression.
4. Call GetValue(Result(3)).
5. Call ToNumber(Result(2)).
6. Call ToNumber(Result(4)).
7. Apply the subtraction operation to Result(5) and Result(6). See the note below (11.6.3).
8. Return Result(7).

11.6.3 Applying the Additive Operators (+ , -) to Numbers

The + operator performs addition when applied to two operands of numeric type, producing the sum of the operands. The - operator performs subtraction, producing the difference of two numeric operands.

Addition is a commutative operation, but not always associative.

Deleted: Evaluate

Deleted: Call

Deleted: Result(1)

Deleted: Evaluate

Deleted: Call

Deleted: Result(3)

Deleted: Call

Deleted: Result(2)

Deleted: Call

Deleted: Result(4)

Deleted: Result(5)

Deleted: Result(6)

Deleted: go to step 12.

Deleted: <#>Call ToString(Result(5)).
 <#>Call ToString(Result(6)).
 <#>Concatenate Result(7a) followed by Result(7b).
 <#>Return Result(7c).
 <#>Call ToNumber(Result(5)).
 <#>Call ToNumber(Result(6)).
 Apply

Deleted: Result(8)

Deleted: Result(9)

Deleted: <#>Return Result(10).

Deleted: <#>Call ToString(Result(5)).
 <#>Call ToString(Result(6)).
 <#>Concatenate Result(12) followed by Result(13).
 <#>Return Result(14).

The result of an addition is determined using the rules of IEEE 754 double-precision arithmetic:

If either operand is **NaN**, the result is **NaN**.

The sum of two infinities of opposite sign is **NaN**.

The sum of two infinities of the same sign is the infinity of that sign.

The sum of an infinity and a finite value is equal to the infinite operand.

The sum of two negative zeros is **-0**. The sum of two positive zeros, or of two zeros of opposite sign, is **+0**.

The sum of a zero and a nonzero finite value is equal to the nonzero operand.

The sum of two nonzero finite values of the same magnitude and opposite sign is **+0**.

In the remaining cases, where neither an infinity, nor a zero, nor NaN is involved, and the operands have the same sign or have different magnitudes, the sum is computed and rounded to the nearest representable value using IEEE 754 round-to-nearest mode. If the magnitude is too large to represent, the operation overflows and the result is then an infinity of appropriate sign. The ECMAScript language requires support of gradual underflow as defined by IEEE 754.

The **-** operator performs subtraction when applied to two operands of numeric type, producing the difference of its operands; the left operand is the minuend and the right operand is the subtrahend. Given numeric operands a and b , it is always the case that $a-b$ produces the same result as $a+(-b)$.

11.7 Bitwise Shift Operators

Syntax

ShiftExpression :

AdditiveExpression

ShiftExpression << *AdditiveExpression*

ShiftExpression >> *AdditiveExpression*

ShiftExpression >>> *AdditiveExpression*

11.7.1 The Left Shift Operator (<<)

Performs a bitwise left shift operation on the left operand by the amount specified by the right operand.

The production *ShiftExpression* : *ShiftExpression* << *AdditiveExpression* is evaluated as follows:

1. Evaluate *ShiftExpression*.
2. Call `GetValue(Result(1))`.
3. Evaluate *AdditiveExpression*.
4. Call `GetValue(Result(3))`.
5. Call `ToInt32(Result(2))`.
6. Call `ToUint32(Result(4))`.
7. Mask out all but the least significant 5 bits of `Result(6)`, that is, compute `Result(6) & 0x1F`.
8. Left shift `Result(5)` by `Result(7)` bits. The result is a signed 32 bit integer.
9. Return `Result(8)`.

11.7.2 The Signed Right Shift Operator (>>)

Performs a sign-filling bitwise right shift operation on the left operand by the amount specified by the right operand.

The production *ShiftExpression* : *ShiftExpression* >> *AdditiveExpression* is evaluated as follows:

1. Evaluate *ShiftExpression*.
2. Call `GetValue(Result(1))`.
3. Evaluate *AdditiveExpression*.
4. Call `GetValue(Result(3))`.
5. Call `ToInt32(Result(2))`.
6. Call `ToUint32(Result(4))`.
7. Mask out all but the least significant 5 bits of `Result(6)`, that is, compute `Result(6) & 0x1F`.
8. Perform sign-extending right shift of `Result(5)` by `Result(7)` bits. The most significant bit is propagated. The result is a signed 32 bit integer.

9. Return Result(8).

11.7.3 The Unsigned Right Shift Operator (>>>)

Performs a zero-filling bitwise right shift operation on the left operand by the amount specified by the right operand.

The production *ShiftExpression* : *ShiftExpression* >>> *AdditiveExpression* is evaluated as follows:

1. Evaluate *ShiftExpression*.
2. Call GetValue(Result(1)).
3. Evaluate *AdditiveExpression*.
4. Call GetValue(Result(3)).
5. Call ToUint32(Result(2)).
6. Call ToUint32(Result(4)).
7. Mask out all but the least significant 5 bits of Result(6), that is, compute Result(6) & 0x1F.
8. Perform zero-filling right shift of Result(5) by Result(7) bits. Vacated bits are filled with zero. The result is an unsigned 32 bit integer.
9. Return Result(8).

11.8 Relational Operators

Deleted: 11.4

Syntax

RelationalExpression :

ShiftExpression
RelationalExpression < *ShiftExpression*
RelationalExpression > *ShiftExpression*
RelationalExpression <= *ShiftExpression*
RelationalExpression >= *ShiftExpression*
RelationalExpression **instanceof** *ShiftExpression*
RelationalExpression **in** *ShiftExpression*

RelationalExpressionNoIn :

ShiftExpression
RelationalExpressionNoIn < *ShiftExpression*
RelationalExpressionNoIn > *ShiftExpression*
RelationalExpressionNoIn <= *ShiftExpression*
RelationalExpressionNoIn >= *ShiftExpression*
RelationalExpressionNoIn **instanceof** *ShiftExpression*

NOTE

The 'NoIn' variants are needed to avoid confusing the *in* operator in a relational expression with the *in* operator in a *for* statement.

Semantics

The result of evaluating a relational operator is always of type Boolean, reflecting whether the relationship named by the operator holds between its two operands.

The *RelationalExpressionNoIn* productions are evaluated in the same manner as the *RelationalExpression* productions except that the contained *RelationalExpressionNoIn* is evaluated instead of the contained *RelationalExpression*.

11.8.1 The Less-than Operator (<)

The production *RelationalExpression* : *RelationalExpression* < *ShiftExpression* is evaluated as follows:

1. Evaluate *RelationalExpression*.
2. Call GetValue(Result(1)).
3. Evaluate *ShiftExpression*.
4. Call GetValue(Result(3)).
5. Perform the comparison Result(2) < Result(4). (see 11.8.5)
6. If Result(6) is **undefined**, return **false**. Otherwise, return Result(6).

Deleted: 5

Deleted: 5

11.8.2 The Greater-than Operator (>)

The production *RelationalExpression* : *RelationalExpression* > *ShiftExpression* is evaluated as follows:

1. Evaluate *RelationalExpression*.
2. Call GetValue(Result(1)).
3. Evaluate *ShiftExpression*.
4. Call GetValue(Result(3)).
5. Perform the comparison Result(4) < Result(2) with LeftFirst equal to false. (see 11.8.5).
6. If Result(6) is **undefined**, return **false**. Otherwise, return Result(6).

Deleted: 5

Deleted: 5

11.8.3 The Less-than-or-equal Operator (<=)

The production *RelationalExpression* : *RelationalExpression* <= *ShiftExpression* is evaluated as follows:

1. Evaluate *RelationalExpression*.
2. Call GetValue(Result(1)).
3. Evaluate *ShiftExpression*.
4. Call GetValue(Result(3)).
5. Perform the comparison Result(4) < Result(2) with LeftFirst equal to false. (see 11.8.5).
6. If Result(6) is **true** or **undefined**, return **false**. Otherwise, return **true**.

Deleted: 5

11.8.4 The Greater-than-or-equal Operator (>=)

The production *RelationalExpression* : *RelationalExpression* >= *ShiftExpression* is evaluated as follows:

1. Evaluate *RelationalExpression*.
2. Call GetValue(Result(1)).
3. Evaluate *ShiftExpression*.
4. Call GetValue(Result(3)).
5. Perform the comparison Result(2) < Result(4). (see 11.8.5).
6. If Result(6) is **true** or **undefined**, return **false**. Otherwise, return **true**.

Deleted: 5

11.8.5 The Abstract Relational Comparison Algorithm

The comparison $x < y$, where x and y are values, produces **true**, **false**, or **undefined** (which indicates that at least one operand is NaN). In addition to x and y the algorithm takes a boolean flag named *LeftFirst* as a parameter. The flag is used to control the order in which operations with potentially visible side-effects are performed upon x and y . It is necessary because ECMAScript specifies left to right evaluation of expressions. The default value of *LeftFirst* is **true** and indicates that the x parameter corresponds to an expression that occurs to the left of the y parameter's corresponding expression. If *LeftFirst* is **false**, the reverse is the case and operations must be performed upon y before x . Such a comparison is performed as follows:

1. If the *LeftFirst* flag is true, then
 - a. Let px be the result of calling ToPrimitive(x , hint Number).
 - b. Let py be the result of calling ToPrimitive(y , hint Number).
2. Else the order of evaluation needs to be reversed to preserve left to right evaluation
 - a. Let py be the result of calling ToPrimitive(y , hint Number).
 - b. Let px be the result of calling ToPrimitive(x , hint Number).
3. If it is not the case that both Type(px) is String and Type(py) is String, then (Note that this step differs from step 7 in the algorithm for the addition operator + in using *and* instead of *or*.)
 - a. Let nx be the result of calling ToNumber(px). Because of px and py are primitive values evaluation order is not important.
 - b. Let ny be the result of calling ToNumber(py).
 - c. If px is NaN, return **undefined**.
 - d. If py is NaN, return **undefined**.
 - e. If nx and ny are the same number value, return **false**.
 - f. If nx is +0 and ny is -0, return **false**.
 - g. If nx is -0 and ny is +0, return **false**.
 - h. If nx is +∞, return **false**.
 - i. If ny is +∞, return **true**.
 - j. If ny is -∞, return **false**.
 - k. If nx is -∞, return **true**.

Deleted: Call

Deleted: Call

Deleted: Result(1)

Deleted: and

Deleted: or

Deleted: Result(2)

Deleted: go to step 16.

Deleted: Call

Deleted: Result(1)

Deleted: Call ToNumber

Deleted: Result(2)

Deleted: Result(4)

Deleted: Result(5)

Deleted: Result(4)

Deleted: Result(5)

Deleted: Result(4)

Deleted: Result(5)

Deleted: Result(4)

Deleted: Result(5)

Deleted: Result(4)

Deleted: Result(5)

Deleted: Result(5)

Deleted: Result(4)

1. If the mathematical value of *px* is less than the mathematical value of *ny*,—note that these mathematical values are both finite and not both zero—return **true**. Otherwise, return **false**.
4. Else, both *px* and *py* are Strings
 - a. If *py* is a prefix of *px*, return **false**. (A string value *p* is a prefix of string value *q* if *q* can be the result of concatenating *p* and some other string *r*. Note that any string is a prefix of itself, because *r* may be the empty string.)
 - b. If *px* is a prefix of *py*, return **true**.
 - c. Let *k* be the smallest nonnegative integer such that the character at position *k* within *px* is different from the character at position *k* within *py*. (There must be such a *k*, for neither string is a prefix of the other.)
 - d. Let *m* be the integer that is the **code unit** value for the character at position *k* within *px*.
 - e. Let *n* be the integer that is the **code unit** value for the character at position *k* within *py*.
 - f. If *m* < *n*, return **true**. Otherwise, return **false**.

NOTE

The comparison of strings uses a simple lexicographic ordering on sequences of **code unit** values. There is no attempt to use the more complex, semantically oriented definitions of character or string equality and collating order defined in the Unicode specification. Therefore strings that are canonically equal according to the Unicode standard could test as unequal. In effect this algorithm assumes that both strings are already in normalised form.

11.8.6 The instanceof operator

The production *RelationalExpression*: *RelationalExpression instanceof ShiftExpression* is evaluated as follows:

1. Evaluate *RelationalExpression*.
2. Call GetValue(Result(1)).
3. Evaluate *ShiftExpression*.
4. Call GetValue(Result(3)).
5. If Result(4) is not an object, throw a **TypeError** exception.
6. If Result(4) does not have a [[HasInstance]] method, throw a **TypeError** exception.
7. Call the [[HasInstance]] method of Result(4) with parameter Result(2).
8. Return Result(7).

11.8.7 The in operator

The production *RelationalExpression* : *RelationalExpression in ShiftExpression* is evaluated as follows:

1. Evaluate *RelationalExpression*.
2. Call GetValue(Result(1)).
3. Evaluate *ShiftExpression*.
4. Call GetValue(Result(3)).
5. If Result(4) is not an object, throw a **TypeError** exception.
6. Call ToString(Result(2)).
7. Call the [[HasProperty]] method of Result(4) with parameter Result(6).
8. Return Result(7).

11.9 Equality Operators

Syntax

EqualityExpression :

- RelationalExpression*
- EqualityExpression* == *RelationalExpression*
- EqualityExpression* != *RelationalExpression*
- EqualityExpression* === *RelationalExpression*
- EqualityExpression* !== *RelationalExpression*

Deleted: Result(4)

Deleted: Result(5)

Deleted: Result(2)

Deleted: Result(1)

Deleted: Result(1)

Deleted: Result(2)

Deleted: Result(1)

Deleted: Result(2)

Deleted: Result(2)

Deleted: code point

Deleted: Result(1)

Deleted: code point

Deleted: Result(2)

Deleted: code point

Deleted: value

EqualityExpressionNoIn :

RelationalExpressionNoIn

EqualityExpressionNoIn == *RelationalExpressionNoIn*

EqualityExpressionNoIn != *RelationalExpressionNoIn*

EqualityExpressionNoIn === *RelationalExpressionNoIn*

EqualityExpressionNoIn !== *RelationalExpressionNoIn*

Semantics

The result of evaluating an equality operator is always of type Boolean, reflecting whether the relationship named by the operator holds between its two operands.

The *EqualityExpressionNoIn* productions are evaluated in the same manner as the *EqualityExpression* productions except that the contained *EqualityExpressionNoIn* and *RelationalExpressionNoIn* are evaluated instead of the contained *EqualityExpression* and *RelationalExpression*, respectively.

11.9.1 The Equals Operator (==)

The production *EqualityExpression* : *EqualityExpression* == *RelationalExpression* is evaluated as follows:

1. Evaluate *EqualityExpression*.
2. Call GetValue(Result(1)).
3. Evaluate *RelationalExpression*.
4. Call GetValue(Result(3)).
5. Perform the comparison Result(4) == Result(2). (see 11.9.3).
6. Return Result(5).

11.9.2 The Does-not-equals Operator (!=)

The production *EqualityExpression* : *EqualityExpression* != *RelationalExpression* is evaluated as follows:

1. Evaluate *EqualityExpression*.
2. Call GetValue(Result(1)).
3. Evaluate *RelationalExpression*.
4. Call GetValue(Result(3)).
5. Perform the comparison Result(4) == Result(2). (see 11.9.3).
6. If Result(5) is **true**, return **false**. Otherwise, return **true**.

11.9.3 The Abstract Equality Comparison Algorithm

The comparison $x == y$, where x and y are values, produces **true** or **false**. Such a comparison is performed as follows:

1. If Type(x) is different from Type(y), go to step 14.
2. If Type(x) is Undefined, return **true**.
3. If Type(x) is Null, return **true**.
4. If Type(x) is not Number, go to step 11.
5. If x is NaN, return **false**.
6. If y is NaN, return **false**.
7. If x is the same number value as y , return **true**.
8. If x is +0 and y is -0, return **true**.
9. If x is -0 and y is +0, return **true**.
10. Return **false**.
11. If Type(x) is String, then return **true** if x and y are exactly the same sequence of characters (same length and same characters in corresponding positions). Otherwise, return **false**.
12. If Type(x) is Boolean, return **true** if x and y are both **true** or both **false**. Otherwise, return **false**.
13. Return **true** if x and y refer to the same object. Otherwise, return **false**.
14. If x is **null** and y is **undefined**, return **true**.
15. If x is **undefined** and y is **null**, return **true**.
16. If Type(x) is Number and Type(y) is String, return the result of the comparison $x == \text{ToNumber}(y)$.

Deleted: or if they refer to objects joined to each other (see 13.1.2)

17. If `Type(x)` is `String` and `Type(y)` is `Number`, return the result of the comparison `ToNumber(x) == y`.
18. If `Type(x)` is `Boolean`, return the result of the comparison `ToNumber(x) == y`.
19. If `Type(y)` is `Boolean`, return the result of the comparison `x == ToNumber(y)`.
20. If `Type(x)` is either `String` or `Number` and `Type(y)` is `Object`, return the result of the comparison `x == ToPrimitive(y)`.
21. If `Type(x)` is `Object` and `Type(y)` is either `String` or `Number`, return the result of the comparison `ToPrimitive(x) == y`.
22. Return **false**.

NOTE

Given the above definition of equality:

String comparison can be forced by: `" " + a == " " + b`.

Numeric comparison can be forced by: `a - 0 == b - 0`.

Boolean comparison can be forced by: `!a == !b`.

The equality operators maintain the following invariants:

A != B is equivalent to **!(A == B)**.

A == B is equivalent to **B == A**, except in the order of evaluation of **A** and **B**.

The equality operator is not always transitive. For example, there might be two distinct `String` objects, each representing the same string value; each `String` object would be considered equal to the string value by the `==` operator, but the two `String` objects would not be equal to each other.

Comparison of strings uses a simple equality test on sequences of *code unit* values. There is no attempt to use the more complex, semantically oriented definitions of character or string equality and collating order defined in the Unicode 2.0 specification. Therefore strings that are canonically equal according to the Unicode standard could test as unequal. In effect this algorithm assumes that both strings are already in normalised form.

Deleted: code point

Deleted: value

11.9.4 The Strict Equals Operator (`===`)

The production `EqualityExpression : EqualityExpression === RelationalExpression` is evaluated as follows:

1. Evaluate `EqualityExpression`.
2. Call `GetValue(Result(1))`.
3. Evaluate `RelationalExpression`.
4. Call `GetValue(Result(3))`.
5. Perform the comparison `Result(4) === Result(2)`. (See below.)
6. Return `Result(5)`.

11.9.5 The Strict Does-not-equal Operator (`!==`)

The production `EqualityExpression : EqualityExpression !== RelationalExpression` is evaluated as follows:

1. Evaluate `EqualityExpression`.
2. Call `GetValue(Result(1))`.
3. Evaluate `RelationalExpression`.
4. Call `GetValue(Result(3))`.
5. Perform the comparison `Result(4) === Result(2)`. (See below.)
6. If `Result(5)` is **true**, return **false**. Otherwise, return **true**.

11.9.6 The Strict Equality Comparison Algorithm

The comparison `x === y`, where `x` and `y` are values, produces **true** or **false**. Such a comparison is performed as follows:

1. If `Type(x)` is different from `Type(y)`, return **false**.
2. If `Type(x)` is `Undefined`, return **true**.

3. If `Type(x)` is `Null`, return **true**.
4. If `Type(x)` is not `Number`, go to step 11.
5. If `x` is `NaN`, return **false**.
6. If `y` is `NaN`, return **false**.
7. If `x` is the same number value as `y`, return **true**.
8. If `x` is `+0` and `y` is `-0`, return **true**.
9. If `x` is `-0` and `y` is `+0`, return **true**.
10. Return **false**.
11. If `Type(x)` is `String`, then return **true** if `x` and `y` are exactly the same sequence of characters (same length and same characters in corresponding positions); otherwise, return **false**.
12. If `Type(x)` is `Boolean`, return **true** if `x` and `y` are both **true** or both **false**; otherwise, return **false**.
13. Return **true** if `x` and `y` refer to the same object. Otherwise, return **false**.

Deleted: or if they refer to objects joined to each other (see 13.1.2)

Deleted: <#>

11.10 Binary Bitwise Operators

Syntax

BitwiseANDExpression :

EqualityExpression
BitwiseANDExpression & *EqualityExpression*

BitwiseANDExpressionNoIn :

EqualityExpressionNoIn
BitwiseANDExpressionNoIn & *EqualityExpressionNoIn*

BitwiseXORExpression :

BitwiseANDExpression
BitwiseXORExpression ^ *BitwiseANDExpression*

BitwiseXORExpressionNoIn :

BitwiseANDExpressionNoIn
BitwiseXORExpressionNoIn ^ *BitwiseANDExpressionNoIn*

BitwiseORExpression :

BitwiseXORExpression
BitwiseORExpression | *BitwiseXORExpression*

BitwiseORExpressionNoIn :

BitwiseXORExpressionNoIn
BitwiseORExpressionNoIn | *BitwiseXORExpressionNoIn*

Semantics

The production $A : A @ B$, where $@$ is one of the bitwise operators in the productions above, is evaluated as follows:

1. Evaluate A .
2. Call `GetValue(Result(1))`.
3. Evaluate B .
4. Call `GetValue(Result(3))`.
5. Call `ToInt32(Result(2))`.
6. Call `ToInt32(Result(4))`.
7. Apply the bitwise operator $@$ to `Result(5)` and `Result(6)`. The result is a signed 32 bit integer.
8. Return `Result(7)`.

11.11 Binary Logical Operators

Syntax

LogicalANDExpression :

BitwiseORExpression
LogicalANDExpression && *BitwiseORExpression*

LogicalANDExpressionNoIn :
BitwiseORExpressionNoIn
LogicalANDExpressionNoIn && *BitwiseORExpressionNoIn*

LogicalORExpression :
LogicalANDExpression
LogicalORExpression || *LogicalANDExpression*

LogicalORExpressionNoIn :
LogicalANDExpressionNoIn
LogicalORExpressionNoIn || *LogicalANDExpressionNoIn*

Semantics

The production *LogicalANDExpression* : *LogicalANDExpression* && *BitwiseORExpression* is evaluated as follows:

1. Evaluate *LogicalANDExpression*.
2. Call GetValue(Result(1)).
3. Call ToBoolean(Result(2)).
4. If Result(3) is **false**, return Result(2).
5. Evaluate *BitwiseORExpression*.
6. Call GetValue(Result(5)).
7. Return Result(6).

The production *LogicalORExpression* : *LogicalORExpression* || *LogicalANDExpression* is evaluated as follows:

1. Evaluate *LogicalORExpression*.
2. Call GetValue(Result(1)).
3. Call ToBoolean(Result(2)).
4. If Result(3) is **true**, return Result(2).
5. Evaluate *LogicalANDExpression*.
6. Call GetValue(Result(5)).
7. Return Result(6).

The *LogicalANDExpressionNoIn* and *LogicalORExpressionNoIn* productions are evaluated in the same manner as the *LogicalANDExpression* and *LogicalORExpression* productions except that the contained *LogicalANDExpressionNoIn*, *BitwiseORExpressionNoIn* and *LogicalORExpressionNoIn* are evaluated instead of the contained *LogicalANDExpression*, *BitwiseORExpression* and *LogicalORExpression*, respectively.

NOTE

The value produced by a && or || operator is not necessarily of type Boolean. The value produced will always be the value of one of the two operand expressions.

11.12 Conditional Operator (? :)

Syntax

ConditionalExpression :
LogicalORExpression
LogicalORExpression ? *AssignmentExpression* : *AssignmentExpression*

ConditionalExpressionNoIn :
LogicalORExpressionNoIn
LogicalORExpressionNoIn ? *AssignmentExpression* : *AssignmentExpressionNoIn*

Semantics

The production *ConditionalExpression* : *LogicalORExpression* ? *AssignmentExpression* : *AssignmentExpression* is evaluated as follows:

1. Evaluate *LogicalORExpression*.
2. Call `GetValue(Result(1))`.
3. Call `ToBoolean(Result(2))`.
4. If `Result(3)` is **false**, go to step 8.
5. Evaluate the first *AssignmentExpression*.
6. Call `GetValue(Result(5))`.
7. Return `Result(6)`.
8. Evaluate the second *AssignmentExpression*.
9. Call `GetValue(Result(8))`.
10. Return `Result(9)`.

The *ConditionalExpressionNoIn* production is evaluated in the same manner as the *ConditionalExpression* production except that the contained *LogicalORExpressionNoIn*, *AssignmentExpression* and *AssignmentExpressionNoIn* are evaluated instead of the contained *LogicalORExpression*, first *AssignmentExpression* and second *AssignmentExpression*, respectively.

NOTE

The grammar for a *ConditionalExpression* in ECMAScript is a little bit different from that in C and Java, which each allow the second subexpression to be an *Expression* but restrict the third expression to be a *ConditionalExpression*. The motivation for this difference in ECMAScript is to allow an assignment expression to be governed by either arm of a conditional and to eliminate the confusing and fairly useless case of a comma expression as the centre expression.

11.13 Assignment Operators

Syntax

AssignmentExpression :

ConditionalExpression
LeftHandSideExpression *AssignmentOperator* *AssignmentExpression*

AssignmentExpressionNoIn :

ConditionalExpressionNoIn
LeftHandSideExpression *AssignmentOperator* *AssignmentExpressionNoIn*

AssignmentOperator : one of

= * = / = % = + = - = << = >> = >>> = & = ^ = |=

Semantics

The *AssignmentExpressionNoIn* productions are evaluated in the same manner as the *AssignmentExpression* productions except that the contained *ConditionalExpressionNoIn* and *AssignmentExpressionNoIn* are evaluated instead of the contained *ConditionalExpression* and *AssignmentExpression*, respectively.

11.13.1 Simple Assignment (=)

The production *AssignmentExpression* : *LeftHandSideExpression* = *AssignmentExpression* is evaluated as follows:

1. Evaluate *LeftHandSideExpression*.
2. Evaluate *AssignmentExpression*.
3. Call `GetValue(Result(2))`.
4. Call `PutValue(Result(1), Result(3))`.
5. Return `Result(3)`.

NOTE

When an assignment occurs within strict mode code, its *LeftHandSide* must not evaluate to an unresolvable reference. If it does a **ReferenceError** exception is thrown upon assignment. The *LeftHandSide* also may not be a reference to a property with the attribute value `{[[Writable]]: false}` nor to a non-existent property of an object whose `[[Extensible]]` property has the value **false**. In these cases a **TypeError** exception is thrown.

11.13.2 Compound Assignment (op=)

The production *AssignmentExpression* : *LeftHandSideExpression* @ = *AssignmentExpression*, where @ represents one of the operators indicated above, is evaluated as follows:

1. Evaluate *LeftHandSideExpression*.
2. Call GetValue(Result(1)).
3. Evaluate *AssignmentExpression*.
4. Call GetValue(Result(3)).
5. Apply operator @ to Result(2) and Result(4).
6. Call PutValue(Result(1), Result(5)).
7. Return Result(5).

NOTE

See NOTE 11.13.1.

11.14 Comma Operator (,)

Syntax

Expression :

AssignmentExpression
Expression , *AssignmentExpression*

ExpressionNoIn :

AssignmentExpressionNoIn
ExpressionNoIn , *AssignmentExpressionNoIn*

Semantics

The production *Expression* : *Expression* , *AssignmentExpression* is evaluated as follows:

1. Evaluate *Expression*.
2. Call GetValue(Result(1)).
3. Evaluate *AssignmentExpression*.
4. Call GetValue(Result(3)).
5. Return Result(4).

The *ExpressionNoIn* production is evaluated in the same manner as the *Expression* production except that the contained *ExpressionNoIn* and *AssignmentExpressionNoIn* are evaluated instead of the contained *Expression* and *AssignmentExpression*, respectively.

12 Statements

Syntax

Statement :

Block
VariableStatement
EmptyStatement
ExpressionStatement
IfStatement
IterationStatement
ContinueStatement
BreakStatement
ReturnStatement
WithStatement
LabelledStatement
SwitchStatement
ThrowStatement
TryStatement
DebuggerStatement

Semantics

A *Statement* can be part of a *LabelledStatement*, which itself can be part of a *LabelledStatement*, and so on. The labels introduced this way are collectively referred to as the “current label set” when describing the semantics of individual statements. A *LabelledStatement* has no semantic meaning other than the introduction of a label to a *label set*. The label set of an *IterationStatement* or a *SwitchStatement* initially contains the single element **empty**. The label set of any other statement is initially empty.

Note:

TBD: Implementations have been known to support *FunctionDeclaration* in a *Statement*; however there is no uniform support. It is impossible to reconcile their differing semantics, and hence this specification excludes their possibility.

12.1 Block

Syntax

Block :

{ *StatementList*_{opt} }

StatementList :

Statement
StatementList *Statement*

Semantics

The production *Block* : { } is evaluated as follows:

1. Return (**normal**, **empty**, **empty**).

The production *Block* : { *StatementList* } is evaluated as follows:

1. Evaluate *StatementList*.
2. Return Result(1).

The production *StatementList* : *Statement* is evaluated as follows:

1. Evaluate *Statement*.
2. If an exception was thrown, return (**throw**, *V*, **empty**) where *V* is the exception. (Execution now proceeds as if no exception were thrown.)
3. Return Result(1).

The production *StatementList* : *StatementList* *Statement* is evaluated as follows:

1. Evaluate *StatementList*.
2. If Result(1) is an abrupt completion, return Result(1).
3. Evaluate *Statement*.
4. If an exception was thrown, return (**throw**, *V*, empty) where *V* is the exception. (Execution now proceeds as if no exception were thrown.)
5. If Result(3).value is **empty**, let *V* = Result(1).value, otherwise let *V* = Result(3).value.
6. Return (Result(3).type, *V*, Result(3).target).

12.2 Variable statement

Syntax

VariableStatement :

var *VariableDeclarationList* ;

VariableDeclarationList :

VariableDeclaration
VariableDeclarationList , *VariableDeclaration*

VariableDeclarationListNoIn :

VariableDeclarationNoIn
VariableDeclarationListNoIn , *VariableDeclarationNoIn*

VariableDeclaration :

Identifier *Initialiser*_{opt}

VariableDeclarationNoIn :

Identifier *InitialiserNoIn*_{opt}

Initialiser :

= *AssignmentExpression*

InitialiserNoIn :

= *AssignmentExpressionNoIn*

Description

A variable statement declares variables that are created as defined in section 10.6. Variables are initialised to **undefined** when created. A variable with an *Initialiser* is assigned the value of its *AssignmentExpression* when the *VariableStatement* is executed, not when the variable is created.

Semantics

The production *VariableStatement* : **var** *VariableDeclarationList* ; is evaluated as follows:

1. Evaluate *VariableDeclarationList*.
2. Return (**normal**, **empty**, **empty**).

The production *VariableDeclarationList* : *VariableDeclaration* is evaluated as follows:

1. Evaluate *VariableDeclaration*.

The production *VariableDeclarationList* : *VariableDeclarationList* , *VariableDeclaration* is evaluated as follows:

1. Evaluate *VariableDeclarationList*.
2. Evaluate *VariableDeclaration*.

The production *VariableDeclaration* : *Identifier* is evaluated as follows:

1. Return a string value containing the same sequence of characters as in the *Identifier*.

The production *VariableDeclaration* : *Identifier* *Initialiser* is evaluated as follows:

Deleted: If the

Deleted: occurs inside a *FunctionDeclaration*, the variables are defined with function-local scope in that function, as described in s10.1.3. Otherwise, they are defined with global scope (that is, they are created as members of the global object, as described in 10.1.3) using property attributes { DontDelete }. Variables are created when the execution scope is entered. A *Block* does not define a new execution scope. Only *Program* and *FunctionDeclaration* produce a new scope. Variables

1. If the *VariableDeclaration* occurs in strict mode code, let *strict* be **true**, otherwise let *strict* be **false**.
2. Let *rhs* be the result of evaluating *Initialiser*.
3. Let *value* be GetValue(*rhs*).
4. Call the SetMutableBinding(*N,V,S*) concrete method of the execution context's *VariableEnvironment* passing the *Identifier*, *value*, and *strict* as arguments.
5. Return a string value containing the same sequence of characters as in the *Identifier*.

Deleted: Evaluate *Identifier* as described in 11.1.2.

Deleted: Evaluate

Deleted: Call

Deleted: Result(2)

Deleted: Call PutValue(Result(1), Result(3))

The production *Initialiser* := *AssignmentExpression* is evaluated as follows:

1. Evaluate *AssignmentExpression*.
2. Return Result(1).

The *VariableDeclarationListNoIn*, *VariableDeclarationNoIn* and *InitialiserNoIn* productions are evaluated in the same manner as the *VariableDeclarationList*, *VariableDeclaration* and *Initialiser* productions except that the contained *VariableDeclarationListNoIn*, *VariableDeclarationNoIn*, *InitialiserNoIn* and *AssignmentExpressionNoIn* are evaluated instead of the contained *VariableDeclarationList*, *VariableDeclaration*, *Initialiser* and *AssignmentExpression*, respectively.

12.2.1 Strict Mode Restrictions

It is an **EvalError** if a *VariableDeclaration* or *VariableDeclarationNoIn* occurs within strict code and its *Identifier* is **"eval"**.

12.3 Empty Statement

Syntax

EmptyStatement :
;

Semantics

The production *EmptyStatement* : ; is evaluated as follows:

1. Return (**normal**, **empty**, **empty**).

12.4 Expression Statement

Syntax

ExpressionStatement :
[lookahead ∉ {**{**, **function**}] *Expression* ;

Note that an *ExpressionStatement* cannot start with an opening curly brace because that might make it ambiguous with a *Block*. Also, an *ExpressionStatement* cannot start with the **function** keyword because that might make it ambiguous with a *FunctionDeclaration*.

Semantics

The production *ExpressionStatement* : [lookahead ∉ {**{**, **function**}] *Expression* ; is evaluated as follows:

1. Evaluate *Expression*.
2. Call GetValue(Result(1)).
3. Return (**normal**, Result(2), **empty**).

12.5 The if Statement

Syntax

IfStatement :
if (*Expression*) *Statement* **else** *Statement*
if (*Expression*) *Statement*

Each **else** for which the choice of associated **if** is ambiguous shall be associated with the nearest possible **if** that would otherwise have no corresponding **else**.

Semantics

The production *IfStatement* : **if** (*Expression*) *Statement* **else** *Statement* is evaluated as follows:

1. Evaluate *Expression*.
2. Call GetValue(Result(1)).
3. Call ToBoolean(Result(2)).
4. If Result(3) is **false**, go to step 7.
5. Evaluate the first *Statement*.
6. Return Result(5).
7. Evaluate the second *Statement*.
8. Return Result(7).

The production *IfStatement* : **if** (*Expression*) *Statement* is evaluated as follows:

1. Evaluate *Expression*.
2. Call GetValue(Result(1)).
3. Call ToBoolean(Result(2)).
4. If Result(3) is **false**, return (**normal**, **empty**, **empty**).
5. Evaluate *Statement*.
6. Return Result(5).

12.6 Iteration Statements

An iteration statement consists of a *header* (which consists of a keyword and a parenthesised control construct) and a *body* (which consists of a *Statement*).

Syntax

IterationStatement :

```
do Statement while ( Expression );
while ( Expression ) Statement
for ( ExpressionNoInopt; Expressionopt; Expressionopt ) Statement
for ( var VariableDeclarationListNoIn; Expressionopt; Expressionopt ) Statement
for ( LeftHandSideExpression in Expression ) Statement
for ( var VariableDeclarationNoIn in Expression ) Statement
```

12.6.1 The do-while Statement

The production **do** *Statement* **while** (*Expression*) ; is evaluated as follows:

1. Let *V* = **empty**.
2. Evaluate *Statement*.
3. If Result(2).value is not **empty**, let *V* = Result(2).value.
4. If Result(2).type is **continue** and Result(2).target is in the current label set, go to step 7.
5. If Result(2).type is **break** and Result(2).target is in the current label set, return (**normal**, *V*, **empty**).
6. If Result(2) is an abrupt completion, return Result(2).
7. Evaluate *Expression*.
8. Call GetValue(Result(7)).
9. Call ToBoolean(Result(8)).
10. If Result(9) is **true**, go to step 2.
11. Return (**normal**, *V*, **empty**);

12.6.2 The while statement

The production *IterationStatement* : **while** (*Expression*) *Statement* is evaluated as follows:

1. Let *V* = **empty**.
2. Evaluate *Expression*.
3. Call GetValue(Result(2)).
4. Call ToBoolean(Result(3)).
5. If Result(4) is **false**, return (**normal**, *V*, **empty**).
6. Evaluate *Statement*.
7. If Result(6).value is not **empty**, let *V* = Result(6).value.
8. If Result(6).type is **continue** and Result(6).target is in the current label set, go to 2.

Deleted: 12.5.1 Strict Mode Restrictions
In strict mode code a *Statement* that is part of an *IfStatement* production may not be a *VariableStatement* nor may it be a *LabelledStatement* whose *Statement* production is a *VariableStatement*. The *LabelledStatement* restriction also applies if such an *VariableStatement* is preceded by multiple labels.

Deleted: Strict Mode Restrictions
A *Statement* that is an element of an *IterationStatement* production may not be a *VariableStatement* nor may it be a *LabelledStatement* whose *Statement* production is a *VariableStatement*. The *LabelledStatement* restriction also applies if such an *VariableStatement* is preceded by multiple labels.

9. If Result(6).type is **break** and Result(6).target is in the current label set, return (**normal**, *V*, **empty**).
10. If Result(6) is an abrupt completion, return Result(6).
11. Go to step 2.

12.6.3 The **for** Statement

The production *IterationStatement* : **for** (*ExpressionNoIn_{opt}* ; *Expression_{opt}* ; *Expression_{opt}*) *Statement* is evaluated as follows:

1. If *ExpressionNoIn* is not present, go to step 4.
2. Evaluate *ExpressionNoIn*.
3. Call GetValue(Result(2)). (This value is not used.)
4. Let *V* = **empty**.
5. If the first *Expression* is not present, go to step 10.
6. Evaluate the first *Expression*.
7. Call GetValue(Result(6)).
8. Call ToBoolean(Result(7)).
9. If Result(8) is **false**, go to step 19.
10. Evaluate *Statement*.
11. If Result(10).value is not **empty**, let *V* = Result(10).value
12. If Result(10).type is **break** and Result(10).target is in the current label set, go to step 19.
13. If Result(10).type is **continue** and Result(10).target is in the current label set, go to step 15.
14. If Result(10) is an abrupt completion, return Result(10).
15. If the second *Expression* is not present, go to step 5.
16. Evaluate the second *Expression*.
17. Call GetValue(Result(16)). (This value is not used.)
18. Go to step 5.
19. Return (**normal**, *V*, **empty**).

Deleted: the first *Expression*

The production *IterationStatement* : **for** (**var** *VariableDeclarationListNoIn* ; *Expression_{opt}* ; *Expression_{opt}*) *Statement* is evaluated as follows:

1. Evaluate *VariableDeclarationListNoIn*.
2. Let *V* = **empty**.
3. If the first *Expression* is not present, go to step 8.
4. Evaluate the first *Expression*.
5. Call GetValue(Result(4)).
6. Call ToBoolean(Result(5)).
7. If Result(6) is **false**, go to step 17.
8. Evaluate *Statement*.
9. If Result(8).value is not **empty**, let *V* = Result(8).value.
10. If Result(8).type is **break** and Result(8).target is in the current label set, go to step 17.
11. If Result(8).type is **continue** and Result(8).target is in the current label set, go to step 13.
12. If Result(8) is an abrupt completion, return Result(8).
13. If the second *Expression* is not present, go to step 3.
14. Evaluate the second *Expression*.
15. Call GetValue(Result(14)). (This value is not used.)
16. Go to step 3.
17. Return (**normal**, *V*, **empty**).

Deleted: 14

12.6.4 The **for-in** Statement

The production *IterationStatement* : **for** (*LeftHandSideExpression in Expression*) *Statement* is evaluated as follows:

1. Evaluate the *Expression*.
2. Call GetValue(Result(1)).
3. If Result(2) is **null** or **undefined**, return (**normal**, *V*, **empty**).
4. Call ToObject(Result(2)).
5. Let *V* = **empty**.

6. Get the name of the next property of Result(4) whose `[[Enumerable]]` attribute is `true`. If there is no such property, go to step 15.
7. Evaluate the *LeftHandSideExpression* (it may be evaluated repeatedly).
8. Call `PutValue(Result(7), Result(6))`.
9. Evaluate *Statement*.
10. If Result(9).value is not `empty`, let $V = \text{Result}(9).\text{value}$.
11. If Result(9).type is `break` and Result(9).target is in the current label set, go to step 15.
12. If Result(9).type is `continue` and Result(9).target is in the current label set, go to step 6.
13. If Result(9) is an abrupt completion, return Result(9).
14. Go to step 6.
15. Return (`normal`, V , `empty`).

The production *IterationStatement* : `for (var VariableDeclarationNoIn in Expression) Statement` is evaluated as follows:

1. Evaluate *VariableDeclarationNoIn*.
2. Evaluate *Expression*.
3. Call `GetValue(Result(2))`.
4. If Result(3) is `null` or `undefined`, return (`normal`, V , `empty`).
5. Call `ToObject(Result(3))`.
6. Let $V = \text{empty}$.
7. Get the name of the next property of Result(5) whose `[[Enumerable]]` attribute is `true`. If there is no such property, go to step 16.
8. Evaluate Result(1) as if it were an Identifier; see step 7 from the previous algorithm (it may be evaluated repeatedly).
9. Call `PutValue(Result(7), Result(8))`.
10. Evaluate *Statement*.
11. If Result(10).value is not `empty`, let $V = \text{Result}(10).\text{value}$.
12. If Result(10).type is `break` and Result(10).target is in the current label set, go to step 16.
13. If Result(10).type is `continue` and Result(10).target is in the current label set, go to step 7.
14. If Result(9) is an abrupt completion, return Result(9).
15. Go to step 7.
16. Return (`normal`, V , `empty`).

The mechanics of enumerating the properties (step 5 in the first algorithm, step 6 in the second) is not specified. Properties of the object being enumerated may be deleted during enumeration. If a property that has not yet been visited during enumeration is deleted, then it will not be visited. If new properties are added to the object being enumerated during enumeration, the newly added properties are guaranteed not to be visited in the active enumeration.

Enumerating the properties of an object includes enumerating properties of its prototype, and the prototype of the prototype, and so on, recursively; but a property of a prototype is not enumerated if it is “shadowed” because some previous object in the prototype chain has a property with the same name.

NOTE
See NOTE 11.13.1.

12.7 The continue Statement

Syntax

ContinueStatement :
`continue` [no *LineTerminator* here] *Identifier*_{opt} ;

Semantics

A program is considered syntactically incorrect if either of the following are true:

The program contains a `continue` statement without the optional *Identifier*, which is not nested, directly or indirectly (but not crossing function boundaries), within an *IterationStatement*.

The program contains a `continue` statement with the optional *Identifier*, where *Identifier* does not appear in the label set of an enclosing (but not crossing function boundaries) *IterationStatement*.

Deleted: 3

Deleted: that doesn't have the DontEnum attribute

Deleted: 14

Deleted: 6

Deleted: 5

Deleted: 8

Deleted: 8

Deleted: 8

Deleted: 8

Deleted: 14

Deleted: 8

Deleted: 8

Deleted: 5

Deleted: 8

Deleted: 8

Deleted: 5

Deleted: 4

Deleted: that doesn't have the DontEnum attribute

Deleted: 15

Deleted: 0

Deleted: yes,

Deleted: 6

Deleted: 9

Deleted: 9

Deleted: 9

Deleted: 9

Deleted: 15

Deleted: 9

Deleted: 9

Deleted: 6

Deleted: 8

Deleted: 8

Deleted: 6

Deleted: implementation dependent

Deleted: The order of enumeration is defined by the object.

Deleted: not

A *ContinueStatement* without an *Identifier* is evaluated as follows:

1. Return (**continue**, **empty**, **empty**).

A *ContinueStatement* with the optional *Identifier* is evaluated as follows:

1. Return (**continue**, **empty**, *Identifier*).

12.8 The **break** Statement

Syntax

BreakStatement :

break [no *LineTerminator* here] *Identifier*_{opt} ;

Semantics

A program is considered syntactically incorrect if either of the following are true:

The program contains a **break** statement without the optional *Identifier*, which is not nested, directly or indirectly (but not crossing function boundaries), within an *IterationStatement* or a *SwitchStatement*.

The program contains a **break** statement with the optional *Identifier*, where *Identifier* does not appear in the label set of an enclosing (but not crossing function boundaries) *Statement*.

A *BreakStatement* without an *Identifier* is evaluated as follows:

1. Return (**break**, **empty**, **empty**).

A *BreakStatement* with an *Identifier* is evaluated as follows:

1. Return (**break**, **empty**, *Identifier*).

12.9 The **return** Statement

Syntax

ReturnStatement :

return [no *LineTerminator* here] *Expression*_{opt} ;

Semantics

An ECMAScript program is considered syntactically incorrect if it contains a **return** statement that is not within a *FunctionBody*. A **return** statement causes a function to cease execution and return a value to the caller. If *Expression* is omitted, the return value is **undefined**. Otherwise, the return value is the value of *Expression*.

The production *ReturnStatement* : **return** [no *LineTerminator* here] *Expression*_{opt} ; is evaluated as:

1. If the *Expression* is not present, return (**return**, **undefined**, **empty**).
2. Evaluate *Expression*.
3. Call `GetValue(Result(2))`.
4. Return (**return**, `Result(3)`, **empty**).

12.10 The **with** Statement

Syntax

WithStatement :

with (*Expression*) *Statement*

Description

The **with** statement adds a computed object **environment record** to the **lexical environment** of the current execution context, then executes a statement with this augmented scope chain, then restores the **lexical environment**.

Semantics

Deleted: front of the scope chain

Deleted: scope chain

The production *WithStatement* : **with** (*Expression*) *Statement* is evaluated as follows:

1. Let *val* be the result of evaluating *Expression*.
2. Let *obj* be **ToObject**(**GetValue**(*val*)).
3. Let *oldEnv* be the running execution context's **LexicalEnvironment**.
4. Let *newEnv* be the result of calling **NewObjectEnvironmentRecord**(**O.E**) passing *obj* and *oldEnv* as the arguments.
5. Set the running execution context's **LexicalEnvironment** to *newEnv*.
6. Let *C* be the result of evaluating *Statement* but if an exception is thrown during the evaluation, let *C* be (**throw**, *V*, **empty**), where *V* is the exception. (Execution now proceeds as if no exception were thrown.)
7. Set the running execution context's **Lexical Environment** to *oldEnv*.
8. Return *C*.

NOTE

No matter how control leaves the embedded '*Statement*', whether normally or by some form of abrupt completion or exception, the **LexicalEnvironment** is always restored to its former state.

12.10.1 Strict Mode Restrictions

Strict mode code may not include a *WithStatement*. The occurrence of a *WithStatement* in such a context is treated as a syntax error.

12.11 The switch Statement

Syntax

SwitchStatement :

switch (*Expression*) *CaseBlock*

CaseBlock :

{ *CaseClauses*_{opt} }
{ *CaseClauses*_{opt} **DefaultClause** *CaseClauses*_{opt} }

CaseClauses :

CaseClause
CaseClauses *CaseClause*

CaseClause :

case *Expression* : *StatementList*_{opt}

DefaultClause :

default : *StatementList*_{opt}

Semantics

The production *SwitchStatement* : **switch** (*Expression*) *CaseBlock* is evaluated as follows:

1. Evaluate *Expression*.
2. Call **GetValue**(**Result**(1)).
3. Evaluate *CaseBlock*, passing it **Result**(2) as a parameter.
4. If **Result**(3).type is **break** and **Result**(3).target is in the current label set, return (**normal**, **Result**(3).value, **empty**).
5. Return **Result**(3).

The production *CaseBlock* : { *CaseClauses*_{opt} } is given an input parameter, *input*, and is evaluated as follows:

1. Let *V* = **empty**.
2. Let *A* be the list of *CaseClause* items in source text order.
3. Let *C* be the next *CaseClause* in *A*. If there is no such *CaseClause*, then go to step 16.
4. Evaluate *C*.
5. If *input* is not equal to **Result**(4) as defined by the **!==** operator, then go to step 3.

Deleted: Evaluate

Deleted: Call

Deleted: *Result*(1)

Deleted: Call **ToObject**(**Result**(2)).

Deleted: Add **Result**(3) to the front of the scope chain.

Deleted: Evaluate

Deleted: using the augmented scope chain from step 4.¶
Let *C* be **Result**(5). If an exception was thrown in step 5

Deleted: Remove **Result**(3) from the front of the scope chain

Deleted: *scope chain*

6. If *C* does not have a *StatementList*, then go to step 10.
7. Evaluate *C*'s *StatementList* and let *R* be the result.
8. If *R* is an abrupt completion, then return *R*.
9. Let *V* = *R*.value.
10. Let *C* be the next *CaseClause* in *A*. If there is no such *CaseClause*, then go to step 16.
11. If *C* does not have a *StatementList*, then go to step 10.
12. Evaluate *C*'s *StatementList* and let *R* be the result.
13. If *R*.value is not **empty**, then let *V* = *R*.value.
14. If *R* is an abrupt completion, then return (*R*.type, *V*, *R*.target).
15. Go to step 10.
16. Return (**normal**, *V*, **empty**).

The production *CaseBlock* : { *CaseClauses*_{opt} *DefaultClause* *CaseClauses*_{opt} } is given an input parameter, *input*, and is evaluated as follows:

1. Let *V* = **empty**.
2. Let *A* be the list of *CaseClause* items in the first *CaseClauses*, in source text order.
3. Let *C* be the next *CaseClause* in *A*. If there is no such *CaseClause*, then go to step 11.
4. Evaluate *C*.
5. If *input* is not equal to Result(4) as defined by the **!**== operator, then go to step 3.
6. If *C* does not have a *StatementList*, then go to step 20.
7. Evaluate *C*'s *StatementList* and let *R* be the result.
8. If *R* is an abrupt completion, then return *R*.
9. Let *V* = *R*.value.
10. Go to step 20.
11. Let *B* be the list of *CaseClause* items in the second *CaseClauses*, in source text order.
12. Let *C* be the next *CaseClause* in *B*. If there is no such *CaseClause*, then go to step 26.
13. Evaluate *C*.
14. If *input* is not equal to Result(13) as defined by the **!**== operator, then go to step 12.
15. If *C* does not have a *StatementList*, then go to step 31.
16. Evaluate *C*'s *StatementList* and let *R* be the result.
17. If *R* is an abrupt completion, then return *R*.
18. Let *V* = *R*.value.
19. Go to step 31.
20. Let *C* be the next *CaseClause* in *A*. If there is no such *CaseClause*, then go to step 26.
21. If *C* does not have a *StatementList*, then go to step 20.
22. Evaluate *C*'s *StatementList* and let *R* be the result.
23. If *R*.value is not **empty**, then let *V* = *R*.value.
24. If *R* is an abrupt completion, then return (*R*.type, *V*, *R*.target).
25. Go to step 20.
26. If the *DefaultClause* does not have a *StatementList*, then go to step 30.
27. Evaluate the *DefaultClause*'s *StatementList* and let *R* be the result.
28. If *R*.value is not **empty**, then let *V* = *R*.value.
29. If *R* is an abrupt completion, then return (*R*.type, *V*, *R*.target).
30. Let *B* be the list of *CaseClause* items in the second *CaseClauses*, in source text order.
31. Let *C* be the next *CaseClause* in *B*. If there is no such *CaseClause*, then go to step 37.
32. If *C* does not have a *StatementList*, then go to step 31.
33. Evaluate *C*'s *StatementList* and let *R* be the result.
34. If *R*.value is not **empty**, then let *V* = *R*.value.
35. If *R* is an abrupt completion, then return (*R*.type, *V*, *R*.target).
36. Go to step 31.
37. Return (**normal**, *V*, **empty**).

The production *CaseClause* : **case** *Expression* : *StatementList*_{opt} is evaluated as follows:

1. Evaluate *Expression*.
2. Call GetValue(Result(1)).
3. Return Result(2).

NOTE

Deleted: The production *CaseBlock* : { *CaseClauses* *DefaultClause* *CaseClauses* } is given an input parameter, *input*, and is evaluated as follows:¶
<#>Let *A* be the list of *CaseClause* items in the first *CaseClauses*, in source text order.¶
<#>For the next *CaseClause* in *A*, evaluate *CaseClause*. If there is no such *CaseClause*, go to step 7.¶
<#>If *input* is not equal to Result(2), as defined by the **!**== operator, go to step 2.¶
<#>Evaluate the *StatementList* of this *CaseClause*.¶
<#>If Result(4) is an abrupt completion then return Result(4).¶
<#>Go to step 13.¶
<#>Let *B* be the list of *CaseClause* items in the second *CaseClauses*, in source text order.¶
<#>For the next *CaseClause* in *B*, evaluate *CaseClause*. If there is no such *CaseClause*, go to step 15.¶
<#>If *input* is not equal to Result(8), as defined by the **!**== operator, go to step 8.¶
<#>Evaluate the *StatementList* of this *CaseClause*.¶
<#>If Result(10) is an abrupt completion then return Result(10).¶
<#>Go to step 18.¶
<#>For the next *CaseClause* in *A*, evaluate the *StatementList* of this *CaseClause*. If there is no such *CaseClause*, go to step 15.¶
<#>If Result(13) is an abrupt completion then return Result(13).¶
<#>Execute the *StatementList* of *DefaultClause*.¶
<#>If Result(15) is an abrupt completion then return Result(15).¶
<#>Let *B* be the list of *CaseClause* items in the second *CaseClauses*, in source text order.¶
<#>For the next *CaseClause* in *B*, evaluate the *StatementList* of this *CaseClause*. If there is no such *CaseClause*, return (**normal**, **empty**, **empty**).¶
<#>If Result(18) is an abrupt completion then return Result(18).¶
<#>Go to step 18.¶

Evaluating *CaseClause* does not execute the associated *StatementList*. It simply evaluates the *Expression* and returns the value, which the *CaseBlock* algorithm uses to determine which *StatementList* to start executing.

12.12 Labelled Statements

Syntax

LabelledStatement :
Identifier : *Statement*

Semantics

A *Statement* may be prefixed by a label. Labelled statements are only used in conjunction with labelled **break** and **continue** statements. ECMAScript has no **goto** statement.

An ECMAScript program is considered syntactically incorrect if it contains a *LabelledStatement* that is enclosed by a *LabelledStatement* with the same *Identifier* as label. This does not apply to labels appearing within the body of a *FunctionDeclaration* that is nested, directly or indirectly, within a labelled statement.

The production *Identifier* : *Statement* is evaluated by adding *Identifier* to the label set of *Statement* and then evaluating *Statement*. If the *LabelledStatement* itself has a non-empty label set, these labels are also added to the label set of *Statement* before evaluating it. If the result of evaluating *Statement* is (**break**, *V*, *L*) where *L* is equal to *Identifier*, the production results in (**normal**, *V*, **empty**).

Prior to the evaluation of a *LabelledStatement*, the contained *Statement* is regarded as possessing an empty label set, except if it is an *IterationStatement* or a *SwitchStatement*, in which case it is regarded as possessing a label set consisting of the single element, **empty**.

Deleted: 12.11.1 Strict Mode Restrictions

A *Statement* that is an element of an *StatementList* that is part of a *CauseClause* or *DefaultClause* may not be a *VariableStatement* nor may it be a *LabelledStatement* whose *Statement* production is a *VariableStatement*. The *LabelledStatement* restriction also applies if such a *VariableStatement* is preceded by multiple labels.

12.13 The throw statement

Syntax

ThrowStatement :
throw [no *LineTerminator* here] *Expression* ;

Semantics

The production *ThrowStatement* : **throw** [no *LineTerminator* here] *Expression* ; is evaluated as:

1. Evaluate *Expression*.
2. Call `GetValue(Result(1))`.
3. Return (**throw**, `Result(2)`, **empty**).

12.14 The try statement

Syntax

TryStatement :
try *Block* *Catch*
try *Block* *Finally*
try *Block* *Catch* *Finally*

Catch :
catch (*Identifier*) *Block*

Finally :
finally *Block*

Description

The **try** statement encloses a block of code in which an exceptional condition can occur, such as a runtime error or a **throw** statement. The **catch** clause provides the exception-handling code. When a catch clause catches an exception, its *Identifier* is bound to that exception.

Semantics

The production *TryStatement* : **try** *Block* *Catch* is evaluated as follows:

1. Evaluate *Block*.
2. If Result(1).type is not **throw**, return Result(1).
3. Evaluate *Catch* with parameter Result(1).
4. Return Result(3).

The production *TryStatement* : **try** *Block* *Finally* is evaluated as follows:

1. Evaluate *Block*.
2. Evaluate *Finally*.
3. If Result(2).type is **normal**, return Result(1).
4. Return Result(2).

The production *TryStatement* : **try** *Block* *Catch* *Finally* is evaluated as follows:

1. Evaluate *Block*.
2. Let *C* = Result(1).
3. If Result(1).type is not **throw**, go to step 6.
4. Evaluate *Catch* with parameter Result(1).
5. Let *C* = Result(4).
6. Evaluate *Finally*.
7. If Result(6).type is **normal**, return *C*.
8. Return Result(6).

Deleted: If Result(4).type is not normal,

The production *Catch* : **catch** (*Identifier*) *Block* is evaluated as follows:

1. Let *C* be the parameter that has been passed to this production.
2. Let *oldEnv* be the running execution context's *LexicalEnvironment*.
3. Let *catchEnv* be the result of calling *NewDeclarativeEnvironmentRecord(E)* passing *oldEnv* as the argument.
4. Call the *CreateMutableBinding(N)* concrete method of *catchEnv* passing the *Identifier* String value as the argument.
5. Call the *SetMutableBinding(N,V,S)* concrete method of *catchEnv* passing the *Identifier*, *C*, and **false** as arguments. Note that the last argument is immaterial in this situation.
6. Set the running execution context's *LexicalEnvironment* to *catchEnv*.
7. Let *B* be the result of evaluating *Block*.
8. Set the running execution context's *LexicalEnvironment* to *oldEnv*.
9. Return *B*.

Deleted: Create a new object as if by the expression **new Object ()**.
 <#>Create a property in the object Result(2). The property's name is *Identifier*, value is *C*.value, and attributes are { DontDelete }.
 <#>Add Result(2) to the front of the scope chain.
 <#>Evaluate *Block*.
 Remove Result(2) from the front of the scope chain.

The production *Finally* : **finally** *Block* is evaluated as follows:

1. Evaluate *Block*.
2. Return Result(1).

Deleted: Result(5)

12.15 Debugger statement

Syntax

DebuggerStatement :
debugger ;

Semantics

Evaluating the *DebuggerStatement* production may allow an implementation to cause a breakpoint when run under a debugger. If a debugger is not present or active this statement has no observable effect.

13 Function Definition

Syntax

FunctionDeclaration :

function *Identifier* (*FormalParameterList*_{opt}) { *FunctionBody* }

FunctionExpression :

function Identifier_{opt} (FormalParameterList_{opt}) { FunctionBody }

FormalParameterList :

Identifier
FormalParameterList , Identifier

FunctionBody :

SourceElements

Semantics

The production *FunctionDeclaration* : **function** Identifier (FormalParameterList_{opt}) { FunctionBody } is processed for function declarations as follows during Declaration Binding instantiation (10.3.3):

1. Return the result of creating a new Function object as specified in 13.2 with parameters specified by FormalParameterList_{opt}, and body specified by FunctionBody. Pass in the VariableEnvironment of the running execution context as the Scope and the string value of Identifier as Name. Pass in true as the Strict flag if the FunctionDeclaration is contained in strict code or if its FunctionBody is strict code.

Deleted: Create

Deleted: scope chain

The production *FunctionExpression* : **function** (FormalParameterList_{opt}) { FunctionBody } is evaluated as follows:

1. Return the result of creating a new Function object as specified in 13.2 with parameters specified by FormalParameterList_{opt} and body specified by FunctionBody. Pass in the LexicalEnvironment of the running execution context as the Scope and an empty string as Name. Pass in true as the Strict flag if the FunctionExpression is contained in strict code or if its FunctionBody is strict code.

Deleted: <#>Create a property of the current variable object (as specified in 10.1.3) with name Identifier and value Result(1).¶

Deleted: Create

Deleted: scope chain

The production *FunctionExpression* : **function** Identifier (FormalParameterList_{opt}) { FunctionBody } is evaluated as follows:

1. Let funcEnv be the result of calling NewDeclarativeEnvironmentRecord(E) passing the running execution context's Lexical Environment as the argument
2. Let envRec be funcEnv's environment record.
3. Call the CreateImmutableBinding(N) concrete method of envRec passing the string value of Identifier as the argument.
4. Let closure be the result of creating a new Function object as specified in 13.2 with parameters specified by FormalParameterList_{opt} and body specified by FunctionBody. Pass in funcEnv as the Scope and the string value of Identifier as Name. Pass in true as the Strict flag if the FunctionExpression is contained in strict code or if its FunctionBody is strict code.
5. Call the InitializeImmutableBinding(N,I) concrete method of envRec passing the string value of Identifier and closure as the arguments.
6. Return closure.

Deleted: <#>Return Result(2).¶

Deleted: <#>Create a new object as if by the expression new Object().¶

<#>Add Result(1) to the front of the scope chain.¶

Create

Deleted: the scope chain of the running execution context

Deleted:

NOTE

The Identifier in a FunctionExpression can be referenced from inside the FunctionExpression's FunctionBody to allow the function to call itself recursively. However, unlike in a FunctionDeclaration, the Identifier in a FunctionExpression cannot be referenced from and does not affect the scope enclosing the FunctionExpression.

Deleted: <#>Create a property in the object Result(1). The property's name is Identifier, value is Result(3), and attributes are { DontDelete, ReadOnly }.¶

Remove Result(1) from the front of the scope chain

Deleted: Result(3)

The production *FunctionBody* : SourceElements is evaluated as follows:

1. The code of this FunctionBody is strict mode code if the first SourceElement within SourceElements is a Statement production that is an ExpressionStatement whose Expression consists solely of a StringLiteral whose value is a Use Strict Directive (14.1) or if any of the conditions in 10.1.1 apply. If the code of this FunctionBody is strict mode code SourceElements is processed and evaluated in the following steps as non-strict mode code.
2. Process SourceElements for function declarations.
3. Evaluate SourceElements.
4. Return Result(3).

Deleted: It is a SyntaxError if any single Identifier value appears more than once within a FormalParameterList of a strict mode FunctionDeclaration or FunctionExpression.¶

Deleted: 2

13.1 Strict Mode Restrictions

It is a **SyntaxError** if any *Identifier* value appears more than once within a *FormalParameterList* of a strict mode *FunctionDeclaration* or *FunctionExpression*.

It is an **EvalError** if the *Identifier* "eval" appears within a *FormalParameterList* of a strict mode *FunctionDeclaration* or *FunctionExpression*.

It is an **EvalError** if the *Identifier* "eval" appears as the *Identifier* of a strict mode *FunctionDeclaration*.

13.2 Creating Function Objects

Given an optional parameter list specified by *FormalParameterList*, a body specified by *FunctionBody*, a **Lexical Environment** specified by *Scope*, a **Boolean flag** *Strict*, and a possibly empty string *Name*, a Function object is constructed as follows:

1. Create a new native ECMAScript object and let *F* be that object.
2. Set the `[[Class]]` internal property of *F* to "Function".
3. Set the `[[Prototype]]` internal property of *F* to the **standard built-in** Function prototype object as specified in 15.3.3.1.
4. Set the `[[Call]]` internal property of *F* as described in 13.2.1.
5. Set the `[[Construct]]` internal property of *F* as described in 13.2.2.
6. Set the `[[Scope]]` internal property of *F* to the value of *Scope*.
7. Let *names* be a List containing, in left to right textual order, the strings corresponding to the identifiers of *FormalParameterList*.
8. Set the `[[FormalParameters]]` internal property of *F* to *names*.
9. Set the `[[Code]]` internal property of *F* to *FunctionBody*.
10. Set the `length` property of *F* to the number of formal parameters specified in *FormalParameterList*. If no parameters are specified, set the `length` property of *F* to 0. This property is given attributes as specified in 15.3.5.1.
11. Set the `[[Extensible]]` internal property of *F* to **true**.
12. Let *proto* be the result of creating a new object as would be constructed by the expression `new Object()` where `Object` is the standard built-in constructor with that name.
13. Set the `constructor` property of *proto* to *F*. This property has attributes `{ [[Writable]]: true, [[Enumerable]]: false, [[Configurable]]: true }`.
14. Set the `prototype` property of *F* to *proto*. This property is given attributes as specified in 15.3.5.2.
15. Set the `name` property of *F* to *Name*. This property is given attributes as specified in 15.3.5.4.
16. Set the `arguments` property of *F* using the PropertyDescriptor `{ [[Value]: null, [[Writable]]: false, [[Enumerable]]: false, [[Configurable]]: false }`.
17. Set the `caller` property of *F* using the PropertyDescriptor `{ [[Value]: null, [[Writable]]: false, [[Enumerable]]: false, [[Configurable]]: false }`.
18. Return *F*.

NOTE

A **prototype** property is automatically created for every function, to allow for the possibility that the function will be used as a constructor.

13.2.1 `[[Call]]`

When the `[[Call]]` property for a Function object *F* is called with a **this value** and a list of arguments, the following steps are taken:

1. Let *funcCtx* be the result of establishing a new execution context for function code using *F*'s *FormalParameterList*, the passed arguments list *args*, and the **this** value as described in 10.4.3.
2. Let *result* be the result of evaluating *F*'s *FunctionBody*.
3. Exit the execution context *funcCtx*, restoring the previous execution context.
4. If *result*.type is **throw** then throw *result*.value.
5. If *result*.type is **return** then return *result*.value.
6. Otherwise *result*.type must be **normal**. Return **undefined**.

Deleted: <#>Definitions¶

A couple of definitions are needed to describe the process of creating function objects: This section is no longer used.¶

13.1.1 Equated Grammar Productions¶

Two uses of the *FunctionBody* grammar production are defined to be equated when one of the following is true:¶
Both uses obtained their *FunctionBody* from the same location in the source text of the same ECMAScript program. This source text consists of global code and any contained function codes according to the definitions in 10.1.2.¶

Both uses obtained their *FunctionBody* from the same location in the source text of the same call to `eval` (15.1.2.1). This source text consists of `eval` code and any contained function codes according to the definitions in 10.1.2.¶

NOTE¶

Two uses of *FunctionBody* obtained from a call to the Function constructor (15.3.1 and 15.3.2) are never equated. Also, two uses of *FunctionBody* obtained from two different calls to `eval` are never equated, even if those two calls to `eval` were passed the same argument.¶

13.1.2 Joined Objects¶

When two or more Function objects are joined, they have the following special behaviours:¶

Any time a non-internal property of an object *O* is created or set, the corresponding property is

Deleted: single

Deleted: and

Deleted: scope chain

Deleted: <#>If there already exists an object *E* that was created by an earlier call to this section's

Deleted: original

Deleted: a new scope chain (10.1.4) that contains the same objects as

Deleted: properties

Deleted: Create

Deleted: .

Deleted: Result(9)

Deleted: is given

Deleted: DontEnum

Deleted: Result(9)

Deleted: <#>At the implementation's discretion, go to either step 2 or step 14.¶

Deleted: Step 1 allows an implementation to optimise the common case of a function *A* that has a nested

Deleted: Establish

Deleted: 2

Deleted: Evaluate

Deleted: established in step 1

Deleted: Result(2)

Deleted: Result(2)

Deleted: Result(2)

Deleted: Result(2)

Deleted: (Result(2))

Deleted:)

13.2.2 **[[Construct]]**

When the **[[Construct]]** property for a Function object *F* is called with a possibly empty list of arguments, the following steps are taken:

1. Let *obj* be a newly created native ECMAScript object.
2. Set the **[[Class]]** internal property of *obj* to "Object".
3. Set the **[[Extensible]]** internal property of *obj* to true.
4. Let *proto* be the value of the **prototype** property of *F*.
5. If *proto* is an **Object**, set the **[[Prototype]]** internal property of *obj* to *proto*.
6. If *proto* is not an **Object**, set the **[[Prototype]]** internal property of *obj* to the standard built-in Object prototype object as described in 15.2.4.
7. Let *result* be the result of calling the **[[Call]]** internal property of *F*, providing *obj* as the **this** value and providing the argument list passed into **[[Construct]]** as *args*.
8. If **Type**(*result*) is **Object** then return *result*.
9. Return *obj*.

Deleted: Create a new

Deleted: Result(1)

Deleted: Get

Deleted: the

Deleted: Result(3)

Deleted: object

Deleted: Result(1)

Deleted: Result(3)

Deleted: Result(3)

Deleted: object

Deleted: Result(1)

Deleted: original

Deleted: 3.1

Deleted: Invoke

Deleted: Result(1)

Deleted: the argument values

Deleted: Result(6)

Deleted: Result(6)

Deleted: Result(1)

DRAFT

14 Program

Syntax

Program :
SourceElements

SourceElements :
SourceElement
SourceElements SourceElement

SourceElement :
Statement
FunctionDeclaration

Semantics

The production *Program* : *SourceElements* is evaluated as follows:

1. The code of this *Program* is strict mode code if the first *SourceElement* within *SourceElements* is a *Statement* production that is an *ExpressionStatement* whose *Expression* consists solely of a *StringLiteral* whose value is the Use Strict Directive (14.1) or if any of the conditions of 10.1.1 apply. If the code of this *Program* is strict mode code, *SourceElements* is processed and evaluated in the following steps as strict mode code. Otherwise *SourceElements* is processed and evaluated in the following steps as non-strict mode code.
2. Process *SourceElements* for function declarations.
3. Return the result of evaluating *SourceElements*.

The production *SourceElements* : *SourceElement* is processed for function declarations as follows:

1. Process *SourceElement* for function declarations.

The production *SourceElements* : *SourceElement* is evaluated as follows:

1. Evaluate *SourceElement*.
2. Return Result(1).

The production *SourceElements* : *SourceElements SourceElement* is processed for function declarations as follows:

1. Process *SourceElements* for function declarations.
2. Process *SourceElement* for function declarations.

The production *SourceElements* : *SourceElements SourceElement* is evaluated as follows:

1. Evaluate *SourceElements*.
2. If Result(1) is an abrupt completion, return Result(1)
3. Evaluate *SourceElement*.
4. Return Result(3).

The production *SourceElement* : *Statement* is processed for function declarations by taking no action.

The production *SourceElement* : *Statement* is evaluated as follows:

1. Evaluate *Statement*.
2. Return Result(1).

The production *SourceElement* : *FunctionDeclaration* is processed for function declarations as follows:

1. Process *FunctionDeclaration* for function declarations (see clause 13).

The production *SourceElement* : *FunctionDeclaration* is evaluated as follows:

1. Return (**normal**, **empty**, **empty**).

Deleted: Evaluate

Deleted: <#>Return Result(2),¶

14.1 Use Strict Directive

A strict mode *Program* or *FunctionBody* may be explicitly designated by the occurrence of a Use Strict Directive as the first *SourceElement* of the *Program*. A Use Strict Directive is coded as a *ExpressionStatement* that consists entirely of a *StringLiteral* whose value conforms to the *UseStrictDirective* grammar specified below.

To be considered as a Use Strict Directive the value of a *StringLiteral* must not include an *Line Terminator* characters (7.3). To determine whether or not such a *StringLiteral* is a Use Strict Directive, the string value of the literal is converted to a sequence of lexical input elements (7) as if it was the source text of an ECMAScript program. If the sequence of input elements can be parsed as a single instance of the goal nonterminal *UserStrictDirective* using the following grammar, the *StringLiteral* is a Use Strict Directive.

Syntax

UseStrictDirective :

~~use strict~~, *useExtension*_{opt}

useExtension :

~~,~~ *ArbitraryInputElements*_{opt}

ArbitraryInputElements :

[any sequence of input elements]

Deleted: conform to the

Deleted: ¶

Deleted: [no *LineTerminator* here]

Deleted:

Deleted: [no *LineTerminator* here]

Deleted:

Deleted: [no *LineTerminator* here]

Deleted: lexical

Deleted: that does not include any *LineTerminator* elements

DRAFT

15 Native ECMAScript Objects

There are certain built-in objects available whenever an ECMAScript program begins execution. One, the global object, is part of the lexical environment of the executing program. Others are accessible as initial properties of the global object.

Deleted: in the scope chain

Unless specified otherwise, the `[[Class]]` property of a built-in object is `"Function"` if that built-in object has a `[[Call]]` property, or `"Object"` if that built-in object does not have a `[[Call]]` property. Unless specified otherwise, the `[[Extensible]]` property of a built-in object has the value `true`.

Many built-in objects are functions: they can be invoked with arguments. Some of them furthermore are constructors: they are functions intended for use with the `new` operator. For each built-in function, this specification describes the arguments required by that function and properties of the Function object. For each built-in constructor, this specification furthermore describes properties of the prototype object of that constructor and properties of specific object instances returned by a `new` expression that invokes that constructor.

Unless otherwise specified in the description of a particular function, if a function or constructor described in this section is given fewer arguments than the function is specified to require, the function or constructor shall behave exactly as if it had been given sufficient additional arguments, each such argument being the `undefined` value.

Unless otherwise specified in the description of a particular function, if a function or constructor described in this section is given more arguments than the function is specified to allow, the behaviour of the function or constructor is undefined.

NOTE

Implementations that add additional capabilities to the set of built-in functions are encouraged to do so by adding new functions rather than adding new parameters to existing functions.

Deleted: In particular, an implementation is permitted (but not required) to throw a `TypeError` exception in this case.

Every built-in function and every built-in constructor has the Function prototype object, which is the initial value of the expression `Function.prototype` (15.3.4), as the value of its internal `[[Prototype]]` property.

Deleted: 15.3.2.1

Every built-in prototype object has the Object prototype object, which is the initial value of the expression `Object.prototype` (15.2.4), as the value of its internal `[[Prototype]]` property, except the Object prototype object itself.

Deleted: 15.3.2.1

None of the built-in functions described in this section shall implement the internal `[[Construct]]` method unless otherwise specified in the description of a particular function. None of the built-in functions described in this section shall initially have a `prototype` property unless otherwise specified in the description of a particular function. Every built-in Function object described in this section—whether as a constructor, an ordinary function, or both—has a `length` property whose value is an integer. Unless otherwise specified, this value is equal to the largest number of named arguments shown in the section headings for the function description, including optional parameters.

NOTE

For example, the Function object that is the initial value of the `slice` property of the String prototype object is described under the section heading `"String.prototype.slice (start, end)"` which shows the two named arguments `start` and `end`; therefore the value of the `length` property of that Function object is 2.

In every case, the `length` property of a built-in Function object described in this section has the attributes `{ [[Writable]]: false, [[Enumerable]]: false, [[Configurable]]: false, }` (and no others). Every other property described in this section has the attribute `{ [[Writable]]: true, [[Enumerable]]: false, [[Configurable]]: true, }` unless otherwise specified.

Deleted: `ReadOnly, DontDelete, DontEnum`

Deleted: `DontEnum`

Deleted: (and no others)

15.1 The Global Object

The unique global object is created before control enters any execution context.

Unless otherwise specified, the properties of the global object have attributes `{ [[Enumerable]]: false }`.

The global object does not have a `[[Construct]]` property; it is not possible to use the global object as a constructor with the `new` operator.

The global object does not have a `[[Call]]` property; it is not possible to invoke the global object as a function.

The values of the `[[Prototype]]` and `[[Class]]` properties of the global object are implementation-dependent.

In addition to the properties defined in this specification the global object may have additional host defined properties. This may include a property whose value is the global object itself; for example, in the HTML document object model the `window` property of the global object is the global object itself.

15.1.1 Value Properties of the Global Object

15.1.1.1 NaN

The initial value of `NaN` is `NaN` (8.5). This property has the attributes { `[[Writable]]: false`, `[[Enumerable]]: false`, `[[Configurable]]: false` }.

Deleted: DontEnum, DontDelete

15.1.1.2 Infinity

The initial value of `Infinity` is `+∞` (8.5). This property has the attributes { `[[Writable]]: false`, `[[Enumerable]]: false`, `[[Configurable]]: false` }.

Deleted: DontEnum, DontDelete

15.1.1.3 undefined

The initial value of `undefined` is `undefined` (8.1). This property has the attributes { `[[Writable]]: false`, `[[Enumerable]]: false`, `[[Configurable]]: false` }.

Deleted: DontEnum, DontDelete

15.1.2 Function Properties of the Global Object

15.1.2.1 eval(x)

When the `eval` function is called with one argument `x`, the following steps are taken:

1. If `x` is not a string value, return `x`.
2. Let `prog` be the ECMAScript code that is the result of parsing `x` as a *Program*. If the parse fails, throw a `SyntaxError` exception (but see also clause 16).
3. Let `evalCtx` be the result of establishing a new execution context (10.4.2) for the eval code `prog`.
4. Let `result` be the result of evaluating the program `prog`.
5. Exit the running execution context `evalCtx`, restoring the previous execution context.
6. If `result`.type is `normal` and its completion value is a value `V`, then return the value `V`.
7. If `result`.type is `normal` and its completion value is `empty`, then return the value `undefined`.
8. Otherwise, `result`.type must be `throw`. Throw `result`.value as an exception.

Deleted: Parse

Deleted: Evaluate

Deleted: from step 2

Deleted: Result(3)

Deleted: Result(3)

Deleted: Result(3)

Deleted: Result(3)

15.1.2.1.1 Direct Call to Eval

A direct call to the `eval` function is one that is expressed as a *CallExpression* that meets the following two conditions:

- The Reference that is the result of evaluating the *MemberExpression* in the *CallExpression* has an environment record as its base value and its reference name is `"eval"`.
- The result of calling the abstract operation `GetValue` with that Reference as the argument is the standard build-in function defined in 15.1.2.1.

15.1.2.2 parseInt(string, radix)

The `parseInt` function produces an integer value dictated by interpretation of the contents of the `string` argument according to the specified `radix`. Leading white space in the string is ignored. If `radix` is `undefined` or 0, it is assumed to be 10 except when the number begins with the character pairs `0x` or `0X`, in which case a radix of 16 is assumed. Any radix-16 number may also optionally begin with the character pairs `0x` or `0X`.

When the `parseInt` function is called, the following steps are taken:

1. Let `inputString` be `ToString(string)`.
2. Let `S` be a newly created substring of `inputString`, consisting of the first character that is not a `StrWhiteSpaceChar` and all characters following that character. (In other words, remove leading white space.)
3. Let `sign` be 1.
4. If `S` is not empty and the first character of `S` is a minus sign `-`, let `sign` be `-1`.
5. If `S` is not empty and the first character of `S` is a plus sign `+` or a minus sign `-`, then remove the first character from `S`.
6. Let `R = ToInt32(radix)`.

Deleted: If the value of the `eval` property is used in any way other than a direct call (that is, other than by the explicit use of its name as an *Identifier* which is the *MemberExpression* in a *CallExpression*), or if the `eval` property is assigned to, an `EvalError` exception may be thrown.¶

15.1.2.1.1 Strict Mode Restrictions¶
If strict mode code uses the value of the `eval` property any way other than as a direct call (that is, other than by the explicit use of its name as an *Identifier* which is the *MemberExpression* in a *CallExpression*), or if the `eval` property is assigned to, an `EvalError` exception is thrown.¶

Deleted: Call ToString(string)

Deleted: Result(1)

7. Let stripPrefix be true.

8. If $R \neq 0$, then

- a. If $R < 2$ or $R > 36$, then return NaN.
- b. If $R \neq 16$, let stripPrefix be false.

9. Else, $R = 0$

- a. Let $R = 10$.
- b. If the length of S is at least 1 and the first character of S is "0", then at the implementation's discretion either let $R = 8$ or leave R unchanged.

10. If stripPrefix is true, then

- a. If the length of S is at least 2 and the first two characters of S are either "0x" or "0X", then remove the first two characters from S and let $R = 16$.

11. If S contains any character that is not a radix- R digit, then let Z be the substring of S consisting of all characters before the first such character; otherwise, let Z be S .

12. If Z is empty, return NaN.

13. Let mathInt be the mathematical integer value that is represented by Z in radix- R notation, using the letters **A-Z** and **a-z** for digits with values 10 through 35. (However, if R is 10 and Z contains more than 20 significant digits, every significant digit after the 20th may be replaced by a 0 digit, at the option of the implementation; and if R is not 2, 4, 8, 10, 16, or 32, then mathInt may be an implementation-dependent approximation to the mathematical integer value that is represented by Z in radix- R notation.)

14. Let number be the number value for mathInt.

15. Return sign \times number.

NOTE

parseInt may interpret only a leading portion of the string as an integer value; it ignores any characters that cannot be interpreted as part of the notation of an integer, and no indication is given that any such characters were ignored.

When radix is 0 or undefined and the string's number begins with a 0 digit not followed by an x or X, then the implementation may, at its discretion, interpret the number either as being octal or as being decimal. Implementations are encouraged to interpret numbers in this case as being decimal.

15.1.2.3 parseFloat (string)

The parseFloat function produces a number value dictated by interpretation of the contents of the string argument as a decimal literal.

When the parseFloat function is called, the following steps are taken:

1. Let inputString be ToString(string).
2. Let trimmedString be a substring of inputString, consisting of the leftmost character that is not a StrWhiteSpaceChar and all characters to the right of that character. (In other words, remove leading white space.)
3. If neither trimmedString, nor any prefix of trimmedString satisfies the syntax of a StrDecimalLiteral (see 9.3.1), return NaN.
4. Let numberString be the longest prefix of trimmedString, which might be trimmedString, itself, which satisfies the syntax of a StrDecimalLiteral.
5. Return the number value for the MV of numberString.

NOTE

parseFloat may interpret only a leading portion of the string as a number value; it ignores any characters that cannot be interpreted as part of the notation of a decimal literal, and no indication is given that any such characters were ignored.

15.1.2.4 isNaN (number)

Returns true if the result is NaN, and otherwise returns false.

1. If ToNumber(number) is NaN, return true.
2. Otherwise, return false.

15.1.2.5 isFinite (number)

Returns false if the result is NaN, +∞, or -∞, and otherwise returns true.

Deleted: =

Deleted: go to step 11.

Deleted: =

Deleted: go to step 13

Deleted: Go to step 14.

Deleted: Compute

Deleted: Result(16)

Deleted: Compute

Deleted: Result(16)

Deleted: Result(17)

Deleted: Call

Deleted: Compute

Deleted: Result(1)

Deleted: Result(2)

Deleted: Result(2)

Deleted: 0

Deleted: Compute

Deleted: Result(2)

Deleted: Result(2)

Deleted: Result(4)

Deleted: Applies ToNumber to its argument, then returns

Deleted: <#>Call GetValue(number).¶
<#>Call ToNumber(Result(1)).¶

Deleted: Result(2)

Deleted: R

Deleted: Applies ToNumber to its argument, then returns

1. If `ToNumber(number)` is NaN, +∞, or -∞, return false.
2. Otherwise, return true.

15.1.3 URI Handling Function Properties

Uniform Resource Identifiers, or URIs, are strings that identify resources (e.g. web pages or files) and transport protocols by which to access them (e.g. HTTP or FTP) on the Internet. The ECMAScript language itself does not provide any support for using URIs except for functions that encode and decode URIs as described in 15.1.3.1, 15.1.3.2, 15.1.3.3 and 15.1.3.4.

NOTE

Many implementations of ECMAScript provide additional functions and methods that manipulate web pages; these functions are beyond the scope of this standard.

A URI is composed of a sequence of components separated by component separators. The general form is:

Scheme : *First* / *Second* ; *Third* ? *Fourth*

where the italicised names represent components and the “:”, “/”, “;” and “?” are reserved characters used as separators. The `encodeURIComponent` and `decodeURIComponent` functions are intended to work with complete URIs; they assume that any reserved characters in the URI are intended to have special meaning and so are not encoded. The `encodeURIComponent` and `decodeURIComponent` functions are intended to work with the individual component parts of a URI; they assume that any reserved characters represent text and so must be encoded so that they are not interpreted as reserved characters when the component is part of a complete URI.

The following lexical grammar specifies the form of encoded URIs.

```

uri :::
  uriCharactersopt

uriCharacters :::
  uriCharacter uriCharactersopt

uriCharacter :::
  uriReserved
  uriUnescaped
  uriEscaped

uriReserved ::: one of
  ; / ? : @ & = + $ %

uriUnescaped :::
  uriAlpha
  DecimalDigit
  uriMark

uriEscaped :::
  % HexDigit HexDigit

uriAlpha ::: one of
  a b c d e f g h i j k l m n o p q r s t u v w x y z
  A B C D E F G H I J K L M N O P Q R S T U V W X Y Z

uriMark ::: one of
  - _ . ! ~ * ' ( )

```

When a character to be included in a URI is not listed above or is not intended to have the special meaning sometimes given to the reserved characters, that character must be encoded. The character is first transformed into a sequence of octets using the UTF-8 transformation, with surrogate pairs first transformed from their [UTF-16](#) to [UTF-32](#) encodings. (Note that for [code units](#) in the range [0,127] this

Deleted: <#>Call GetValue(number).¶
<#>Call ToNumber(Result(1)).¶

Deleted: Result(2)

Deleted: R

Deleted: UCS-2

Deleted: UCS-4

Deleted: code point

results in a single octet with the same value.) The resulting sequence of octets is then transformed into a string with each octet represented by an escape sequence of the form “%xx”.

The encoding and escaping process is described by the hidden function Encode taking two string arguments *string* and *unescapeSet*. This function is defined for expository purpose only.

1. Compute the number of characters in *string*.
2. Let *R* be the empty string.
3. Let *k* be 0.
4. If *k* equals Result(1), return *R*.
5. Let *C* be the character at position *k* within *string*.
6. If *C* is not in *unescapeSet*, go to step 9.
7. Let *S* be a string containing only the character *C*.
8. Go to step 24.
9. If the **code unit** value of *C* is not less than 0xDC00 and not greater than 0xDFFF, throw a **URIError** exception.
10. If the **code unit** value of *C* is less than 0xD800 or greater than 0xDBFF, let *V* be the **code unit** value of *C* and go to step 16.
11. Increase *k* by 1.
12. If *k* equals Result(1), throw a **URIError** exception.
13. Get the **code unit** value of the character at position *k* within *string*.
14. If Result(13) is less than 0xDC00 or greater than 0xDFFF, throw a **URIError** exception.
15. Let *V* be (((the **code unit** value of *C*) - 0xD800) * 0x400 + (Result(13) - 0xDC00) + 0x10000).
16. Let *Octets* be the array of octets resulting by applying the UTF-8 transformation to *V*, and let *L* be the array size.
17. Let *j* be 0.
18. Get the value at position *j* within *Octets*.
19. Let *S* be a string containing three characters “%XY” where XY are two uppercase hexadecimal digits encoding the value of Result(18).
20. Let *R* be a new string value computed by concatenating the previous value of *R* and *S*.
21. Increase *j* by 1.
22. If *j* is equal to *L*, go to step 25.
23. Go to step 18.
24. Let *R* be a new string value computed by concatenating the previous value of *R* and *S*.
25. Increase *k* by 1.
26. Go to step 4.

The unescaping and decoding process is described by the hidden function Decode taking two string arguments *string* and *reservedSet*. This function is defined for expository purpose only.

1. Compute the number of characters in *string*.
2. Let *R* be the empty string.
3. Let *k* be 0.
4. If *k* equals Result(1), return *R*.
5. Let *C* be the character at position *k* within *string*.
6. If *C* is not “%”, go to step 40.
7. Let *start* be *k*.
8. If *k* + 2 is greater than or equal to Result(1), throw a **URIError** exception.
9. If the characters at position (*k*+1) and (*k* + 2) within *string* do not represent hexadecimal digits, throw a **URIError** exception.
10. Let *B* be the 8-bit value represented by the two hexadecimal digits at position (*k* + 1) and (*k* + 2).
11. Increment *k* by 2.
12. If the most significant bit in *B* is 0, let *C* be the character with **code unit** value *B* and go to step 37.
13. Let *n* be the smallest non-negative number such that (*B* << *n*) & 0x80 is equal to 0.
14. If *n* equals 1 or *n* is greater than 4, throw a **URIError** exception.
15. Let *Octets* be an array of 8-bit integers of size *n*.
16. Put *B* into *Octets* at position 0.
17. If *k* + (3 * (*n* - 1)) is greater than or equal to Result(1), throw a **URIError** exception.
18. Let *j* be 1.
19. If *j* equals *n*, go to step 29.

Deleted: code point

Deleted: code point

Deleted: code point

Deleted: code point

Deleted: code point

Deleted: code point

20. Increment k by 1.
21. If the character at position k is not '%', throw a **URIError** exception.
22. If the characters at position $(k + 1)$ and $(k + 2)$ within *string* do not represent hexadecimal digits, throw a **URIError** exception.
23. Let B be the 8-bit value represented by the two hexadecimal digits at position $(k + 1)$ and $(k + 2)$.
24. If the two most significant bits in B are not 10, throw a **URIError** exception.
25. Increment k by 2.
26. Put B into *Octets* at position j .
27. Increment j by 1.
28. Go to step 19.
29. Let V be the value obtained by applying the UTF-8 transformation to *Octets*, that is, from an array of octets into a 32-bit value.
30. If V is less than 0x10000, go to step 36.
31. If V is greater than 0x10FFFF, throw a **URIError** exception.
32. Let L be $((V - 0x10000) \& 0x3FF) + 0xDC00$.
33. Let H be $((V - 0x10000) \gg 10) \& 0x3FF + 0xD800$.
34. Let S be the string containing the two characters with **code unit** values H and L .
35. Go to step 41.
36. Let C be the character with **code unit** value V .
37. If C is not in *reservedSet*, go to step 40.
38. Let S be the substring of *string* from position *start* to position k included.
39. Go to step 41.
40. Let S be the string containing only the character C .
41. Let R be a new string value computed by concatenating the previous value of R and S .
42. Increase k by 1.
43. Go to step 4.

NOTE 1

The syntax of Uniform Resource Identifiers is given in RFC2396.

NOTE 2

A formal description and implementation of UTF-8 is given in the Unicode Standard, Version 2.0, Appendix A.

In UTF-8, characters are encoded using sequences of 1 to 6 octets. The only octet of a "sequence" of one has the higher-order bit set to 0, the remaining 7 bits being used to encode the character value. In a sequence of n octets, $n > 1$, the initial octet has the n higher-order bits set to 1, followed by a bit set to 0. The remaining bits of that octet contain bits from the value of the character to be encoded. The following octets all have the higher-order bit set to 1 and the following bit set to 0, leaving 6 bits in each to contain bits from the character to be encoded. The possible UTF-8 encodings of ECMAScript characters are:

Code Unit Value	Representation	1st Octet	2nd Octet	3rd Octet	4th Octet
0x0000 - 0x007F	00000000 0zzzzzzz	0zzzzzzz			
0x0080 - 0x07FF	00000yyy yyzzzzzz	110yyyyy	10zzzzzz		
0x0800 - 0xD7FF	xxxxyyyy yyzzzzzz	1110xxxx	10yyyyyy	10zzzzzz	
0xD800 - 0xDBFF followed by	110110vv vvvvvvxxx followed by	11110uuu	10uuwww	10xyyyyy	10zzzzzz
0xDC00 - 0xDFFF	110111yy yyzzzzzz				
0xD800 - 0xDBFF not followed by	causes URIError				
0xDC00 - 0xDFFF	causes URIError				
0xE000 - 0xFFFF	xxxxyyyy yyzzzzzz	1110xxxx	10yyyyyy	10zzzzzz	

Deleted: code point

Deleted: code point

Deleted: Code Point

Where

$uuuuu = vvvv + 1$

to account for the addition of 0x10000 as in 3.7, Surrogates of the Unicode Standard version 2.0.

The range of ~~code unit~~ values 0xD800-0xDFFF is used to encode surrogate pairs; the above transformation combines a ~~UTF-16 surrogate pair~~ into a ~~UTF-32 representation~~ and encodes the resulting 21-bit value in UTF-8. Decoding reconstructs the surrogate pair.

Deleted: code point

Deleted: UCS-2

Deleted: UCS-4

15.1.3.1 decodeURI (encodedURI)

The **decodeURI** function computes a new version of a URI in which each escape sequence and UTF-8 encoding of the sort that might be introduced by the **encodeURI** function is replaced with the character that it represents. Escape sequences that could not have been introduced by **encodeURI** are not replaced.

When the **decodeURI** function is called with one argument *encodedURI*, the following steps are taken:

1. Call ToString(*encodedURI*).
2. Let *reservedURISet* be a string containing one instance of each character valid in *uriReserved* plus “#”.
3. Call Decode(Result(1), *reservedURISet*)
4. Return Result(3).

NOTE

The character “#” is not decoded from escape sequences even though it is not a reserved URI character.

15.1.3.2 decodeURIComponent (encodedURIComponent)

The **decodeURIComponent** function computes a new version of a URI in which each escape sequence and UTF-8 encoding of the sort that might be introduced by the **encodeURIComponent** function is replaced with the character that it represents.

When the **decodeURIComponent** function is called with one argument *encodedURIComponent*, the following steps are taken:

1. Call ToString(*encodedURIComponent*).
2. Let *reservedURIComponentSet* be the empty string.
3. Call Decode(Result(1), *reservedURIComponentSet*)
4. Return Result(3).

15.1.3.3 encodeURI (uri)

The **encodeURI** function computes a new version of a URI in which each instance of certain characters is replaced by one, two or three escape sequences representing the UTF-8 encoding of the character.

When the **encodeURI** function is called with one argument *uri*, the following steps are taken:

1. Call ToString(*uri*).
2. Let *unescapedURISet* be a string containing one instance of each character valid in *uriReserved* and *uriUnescaped* plus “#”.
3. Call Encode(Result(1), *unescapedURISet*)
4. Return Result(3).

NOTE

The character “#” is not encoded to an escape sequence even though it is not a reserved or unescaped URI character.

15.1.3.4 encodeURIComponent (uriComponent)

The **encodeURIComponent** function computes a new version of a URI in which each instance of certain characters is replaced by one, two or three escape sequences representing the UTF-8 encoding of the character.

When the **encodeURIComponent** function is called with one argument *uriComponent*, the following steps are taken:

1. Call ToString(*uriComponent*).
2. Let *unescapedURIComponentSet* be a string containing one instance of each character valid in *uriUnescaped*.
3. Call Encode(Result(1), *unescapedURIComponentSet*)
4. Return Result(3).

15.1.4 Constructor Properties of the Global Object

15.1.4.1 Object (. . .)

See 15.2.1 and 15.2.2.

15.1.4.2 Function (. . .)

See 15.3.1 and 15.3.2.

15.1.4.3 Array (. . .)

See 15.4.1 and 15.4.2.

15.1.4.4 String (. . .)

See 15.5.1 and 15.5.2.

15.1.4.5 Boolean (. . .)

See 15.6.1 and 15.6.2.

15.1.4.6 Number (. . .)

See 15.7.1 and 15.7.2.

15.1.4.7 Date (. . .)

See 15.9.2.

15.1.4.8 RegExp (. . .)

See 15.10.3 and 15.10.4.

15.1.4.9 Error (. . .)

See 15.11.1 and 15.11.2.

15.1.4.10 EvalError (. . .)

See 15.11.6.1.

15.1.4.11 RangeError (. . .)

See 15.11.6.2.

15.1.4.12 ReferenceError (. . .)

See 15.11.6.3.

15.1.4.13 SyntaxError (. . .)

See 15.11.6.4.

15.1.4.14 TypeError (. . .)

See 15.11.6.5.

15.1.4.15 URIError (. . .)

See 15.11.6.6.

15.1.5 Other Properties of the Global Object

15.1.5.1 Math

See 15.8.

15.1.5.2 JSON

See 15.12.

15.2 Object Objects

15.2.1 The Object Constructor Called as a Function

When **Object** is called as a function rather than as a constructor, it performs a type conversion.

15.2.1.1 Object ([value])

When the **Object** function is called with no arguments or with one argument *value*, the following steps are taken:

1. If *value* is **null**, **undefined** or not supplied, create and return a new Object object exactly if the object constructor had been called with the same arguments (15.2.2.1).
2. Return **ToObject(value)**.

15.2.2 The Object Constructor

When **Object** is called as part of a **new** expression, it is a constructor that may create an object.

15.2.2.1 new Object ([value])

When the **Object** constructor is called with no arguments or with one argument *value*, the following steps are taken:

1. If *value* is not supplied, go to step 8.
2. If the type of *value* is not Object, go to step 5.
3. If the *value* is a native ECMAScript object, do not create a new object but simply return *value*.
4. If the *value* is a host object, then actions are taken and a result is returned in an implementation-dependent manner that may depend on the host object.
5. If the type of *value* is String, return **ToObject(value)**.
6. If the type of *value* is Boolean, return **ToObject(value)**.
7. If the type of *value* is Number, return **ToObject(value)**.
8. (The argument *value* was not supplied or its type was Null or Undefined.)

Create a new native ECMAScript object.

The **[[Prototype]]** property of the newly constructed object is set to the [standard built-in](#) Object prototype object.

The **[[Class]]** property of the newly constructed object is set to **"Object"**.

[The **\[\[Extensible\]\]** property of the newly constructed object is set to true.](#)

The newly constructed object has no **[[PrimitiveValue]]** property.

[The newly constructed object has all the internal methods as specified in 11.2](#)

9. Return the newly created native object.

Deleted:

15.2.3 Properties of the Object Constructor

The value of the internal **[[Prototype]]** property of the Object constructor is the Function prototype object.

Besides the internal properties and the **length** property (whose value is 1), the Object constructor has the following properties:

15.2.3.1 Object.prototype

The initial value of **Object.prototype** is the Object prototype object (15.2.4).

This property has the attributes { **[[Writable]]**: false, **[[Enumerable]]**: false, **[[Configurable]]**: false, }.

Deleted: DontEnum, DontDelete, ReadOnly

15.2.3.2 Object.getPrototypeOf (O)

[When the **getPrototypeOf** function is called with argument *O*, the following steps are taken:](#)

1. [If **Type\(O\)** is not Object throw a **TypeError** exception.](#)

2. Return the value of the `[[Prototype]]` internal property of *O*.

15.2.3.3 **Object.getOwnPropertyDescriptor (O, P)**

When the `getOwnPropertyDescriptor` function is called, the following steps are taken:

1. If `Type(O)` is not `Object` throw a **TypeError** exception.
2. Let *name* be `ToString(P)`.
3. Let *desc* be the result of calling the `[[GetOwnProperty]]` internal method of *O* with argument *name*.
4. Return the result of calling `FromPropertyDescriptor(desc)`.

Deleted: If *P* is **undefined** or **null**, let *name* be the empty string, otherwise let

15.2.3.4 **Object.getOwnPropertyNames (O)**

When the `getOwnPropertyNames` function is called, the following steps are taken:

1. If `Type(O)` is not `Object` throw a **TypeError** exception.
2. Let *array* be the result of creating a new object as if by the expression `new Array ()` where **Array** is the standard built-in constructor with that name.
3. For each named own property *P* of *O*
 - a. Let *name* be the string value that is the name of *P*.
 - b. Append a property to *array* as if by calling the standard built-in method `Array.prototype.push` with *array* as the **this** value, and with argument *name*.
4. Return *array*.

NOTE

If *O* is a `String` instance, the set of own properties processed in step 3a does not include the implicit properties defined in 15.5.5.2 that correspond to character positions within the object's `[[PrimitiveValue]]` string.

Deleted: of

15.2.3.5 **Object.create (O [, Properties])**

The `create` function creates a new object with a specified prototype. When the `create` function is called, the following steps are taken:

1. If `Type(O)` is not `Object` throw a **TypeError** exception.
2. Let *obj* be the result of creating a new object as if by the expression `new Object()` where `Object` is the standard built-in constructor with that name.
3. Set the `[[Prototype]]` internal property of *obj* to *O*.
4. Add own properties to *obj* as if by calling the standard built-in function `Object.defineProperties` with arguments *obj* and *Properties*.
5. Return *obj*.

15.2.3.6 **Object.defineProperty (O, P, Attributes)**

The `defineProperty` function is used to add own properties and/or update the attributes of existing own property of an object. When the `defineProperty` function is called, the following steps are taken:

1. If `Type(O)` is not `Object` throw a **TypeError** exception.
2. Let *name* be `ToString(P)`.
3. Let *desc* be the result of calling `ToPropertyDescriptor` with *Attributes* as the argument.
4. Call the `[[DefineOwnProperty]]` internal method of *O* with arguments *name*, *desc*, and **true**.
5. Return *O*.

15.2.3.7 **Object.defineProperties (O, Properties)**

The `defineProperties` function is used to add own properties and/or update the attributes of existing own properties of an object. When the `defineProperties` function is called, the following steps are taken atomically:

1. If `Type(O)` is not `Object` throw a **TypeError** exception.
2. Let *props* be `ToObject(Properties)`.
3. For each named own property name *P* of *props*
 - a. Let *descObj* be the result of calling the `[[GetOwnProperty]]` internal method of *props* with *P* as the argument.
 - b. Let *desc* be the result of calling `ToPropertyDescriptor` with *descObj* as the argument.
4. Call the `[[DefineOwnProperty]]` internal method of *O* with arguments *P*, *desc*, and **true**.

5. Return *O*.

The above algorithm is specified as a set of sequential steps that include the possibility of an exception being thrown as various intermediate points. Rather than failing after a partial update of *O*, this function must be implemented such that it either atomically completes all property updates successfully or fails without making any update to the properties of object *O*.

15.2.3.8 Object.seal (*O*)

When the **seal** function is called, the following steps are taken:

1. If `Type(O)` is not `Object` throw a **`TypeError`** exception.
2. For each named own property name *P* of *O*,
 - a. Let *desc* be the result of calling the `[[GetOwnProperty]]` internal method of *O* with *P*.
 - b. If *desc*.[`Configurable`] is **true**, set *desc*.[`Configurable`] to **false**.
 - c. Call the `[[DefineOwnProperty]]` internal method of *O* with *P*, *desc*, and **true** as arguments.
3. Set the internal `[[Extensible]]` internal property of *O* to **false**.
4. Return *O*.

The above algorithm is specified as a set of sequential steps that include the possibility of an exception being thrown as various intermediate points. Rather than failing after a partial update of *O*, this function must be implemented such that it either atomically completes all property updates successfully or fails without making any update to the properties of object *O*.

15.2.3.9 Object.freeze (*O*)

When the **freeze** function is called, the following steps are taken:

1. If `Type(O)` is not `Object` throw a **`TypeError`** exception.
2. For each named own property name *P* of *O*,
 - a. Let *desc* be the result of calling the `[[GetOwnProperty]]` internal method of *O* with *P*.
 - b. If `IsDataDescriptor(desc)` then
 - i. If *desc*.[`Writable`] is **true**, set *desc*.[`Writable`] to **false**.
 - c. If *desc*.[`Configurable`] is **true**, set *desc*.[`Configurable`] to **false**.
 - d. Call the `[[DefineOwnProperty]]` internal method of *O* with *P*, *desc*, and **true** as arguments.
3. Set the `[[Extensible]]` internal property of *O* to **false**.
4. Return *O*.

The above algorithm is specified as a set of sequential steps that include the possibility of an exception being thrown as various intermediate points. Rather than failing after a partial update of *O*, this function must be implemented such that it either atomically completes all updates successfully or fails without making any update to object *O*.

15.2.3.10 Object.preventExtensions (*O*)

When the **preventExtensions** function is called, the following steps are taken:

1. If `Type(O)` is not `Object` throw a **`TypeError`** exception.
2. Set the `[[Extensible]]` internal property of *O* to **false**.
3. Return *O*.

15.2.3.11 Object.isSealed (*O*)

When the **isSealed** function is called with argument *O*, the following steps are taken:

1. If `Type(O)` is not `Object` throw a **`TypeError`** exception.
2. For each named own data property *P* of *O*,
 - a. Let *desc* be the result of calling the `[[GetOwnProperty]]` internal method of *O* with *P*.
 - b. If the *desc*.[`Configurable`] is **true**, then return **false**.
3. If the `[[Extensible]]` internal property of *O* is **false**, then return **true**.
4. Otherwise, return **false**.

15.2.3.12 Object.isFrozen (*O*)

When the **isFrozen** function is called with argument *O*, the following steps are taken:

1. If `Type(O)` is not `Object` throw a **`TypeError`** exception.

Deleted:

2. For each named own data property name *P* of *O*,
 - a. Let *desc* be the result of calling the `[[GetOwnProperty]]` internal method of *O* with *P*.
 - b. If `IsDataDescriptor(desc)` then
 - i. If `desc.[[Writable]]` is `true`, return `false`.
 - c. If `desc.[[Configurable]]` is `true`, then return `false`.
3. If the `[[Extensible]]` internal property of *O* is `true`, then return `false`.
4. Otherwise, return `true`.

15.2.3.13 Object.isExtensible (O)

When the `isExtensible` function is called with argument *O*, the following steps are taken:

1. If `Type(O)` is not `Object` throw a `TypeError` exception.
2. Return the Boolean value of the `[[Extensible]]` internal property of *O*.

15.2.3.14 Object.keys (O)

When the `keys` function is called with argument *O*, the following steps are taken:

1. If the `Type(O)` is not `Object`, throw a `TypeError` exception.
2. Let *n* be the number of own enumerable property of *O*.
3. Let *array* be the result of creating a new `Object` as if by the expression `new Array(n)` where `Array` is the standard built-in constructor with that name.
4. Let *index* be 0.
5. For each own enumerable property of *O* whose name string is *P*, property
 - a. Call the `[[Put]]` internal method of *array* with arguments `ToString(index)` and *P*.
 - b. Increment *index* by 1.
6. Return *array*.

If an implementation defines a specific order of enumeration for the for-in statement, that same enumeration order must be used in step 5 of this algorithm.

15.2.4 Properties of the Object Prototype Object

The value of the internal `[[Prototype]]` property of the Object prototype object is `null`, the value of the internal `[[Class]]` property is `"Object"`, and the value of the internal `[[Extensible]]` property is `true`.

15.2.4.1 Object.prototype.constructor

The initial value of `Object.prototype.constructor` is the built-in `Object` constructor.

15.2.4.2 Object.prototype.toString ()

When the `toString` method is called, the following steps are taken:

1. Let *O* be the result of calling `ToObject` passing the `this` object as the argument.
2. Let *class* be the value of the `[[Class]]` internal property of *O*.
3. Return the string value that is the result of concatenating the three strings `"[object "`, *class*, and `"]"`.

15.2.4.3 Object.prototype.toLocaleString ()

When the `toLocaleString` method is called, the following steps are taken:

1. Let *O* be the result of calling `ToObject` passing the `this` object as the argument.
2. Let *toString* be the result of calling the `[[Get]]` internal method of *O* passing `"toString"` as the argument.
3. If `IsCallable(toString)` is `false`, throw a `TypeError` exception.
4. Return the result of calling the `[[Call]]` internal method of *toString* passing *O* as the `this` value and no arguments.

NOTE 1

This function is provided to give all Objects a generic `toLocaleString` interface, even though not all may use it. Currently, `Array`, `Number`, and `Date` provide their own locale-sensitive `toLocaleString` methods.

NOTE 2

Deleted: , append the key string of the
Deleted: to array.

Deleted: NOTE¶
Deleted: Object.keys must return that same order

Deleted: and

Deleted: Get

Deleted: this object

Deleted: Compute

Deleted: a

Deleted: by

Deleted: Result(12)

Deleted: <#>Return Result(23).¶

Deleted: Call

Deleted: Result(2)

Deleted: <#>Call the `[[Call]]` internal method of `Result(2)` passing *O* as the `this` value and no arguments.¶

Deleted: Result(4)

Deleted: <#>This function returns the result of calling `toString()`.¶

The first parameter to this function is likely to be used in a future version of this standard; it is recommended that implementations do not use this parameter position for anything else.

15.2.4.4 Object.prototype.valueOf ()

The valueOf method returns its this value. If the object is the result of calling the Object constructor with a host object (15.2.2.1), it is implementation-defined whether valueOf returns its this value or another value such as the host object originally passed to the constructor.

15.2.4.5 Object.prototype.hasOwnProperty (V)

When the hasOwnProperty method is called with argument V, the following steps are taken:

1. Let O be the result of calling ToObject passing the this object as the argument.
2. Let P be ToString(V).
3. Let desc be the result of calling the [[GetOwnProperty]] internal method of O passing P as the argument.
4. If desc is undefined, return false.
5. Return true.

NOTE

Unlike [[HasProperty]] (8.12.7), this method does not consider objects in the prototype chain.

15.2.4.6 Object.prototype.isPrototypeOf (V)

When the isPrototypeOf method is called with argument V, the following steps are taken:

1. Let O be the result of calling ToObject passing the this object as the argument.
2. If V is not an object, return false.
3. Repeat
 - a. Let V be the value of the [[Prototype]] internal property of V.
 - b. if V is null, return false
 - c. If O and V refer to the same object, return true.

15.2.4.7 Object.prototype.propertyIsEnumerable (V)

When the propertyIsEnumerable method is called with argument V, the following steps are taken:

1. Let O be the result of calling ToObject passing the this object as the argument.
2. Let P be ToString(V).
3. Let desc be the result of calling the [[GetOwnProperty]] internal method of O passing P as the argument.
4. If desc is undefined, return false.
5. Return the value of desc.[[Enumerable]].

NOTE

This method does not consider objects in the prototype chain.

15.2.5 Properties of Object Instances

Object instances have no special properties beyond those inherited from the Object prototype object.

15.3 Function Objects

15.3.1 The Function Constructor Called as a Function

When Function is called as a function rather than as a constructor, it creates and initialises a new Function object. Thus the function call Function(...) is equivalent to the object creation expression new Function(...) with the same arguments.

15.3.1.1 Function (p1, p2, ... , pn, body)

When the Function function is called with some arguments p1, p2, ... , pn, body (where n might be 0, that is, there are no "p" arguments, and where body might also not be provided), the following steps are taken:

1. Create and return a new Function object as if the standard built-in constructor Function was used in a new expression, with the same arguments (15.3.2.1).

Deleted: Call

Deleted: Call

Deleted: Result(2)

Deleted: If O doesn't have a property with the name given by Result(2), return false

Deleted: Result(3)

Deleted: 8.6.2.4

Deleted: or if they refer to objects joined to each other (13.1.2)

Deleted: <#>Go to step 3.¶

Deleted: Call

Deleted: Call

Deleted: Result(2)

Deleted: If O doesn't have a property with the name given by Result(2), return false

Deleted: Result(3)

Deleted: <#>If the property has the DontEnum attribute, return false.¶

Deleted: Result(3)

Deleted: true

Deleted: function

Deleted: had been called

15.3.2 The Function Constructor

When **Function** is called as part of a **new** expression, it is a constructor: it initialises the newly created object.

15.3.2.1 new Function (p1, p2, ... , pn, body)

The last argument specifies the body (executable code) of a function; any preceding arguments specify formal parameters.

When the **Function** constructor is called with some arguments *p1*, *p2*, ... , *pn*, *body* (where *n* might be 0, that is, there are no “*p*” arguments, and where *body* might also not be provided), the following steps are taken:

1. Let *argCount* be the total number of arguments passed to this function invocation.
2. Let *P* be the empty string.
3. If *argCount* = 0, let *body* be the empty string.
4. Else if *argCount* = 1, let *body* be that argument.
5. Else, *argCount* > 1
 - a. Let *firstArg* be the first argument.
 - b. Let *P* be ToString(*firstArg*).
 - c. Let *k* be 2.
 - d. Repeat, while *k* < *argCount*
 - i. Let *nextArg* be the *k*th argument.
 - ii. Let *P* be the result of concatenating the previous value of *P*, the string “,” (a comma), and ToString(*nextArg*).
 - iii. Increase *k* by 1.
 - e. Let *body* be the *k*th argument.
6. Call ToString(*body*).
7. If *P* is not parsable as a *FormalParameterList*_{opt} then throw a **SyntaxError** exception.
8. If *body* is not parsable as a *FunctionBody* then throw a **SyntaxError** exception.
9. Return a new **Function** object as specified in 13.2 with parameters specified by parsing *P* as a *FormalParameterList*_{opt} and body specified by parsing *body* as a *FunctionBody*. Pass in **the Global Environment** as the *Scope* parameter and the empty string as *Name*.

A **prototype** property is automatically created for every function, to provide for the possibility that the function will be used as a constructor.

NOTE

It is permissible but not necessary to have one argument for each formal parameter to be specified. For example, all three of the following expressions produce the same result:

```

new Function("a", "b", "c", "return a+b+c")
new Function("a, b, c", "return a+b+c")
new Function("a,b", "c", "return a+b+c")

```

15.3.3 Properties of the Function Constructor

The value of the internal **[[Prototype]]** property of the **Function** constructor is the **Function** prototype object (15.3.4).

The value of the internal **[[Extensible]]** property of the **Function** constructor is **true**.

The **Function** constructor has properties named “**caller**” and “**arguments**” whose initial value is **null**. These properties have attributes: attribute **[[Writable]]**: **false**, **[[Enumerable]]**: **false**, **[[Configurable]]**: **false**. An ECMAScript implementation must not associate any implementation specific behaviour with access of these properties.

The **Function** constructor has the following properties:

15.3.3.1 Function.prototype

The initial value of **Function.prototype** is the **Function** prototype object (15.3.4).

Deleted: no arguments were given

Deleted: and go to step 13

Deleted: If

Deleted: one argument was given

Deleted: and go to step 13

Deleted: Result(4)

Deleted: Result(4)

Deleted: <#>If *k* equals the number of arguments, let *body* be the *k*th argument and go to step 13.¶

Deleted: Result(8)

Deleted: <#>Call ToString(Result(8)),¶

Deleted: Result(9)

Deleted: Go to step 7

Deleted: Create

Deleted: a scope chain consisting of the global object

Deleted: <#>Return Result(16).¶

Deleted: Besides the internal properties and the **length** property (whose value is 1), the

This property has the attributes { **[[Writable]]: false, [[Enumerable]]: false, [[Configurable]]: false** }.

Deleted: DontEnum, DontDelete, ReadOnly

15.3.3.2 Function.length

This is a data property with an initial value of 1. This property has the attributes { **[[Writable]]: false, [[Enumerable]]: false, [[Configurable]]: false** }.

Deleted: The

15.3.4 Properties of the Function Prototype Object

The Function prototype object is itself a Function object (its **[[Class]]** is **"Function"**) that, when invoked, accepts any arguments and returns **undefined**.

The value of the internal **[[Prototype]]** property of the Function prototype object is the standard built-in Object prototype object (15.2.4). The initial value of the internal **[[Extensible]]** property of the Function prototype object is **true**.

Deleted: 15.3.2.1

It is a function with an "empty body"; if it is invoked, it merely returns **undefined**.

The Function prototype object does not have a **valueOf** property of its own; however, it inherits the **valueOf** property from the Object prototype Object.

15.3.4.1 Function.prototype.constructor

The initial value of **Function.prototype.constructor** is the built-in **Function** constructor.

15.3.4.2 Function.prototype.toString ()

An implementation-dependent representation of the function is returned. This representation has the syntax of a *FunctionDeclaration*. Note in particular that the use and placement of white space, line terminators, and semicolons within the representation string is implementation-dependent.

The **toString** function is not generic; it throws a **TypeError** exception if its **this** value is not a Function object. Therefore, it cannot be transferred to other kinds of objects for use as a method.

15.3.4.3 Function.prototype.apply (thisArg, argArray)

When the **apply** method is called on an object *func* with arguments *thisArg* and *argArray* the following steps are taken:

1. If **IsCallable(func)** is **false**, then throw a **TypeError** exception.
2. If *argArray* is **null** or **undefined**, then
 - a. Return the result of calling the **[[Call]]** internal method of *func*, providing *thisArg* as the **this** value and an empty list of arguments.
3. If **Type(argArray)** is not **Object**, then throw a **TypeError** exception.
4. Let *len* be the result of calling the **[[Get]]** internal method of *argArray* with argument **"length"**.
5. If *len* is **null** or **undefined**, then throw a **TypeError** exception.
6. Let *n* be **ToUint32(len)**.
7. If *n* is not equal to **ToNumber(len)**, then throw a **TypeError** exception.
8. If *n* is greater than an implementation-defined limit on the number of arguments to a function, then throw a **RangeError** exception.
9. Let *argList* be an empty List.
10. Let *index* be 0.
11. Repeat while *index* < *n*
 - a. Let *indexName* be **ToString(index)**.
 - b. Let *nextArg* be the result of calling the **[[Get]]** internal method of *argArray* with *indexName* as the argument.
 - c. Append *nextArg* as the last element of *argList*.
 - d. Set *index* to *index* + 1.
12. Return the result of calling the **[[Call]]** internal method of *func*, providing *thisArg* as the **this** value and *argList* as the list of arguments.

The **length** property of the **apply** method is 2.

15.3.4.4 Function.prototype.call (thisArg [, arg1 [, arg2, ...]])

When the **call** method is called on an object *func* with argument *thisArg* and optional arguments *arg1*, *arg2* etc, the following steps are taken:

1. If **IsCallable(func)** is **false**, then throw a **TypeError** exception.

Deleted: The **apply** method takes two arguments, *thisArg* and *argArray*, and performs a function call using the **[[Call]]** property of the object. If the object does not have a **[[Call]]** property, a **TypeError** exception is thrown.¶
If *thisArg* is **null** or **undefined**, the called function is passed the global object as the **this** value. Otherwise, the called function is passed **ToObject(thisArg)** as the **this** value.¶
If *argArray* is **null** or **undefined**, the called function is passed no arguments. Otherwise, if *argArray* is neither an array nor an arguments object (see 10.1.83.2), a **TypeError** exception is thrown. If *argArray* is either an array or an arguments object, the function is passed the **(ToUint32(argArray.length))** arguments *argArray*[0], *argArray*[1], ..., *argArray*[**ToUint32(argArray.length)**-1].¶

2. Let *argList* be an empty List.
3. If this method was called with more than one argument then in left to right order starting with *arg1* append each argument as the last element of *argList*
4. Return the result of calling the `[[Call]]` internal method of *func*, providing *thisArg* as the **this** value and *argList* as the list of arguments.

The **length** property of the **call** method is 1.

15.3.4.5 **Function.prototype.bind (thisArg [, arg1 [, arg2, ...]])**

The **bind** method takes one or more arguments, *thisArg* and (optionally) *arg1*, *arg2*, etc. and returns a new function object by performing the following steps:

1. Let *Target* be the **this** object.
2. If `IsCallable(Target)` is **false**, throw a **TypeError** exception.
3. Let *A* be a new (possibly empty) internal list of all of the argument values provided after *thisArg* (*arg1*, *arg2* etc), in order.
4. Let *F* be a new native ECMAScript object.
5. Set the `[[TargetFunction]]` internal property of *F* to *Target*.
6. Set the `[[BoundThis]]` internal property of *F* to the value of *thisArg*.
7. Set the `[[BoundArgs]]` internal property of *F* to *A*.
8. Set the `[[Class]]` internal property of *F* to **"Function"**.
9. Set the `[[Prototype]]` internal property of *F* to the standard built-in Function prototype object as specified in 15.3.3.1.
10. Set the `[[Call]]` internal property of *F* as described in 15.3.4.5.1.
11. Set the `[[Construct]]` internal property of *F* as described in 15.3.4.5.2.
12. Set the `[[HasInstance]]` internal property of *F* as described in 15.3.4.5.3.
13. The `[[Scope]]` internal property of *F* is unused and need not exist.
14. If the `[[Class]]` internal property of *Target* is **"Function"**, then
 - a. Let *L* be the **length** property of *Target* minus the length of *A*.
 - b. Set the **length** own property of *F* to either 0 or *L*, whichever is larger.
15. Else set the **length** own property of *F* to 0.
16. The **length** own property of *F* is given attributes as specified in 15.3.5.1.
17. Set the `[[Extensible]]` property of *F* to **true**.
18. Let *targetName* be the result of calling the `[[Get]]` internal method of *Target* passing **"name"** as the argument.
19. Let *stringName* be `ToString(targetName)`.
20. If *stringName* is the empty String then let *stringName* be **"anonymous function"**.
21. Let *descriptiveName* be the result of concatenating the String **"bind "** and *stringName*.
22. Call the `[[DefineOwnProperty]]` internal method of *F* with arguments **"name"**, Property Descriptor `{[[Value]]: descriptiveName, [[Writable]]: true, [[Enumerable]]: false, [[Configurable]]: true}`, and **false**.
23. Return *F*.

The **length** property of the **bind** method is 1.

15.3.4.5.1 **[[Call]]**

When the `[[Call]]` internal method of a function object, *F*, that was created using the **bind** function is called with a **this** value and a list of arguments *ExtraArgs* the following steps are taken:

1. Let *boundArgs* be the value of *F*'s `[[BoundArgs]]` internal property.
2. Let *boundThis* be the value of *F*'s `[[BoundThis]]` internal property.
3. Let *target* be the value of *F*'s `[[TargetFunction]]` internal property.
4. Let *args* be a new list containing the same values as the list *boundArgs* in the same order followed by the same values as the list *ExtraArgs* in the same order.
5. Return the result of calling the `[[Call]]` internal method of *target* providing *boundThis* as the **this** value and providing *args* as the arguments.

15.3.4.5.2 **[[Construct]]**

When the `[[Construct]]` internal method of a function object, *F*, that was created using the **bind** function is called with a list of arguments *ExtraArgs* the following steps are taken:

1. Let *target* be the value of *F*'s `[[TargetFunction]]` internal property.

Deleted: The **call** method takes one or more arguments, *thisArg* and (optionally) *arg1*, *arg2* etc, and performs a function call using the `[[Call]]` property of the object. If the object does not have a `[[Call]]` property, a **TypeError** exception is thrown. The called function is passed *arg1*, *arg2*, etc. as the arguments. If *thisArg* is **null** or **undefined**, the The called function is passed the global object as the **this** value. Otherwise, the called function is passed `ToObject(thisArg)` as the **this** value.

Deleted: C

Deleted: reate a

Deleted: and let *F* be that object

Deleted: null

Deleted: L

Deleted: If the `[[Class]]` property of *Target* is **"Function"**, then
`<#>Let boundProto be the value of the prototype property of Target`
`<#>Else`
`<#>Let boundProto be the result of creating a new object as would be constructed by the expression new Object() where Object is the standard built-in constructor with that name.`
`<#>Set the constructor own property of boundProto to F. This property has attributes { [[Writable]]: true, [[Enumerable]]: false, [[Configurable]]: true }.`
`<#>Set the prototype property of F to boundProto.`
 The **prototype** property of *F* is given attributes as specified in 15.3.5.2.

2. If *target* has no `[[Construct]]` internal method, a **TypeError** exception is thrown.
3. Let *boundArgs* be the value of *F*'s `[[BoundArgs]]` internal property.
4. Let *args* be a new list containing the same values as the list *boundArgs* in the same order followed by the same values as the list *ExtraArgs* in the same order.
5. Return the result of calling the `[[Construct]]` internal method of *target* providing *args* as the arguments.

15.3.4.5.3 `[[HasInstance]]` (V)

When the `[[HasInstance]]` internal method of a function object *F*, that was created using the `bind` function is called with argument *V* the following steps are taken:

1. Let *target* be the value of *F*'s `[[TargetFunction]]` internal property.
2. If *target* has no `[[HasInstance]]` internal method, a **TypeError** exception is thrown.
3. Return the result of calling the `[[HasInstance]]` internal method of *target* providing *V* as the argument.

15.3.5 Properties of Function Instances

In addition to the required internal properties, every function instance has a `[[Call]]` property, a `[[Construct]]` property, a `[[FormalParameters]]` property, a `[[Code]]` property, and a `[[Scope]]` property (see 8.6.2 and 13.2). The value of the `[[Class]]` property is **"Function"**.

Function instances that correspond to strict mode functions have properties named "caller" and "arguments" whose initial value is null. These properties have attributes: attribute { [[Writable]]: false, [[Enumerable]]: false, [[Configurable]]: false }. An ECMAScript implementation must not associate any implementation specific behaviour with accesses of these property from strict mode function code.

15.3.5.1 length

The value of the `length` property is an integer that indicates the "typical" number of arguments expected by the function. However, the language permits the function to be invoked with some other number of arguments. The behaviour of a function when invoked on a number of arguments other than the number specified by its `length` property depends on the function. This property has the attributes { `[[Writable]]: false`, `[[Enumerable]]: false`, `[[Configurable]]: false` }.

Deleted: usually

Deleted: DontDelete, ReadOnly, DontEnum

15.3.5.2 prototype

The value of the `prototype` property is used to initialise the internal `[[Prototype]]` property of a newly created object before the Function object is invoked as a constructor for that newly created object. This property has the attribute { `[[Writable]]: true`, `[[Enumerable]]: false`, `[[Configurable]]: false` }.

Deleted: DontDelete

15.3.5.3 `[[HasInstance]]` (V)

Assume *F* is a Function object.

When the `[[HasInstance]]` method of *F* is called with value *V*, the following steps are taken:

1. If *V* is not an object, return **false**.
2. Let *O* be the result of calling the `[[Get]]` internal method of *F* with property name **"prototype"**.
3. If *O* is not an object, throw a **TypeError** exception.
4. Repeat
 - a. Let *V* be the value of the `[[Prototype]]` internal property of *V*.
 - b. If *V* is **null**, return **false**.
 - c. If *O* and *V* refer to the same object, return **true**.

Deleted: Call

Deleted: <#>Let O be Result(2).¶

Deleted: or if they refer to objects joined to each other (13.1.2)

Deleted: <#>Go to step 5.¶

15.3.5.4 name

The value of the name property is the name of the function, or an empty string if the function is anonymous. This property has the attributes { [[Writable]]: true, [[Enumerable]]: false, [[Configurable]]: true }.

Deleted: false

Deleted: false

15.4 Array Objects

Array objects give special treatment to a certain class of property names. A property name *P* (in the form of a string value) is an *array index* if and only if `ToString(ToUint32(P))` is equal to *P* and `ToUint32(P)` is not

equal to $2^{32}-1$. Properties whose property name is an array index may only be data properties. Every Array object has a **length** property whose value is always a nonnegative integer less than 2^{32} . The value of the **length** property is numerically greater than the name of every property whose name is an array index; whenever a property of an Array object is created or changed, other properties are adjusted as necessary to maintain this invariant. Specifically, whenever a property is added whose name is an array index, the **length** property is changed, if necessary, to be one more than the numeric value of that array index; and whenever the **length** property is changed, every property whose name is an array index whose value is not smaller than the new length is automatically deleted. This constraint applies only to own properties of an Array object and is unaffected by **length** or array index properties that may be inherited from its prototypes.

Deleted: the

Deleted: itself

15.4.1 The Array Constructor Called as a Function

When **Array** is called as a function rather than as a constructor, it creates and initialises a new Array object. Thus the function call **Array(...)** is equivalent to the object creation expression **new Array(...)** with the same arguments.

15.4.1.1 **Array** ([item1 [, item2 [, ...]]])

When the **Array** function is called the following steps are taken:

1. Create and return a new Array object exactly as if the standard built-in constructor **Array** was used in a new expression with the same arguments (15.4.2).

Deleted: array

Deleted: had been called

15.4.2 The Array Constructor

When **Array** is called as part of a **new** expression, it is a constructor: it initialises the newly created object.

15.4.2.1 **new Array** ([item0 [, item1 [, ...]]])

This description applies if and only if the Array constructor is given no arguments or at least two arguments.

The **[[Prototype]]** property of the newly constructed object is set to the original Array prototype object, the one that is the initial value of **Array.prototype** (15.4.3.1).

The **[[Class]]** property of the newly constructed object is set to **"Array"**.

The **[[Extensible]]** property of the newly constructed object is set to **true**.

The **length** property of the newly constructed object is set to the number of arguments.

The **0** property of the newly constructed object is set to *item0* (if supplied); the **1** property of the newly constructed object is set to *item1* (if supplied); and, in general, for as many arguments as there are, the *k* property of the newly constructed object is set to argument *k*, where the first argument is considered to be argument number **0**.

15.4.2.2 **new Array** (*len*)

The **[[Prototype]]** property of the newly constructed object is set to the original Array prototype object, the one that is the initial value of **Array.prototype** (15.4.3.1). The **[[Class]]** property of the newly constructed object is set to **"Array"**. The **[[Extensible]]** property of the newly constructed object is set to **true**.

If the argument *len* is a Number and **ToUint32**(*len*) is equal to *len*, then the **length** property of the newly constructed object is set to **ToUint32**(*len*). If the argument *len* is a Number and **ToUint32**(*len*) is not equal to *len*, a **RangeError** exception is thrown.

If the argument *len* is not a Number, then the **length** property of the newly constructed object is set to **1** and the **0** property of the newly constructed object is set to *len*.

15.4.3 Properties of the Array Constructor

The value of the internal **[[Prototype]]** property of the Array constructor is the Function prototype object (15.3.4).

Besides the internal properties and the **length** property (whose value is **1**), the Array constructor has the following properties:

15.4.3.1 Array.prototype

The initial value of **Array.prototype** is the Array prototype object (15.4.4).

This property has the attributes { **[[Writable]]: false, [[Enumerable]]: false, [[Configurable]]: false** }.

Deleted: DontEnum, DontDelete, ReadOnly

15.4.3.2 Array.isArray (arg)

The **isArray** function takes one argument *arg*, and returns the Boolean value **true** if the argument is an object behaves as an Array; otherwise it return **false**. The following steps are taken:

1. If **Type**(arg) is not Object, return false.
2. If the value of the **[[Class]]** internal property of *arg* is "Array", then return true.
3. Return false.

Deleted: arg has the internal **[[isArray]]** property and the value of the property is **true**

15.4.4 Properties of the Array Prototype Object

The value of the internal **[[Prototype]]** property of the Array prototype object is the **standard built-in** Object prototype object (15.2.4).

Deleted: 15.2.3.1

The Array prototype object is itself an array; its **[[Class]]** is "Array", and it has a **length** property (whose initial value is +0) and the special internal **[[DefineOwnProperty]]** internal method described in 15.4.5.1.

Deleted: ThrowingPut

Deleted: 15.2.3.1

In following descriptions of functions that are properties of the Array prototype object, the phrase "this object" refers to the object that is the **this** value for the invocation of the function. It is permitted for the **this** to be an object for which the value of the internal **[[Class]]** internal property is not "Array".

Deleted: It also has the internal property **[[isArray]]** whose value is **true**.

NOTE

The Array prototype object does not have a **valueOf** property of its own; however, it inherits the **valueOf** property from the Object prototype Object.

15.4.4.1 Array.prototype.constructor

The initial value of **Array.prototype.constructor** is the built-in **Array** constructor.

15.4.4.2 Array.prototype.toString ()

The result of calling this function is the same as if the **standard built-in method** **Array.prototype.join** were invoked for this object with no argument.

Deleted: method

The **toString** function is not generic; it throws a **TypeError** exception if the value of the **[[Class]]** internal property of its **this** value is not "Array". Therefore, it cannot be transferred to other kinds of objects for use as a method.

Deleted: an Array object

15.4.4.3 Array.prototype.toLocaleString ()

The elements of the array are converted to strings using their **toLocaleString** methods, and these strings are then concatenated, separated by occurrences of a separator string that has been derived in an implementation-defined locale-specific way. The result of calling this function is intended to be analogous to the result of **toString**, except that the result of this function is intended to be locale-specific.

The result is calculated as follows:

1. Let *array* be the **this** value.
2. If the the value of the **[[Class]]** internal property of *array* is not "Array", throw a **TypeError** exception.
3. Let *arrayLen* be the result of calling the **[[Get]]** internal method of *array* with argument "length".
4. Let *len* be **ToUint32**(*arrayLen*).
5. Let *separator* be the **String value for the** list-separator string appropriate for the host environment's current locale (this is derived in an implementation-defined way).
6. If *len* is zero, return the empty string.
7. Let *firstElement* be the result of calling the **[[Get]]** internal method of *array* with argument "0".
8. If *firstElement* is **undefined** or **null**, then

Deleted: Call

Deleted: this object

Deleted: Call

Deleted: Result(1)

Deleted: ~~Call ToString(separator)~~

Deleted: Result(2)

Deleted: Call

Deleted: this object

Deleted: Result(6)

Deleted: use the empty string; otherwise, call **ToObject**(**Result**(6)).**toLocaleString**().

- a. Let R be the empty string.
- 9. Else
 - a. Let $elementObj$ be `ToObject(firstElement)`.
 - b. Let $func$ be the result of calling the `[[Get]]` internal method of $elementObj$ with argument `"toLocaleString"`.
 - c. If `IsCallable(func)` is false, throw a `TypeError` exception.
 - d. Let R be the result of calling the `[[Call]]` internal method of $func$ providing $elementObj$ as the `this` value and an empty arguments list.
- 10. Let k be 1.
- 11. Repeat, while $k < len$
 - a. Let S be a string value produced by concatenating R and $separator$.
 - b. Let $nextElement$ be the result of calling the `[[Get]]` internal method of $array$ with argument `ToString(k)`.
 - c. If $nextElement$ is undefined or null, then
 - i. Let R be the empty string.
 - d. Else
 - i. Let $elementObj$ be `ToObject(nextElement)`.
 - ii. Let $func$ be the result of calling the `[[Get]]` internal method of $elementObj$ with argument `"toLocaleString"`.
 - iii. If `IsCallable(func)` is false, throw a `TypeError` exception.
 - iv. Let R be the result of calling the `[[Call]]` internal method of $func$ providing $elementObj$ as the `this` value and an empty arguments list.
 - e. Let R be a string value produced by concatenating S and R .
 - f. Increase k by 1.
- 12. Return R .

The `toLocaleString` function is not generic; it throws a `TypeError` exception if the value of the `[[Class]]` internal property of its `this` value is not `"Array"`. Therefore, it cannot be transferred to other kinds of objects for use as a method.

NOTE

The first parameter to this function is likely to be used in a future version of this standard; it is recommended that implementations do not use this parameter position for anything else.

15.4.4.4 Array.prototype.concat ([item1 [, item2 [, ...]]])

When the `concat` method is called with zero or more arguments $item1$, $item2$, etc., it returns an array containing the array elements of the object followed by the array elements of each argument in order.

The following steps are taken:

- 1. Let A be a new array created as if by the expression `new Array()` where `Array` is the standard built-in constructor with that name.
- 2. Let n be 0.
- 3. Let $items$ be an internal List whose first element is the `this` value and whose subsequent elements are, in left to right order, the arguments that were passed to this function invocation.
- 4. Repeat, while $items$ is not empty
 - a. Remove the first element from $items$ and let E be the value of the element.
 - b. If the value of the `[[Class]]` internal property of E is `"Array"`, then
 - i. Let k be 0.
 - ii. Let len be the result of calling the `[[Get]]` internal method of E with argument `"length"`.
 - iii. Repeat, while $k < len$
 - 1. Let P be `ToString(k)`.
 - 2. Let $exists$ be the result of calling the `[[HasProperty]]` internal method of E with P .
 - 3. If $exists$ is true, then
 - 4. Call `ToString(n)`.
 - 5. Let $subElement$ be the result of calling the `[[Get]]` internal method of E with argument P .

Deleted: be Result(7)
Deleted:)

Deleted: <#>If k equals Result(2), return R .
Deleted: Result(4)
Deleted: Call
Deleted: this object

Deleted: <#>If Result(12) is undefined or null, use the empty string; otherwise, call `ToObject(Result(12)).toLocaleString()`.
Deleted: Result(13)
Deleted: Go to step 10.
Deleted: its `this` value is not an Array object

Deleted: Let
Deleted: this object
Deleted: not
Deleted: an Array object
Deleted: go to step 16.
Deleted: Call
Deleted: If k equals Result(6) go to step 19.
Deleted: Call
Deleted: E has a property named by Result(8), go to step 10, but if E has no property named by Result(8), go to step 13.
Deleted: Call
Deleted: Result(8)

6. Call the `[[DefineOwnProperty]]` internal method of *A* with arguments `ToString(n)`, `Property Descriptor {[[Value]]: subElement, [[Writable]]: true, [[Enumerable]]: true, [[Configurable]]: true}`, and `false`.
7. Increase *n* by 1.
8. Increase *k* by 1.
- c. `Else, E is not an Array`
 - i. Call the `[[DefineOwnProperty]]` internal method of *A* with arguments `ToString(n)`, `Property Descriptor {[[Value]]: E, [[Writable]]: true, [[Enumerable]]: true, [[Configurable]]: true}`, and `false`.
 - ii. Increase *n* by 1.

- Deleted: Put
- Deleted: Result(10)
- Deleted: Result(11)
- Deleted: Go to step 7.
- Deleted: <#>Call ToString(*n*),¶
- Deleted: Call the [[Put]] method of A with arguments Result(16) and E
- Deleted: <#>Get the next argument in the argument list; if there are no more arguments, go to step 22.¶
<#>Let E be Result(19),¶
<#>Go to step 4.¶
<#>Call the [[Put]] method of A with arguments "length" and *n*.¶

The `length` property of the `concat` method is 1.

NOTE

The `concat` function is intentionally generic; it does not require that its `this` value be an Array object. Therefore it can be transferred to other kinds of objects for use as a method. Whether the `concat` function can be applied successfully to a host object is implementation-dependent.

15.4.4.5 Array.prototype.join (separator)

The elements of the array are converted to strings, and these strings are then concatenated, separated by occurrences of the `separator`. If no separator is provided, a single comma is used as the separator.

The `join` method takes one argument, `separator`, and performs the following steps:

1. Let *lenVal* be the result of calling the `[[Get]]` internal method of this object with argument `"length"`.
2. Let *len* be `ToUint32(lenVal)`.
3. If `separator` is `undefined`, let `separator` be the single-character string `,`.
4. Let *sep* be `ToString(separator)`.
5. If *len* is zero, return the empty string.
6. Let *element0* be the result of calling the `[[Get]]` internal method of this object with argument `"0"`.
7. If *element0* is `undefined` or `null`, let *R* be the empty string; otherwise, let *R* be `ToString(element0)`.
8. Let *k* be 1.
9. Repeat, while *k* < *len*
 - a. Let *S* be the string value produced by concatenating *R* and *sep*.
 - b. Let *element* be the result of calling the `[[Get]]` internal method of this object with argument `ToString(k)`.
 - c. If *element* is `undefined` or `null`, let *next* be the empty string; otherwise, let *next* be `ToString(element)`.
 - d. Let *R* be a string value produced by concatenating *S* and *next*.
 - e. Increase *k* by 1.
10. Return *R*.

- Deleted: Call
- Deleted: Call
- Deleted: Result(1)
- Deleted: Call
- Deleted: Result(2)
- Deleted: Call
- Deleted: Result(6)
- Deleted: use the
- Deleted: call
- Deleted: Result(6)
- Deleted: <#>Let R be Result(7),¶
- Deleted: If k equals Result(2), return R.
- Deleted: a
- Deleted: Result(4)
- Deleted: Call
- Deleted: Result(12)
- Deleted: use
- Deleted: call
- Deleted: Result(12)
- Deleted: Result(13)
- Deleted: Go to step 10.
- Deleted: Call
- Deleted: Call
- Deleted: Result(1)
- Deleted: Result(2)
- Deleted: not
- Deleted: go to step 6.
- Deleted: Result(2)

The `length` property of the `join` method is 1.

NOTE

The `join` function is intentionally generic; it does not require that its `this` value be an Array object. Therefore, it can be transferred to other kinds of objects for use as a method. Whether the `join` function can be applied successfully to a host object is implementation-dependent.

15.4.4.6 Array.prototype.pop ()

The last element of the array is removed from the array and returned.

1. Let *lenVal* be the result of calling the `[[Get]]` method of this object with argument `"length"`.
2. Let *len* be `ToUint32(lenVal)`.
3. If *len* is zero,
 - a. Call the `[[Put]]` internal method of this object with arguments `"length"` and `0`.
 - b. Return `undefined`.
4. Else, *len* > 0

- a. Let *indx* be ToString(*len*-1).
- b. Let *element* be the result of calling the `[[Get]]` internal method of this object with argument *indx*.
- c. Call the `[[Delete]]` method of this object with arguments *indx* and **false**.
- d. Call the `[[Put]]` method of this object with arguments **"length"** and *indx*.
- e. Return *element*.

NOTE

The **pop** function is intentionally generic; it does not require that its **this** value be an Array object. Therefore it can be transferred to other kinds of objects for use as a method. Whether the **pop** function can be applied successfully to a host object is implementation-dependent.

15.4.4.7 Array.prototype.push ([item1 [, item2 [, ...]]])

The arguments are appended to the end of the array, in the order in which they appear. The new length of the array is returned as the result of the call.

When the **push** method is called with zero or more arguments *item1*, *item2*, etc., the following steps are taken:

- 1. Let *lenVal* be the result of calling the `[[Get]]` method of this object with argument **"length"**.
- 2. Let *n* be ToUint32(*lenVal*).
- 3. Let *items* be an internal List whose elements are, in left to right order, the arguments that were passed to this function invocation.
- 4. Repeat, while *items* is not empty
 - a. Remove the first element from *items* and let *E* be the value of the element.
 - b. Call the `[[Put]]` internal method of this object with arguments ToString(*n*) and *E*.
 - c. Increase *n* by 1.
- 5. Call the `[[Put]]` internal method of this object with arguments **"length"** and *n*.
- 6. Return *n*.

The **length** property of the **push** method is 1.

NOTE

The **push** function is intentionally generic; it does not require that its **this** value be an Array object. Therefore it can be transferred to other kinds of objects for use as a method. Whether the **push** function can be applied successfully to a host object is implementation-dependent.

15.4.4.8 Array.prototype.reverse ()

The elements of the array are rearranged so as to reverse their order. The object is returned as the result of the call.

- 1. Let *lenVal* be the result of calling the `[[Get]]` internal method of this object with argument **"length"**.
- 2. Let *len* be ToUint32(*lenVal*).
- 3. Let *middle* be floor(*len*/2).
- 4. Let *k* be 0.
- 5. Repeat, while *k* ≠ *middle*
 - a. Let *upper* be *len*-*k*-1.
 - b. Let *lower* be ToString(*k*).
 - c. Let *upperP* be ToString(*upper*).
 - d. Let *lowerP* be ToString(*lower*).
 - e. Let *lowerValue* be the result of calling the `[[Get]]` internal method of this object with argument *lowerP*.
 - f. Let *upperValue* be the result of calling the `[[Get]]` internal method of this object with argument *upperP*.
 - g. Let *lowerExists* be the result of calling the `[[HasProperty]]` internal method of this object with argument *lowerP*.
 - h. Let *upperExists* be the result of calling the `[[HasProperty]]` internal method of this object with argument *upperP*.
 - i. If *lowerExists* is **true** and *upperExists* is **true**, then

- Deleted: Call
- Deleted: Result(2)
- Deleted: Call
- Deleted: Result(6)
- Deleted: Result(6)
- Deleted: "length"
- Deleted: (Result(2)-1)
- Deleted: Result(7)

- Deleted: Call
- Deleted: the result of calling
- Deleted: Result(1)
- Deleted: <#>Get the next argument in the argument list; if there are no more arguments, go to step 7.¶
- Deleted: Result(3)
- Deleted: <#>Go to step 3.¶

- Deleted: Call
- Deleted: Call
- Deleted: Result(1)
- Deleted: Compute
- Deleted: Result(2)
- Deleted: If
- Deleted: equals
- Deleted: Result(3), return this object.
- Deleted: Compute
- Deleted: Result(2)
- Deleted: Call
- Deleted: Call
- Deleted: Result(6)
- Deleted: Call
- Deleted: Result(7)
- Deleted: Call
- Deleted: method
- Deleted: Result(8)
- Deleted: If this object does not have a property named by Result(8), go to step 19.

- i. Call the [[Put]] method of this object with arguments *lowerP* and *upperValue*.
 - ii. Call the [[Put]] method of this object with arguments *upperP* and *lowerValue*.
 - j. **Else if *lowerExists* is false and *upperExists* is true, then**
 - i. Call the [[Put]] internal method of this object with arguments *lowerP* and *upperValue*.
 - ii. Call the [[Delete]] internal method on this object, with arguments *upperP* and false.
 - k. **Else if *lowerExists* is true and *upperExists* is false, then**
 - i. Call the [[Delete]] internal method on this object, with arguments *lowerP* and false.
 - ii. Call the [[Put]] internal method of this object with arguments *upperP* and *lowerValue*.
 - l. **Else, both *lowerExists* and *upperExists* are false**
 - i. Call the [[Delete]] internal method on this object, with arguments *lowerP* and false.
 - ii. Call the [[Delete]] internal method on this object, with arguments *upperP* and false.
 - m. Increase *k* by 1.
6. **Return this object.**

NOTE

The **reverse** function is intentionally generic; it does not require that its **this** value be an Array object. Therefore, it can be transferred to other kinds of objects for use as a method. Whether the **reverse** function can be applied successfully to a host object is implementation-dependent.

15.4.4.9 Array.prototype.shift ()

The first element of the array is removed from the array and returned.

- 1. Let *lenVal* be the result of calling the [[Get]] method of this object with argument "length".
- 2. Let *len* be ToUint32(*lenVal*).
- 3. If *len* is zero, then
 - a. Call the [[Put]] internal method of this object with arguments "length" and 0.
 - b. Return **undefined**.
- 4. Let *first* be the result of calling the [[Get]] internal method of this object with argument "0".
- 5. Let *k* be 1.
- 6. Repeat, while *k* < *len*.
 - a. Let *from* be ToString(*k*).
 - b. Let *to* be ToString(*k*-1).
 - c. Let *fromPresent* be the result of calling the [[HasProperty]] internal method of this object with argument *from*.
 - d. If *fromPresent* is true, then
 - i. Let *fromVal* be the result of calling the [[Get]] internal method of this object with argument *from*.
 - ii. Call the [[Put]] internal method of this object with arguments *to* and *fromVal*.
 - e. Else, *fromPresent* is false
 - i. Call the [[Delete]] method of this object with arguments *to* and false.
 - f. Increase *k* by 1.
- 7. Call the [[Delete]] internal method of this object with arguments ToString(*len*-1) and false.
- 8. Call the [[Put]] method of this object with arguments "length" and (*len*-1).
- 9. Return *first*.

NOTE

The **shift** function is intentionally generic; it does not require that its **this** value be an Array object. Therefore it can be transferred to other kinds of objects for use as a method. Whether the **shift** function can be applied successfully to a host object is implementation-dependent.

15.4.4.10 Array.prototype.slice (start, end)

The **slice** method takes two arguments, *start* and *end*, and returns an array containing the elements of the array from element *start* up to, but not including, element *end* (or through the end of the array if *end* is **undefined**). If *start* is negative, it is treated as (*length*+*start*) where *length* is the length of the array. If *end* is negative, it is treated as (*length*+*end*) where *length* is the length of the array. The following steps are taken:

- 1. Let *A* be a new array created as if by the expression **new Array ()** where **Array** is the **standard built-in constructor with that name**.

Deleted: <#>If this object does not have a ...

Deleted: Result(7)

Deleted: Result(10)

Deleted: Result(8)

Deleted: Result(9)

Deleted: Go to step 25.

Deleted: Result(7)

Deleted: Result(10)

Deleted: providing

Deleted: Result(8)

Deleted: as the name of the property to delete

Deleted: .

Deleted: Go to step 25.¶

Deleted: If this object does not have a property ...

Deleted: providing Result(7) as the name of ...

Deleted: Result(8)

Deleted: Result(9)

Deleted: Go to step 25.

Deleted: Call the [[Delete]] method on this ...

Deleted: Call the [[Delete]] method on this ...

Deleted: Go to step 5

Deleted: Call

Deleted: Call

Deleted: Result(1)

Deleted: Result(2)

Deleted: not

Deleted: go to step 6.

Deleted: Result(2)

Deleted: Call

Deleted: If

Deleted: equals Result(2)

Deleted: , go to step 18.

Deleted: Call

Deleted: Call

Deleted: this object has a property named by ...

Deleted: Call

Deleted: Result(9)

Deleted: Result(10)

Deleted: Result(12)

Deleted: Go to step 16.

Deleted: Result(10)

Deleted: <#>Go to step 8.¶

Deleted: Result(2)

Deleted: Result(2)

Deleted: Result(6)

2. Let *lenVal* be the result of calling the `[[Get]]` method of this object with argument "length".
3. Let *len* be `ToUint32(lenVal)`.
4. Let *relativeStart* be `ToInteger(start)`.
5. If *relativeStart* is negative, let *k* be `max((len + relativeStart), 0)`; else let *k* be `min(relativeStart, len)`.
6. If *end* is **undefined**, let *relativeEnd* be *len*; else let *relativeEnd* be `ToInteger(end)`.
7. If *relativeEnd* is negative, let *final* be `max((len + relativeEnd), 0)`; else let *final* be `min(relativeEnd, len)`.
8. Let *n* be 0.
9. Repeat, while *k* ≤ *final*
 - a. Let *Pk* be `Tostring(k)`.
 - b. Let *kPresent* be the result of calling the `[[HasProperty]]` internal method of this object with argument *Pk*.
 - c. If *kPresent* is **true**, then
 - i. Let *kValue* be the result of calling the `[[Get]]` internal method of this object with argument *Pk*.
 - ii. Call the `[[Put]]` internal method of *A* with arguments `Tostring(n)` and *kValue*.
 - d. Increase *k* by 1.
 - e. Increase *n* by 1.
10. Call the `[[Put]]` internal method of *A* with arguments "length" and *n*.
11. Return *A*.

The **length** property of the **slice** method is 2.

NOTE

The **slice** function is intentionally generic; it does not require that its **this** value be an Array object. Therefore it can be transferred to other kinds of objects for use as a method. Whether the **slice** function can be applied successfully to a host object is implementation-dependent.

15.4.4.11 Array.prototype.sort (comparefn)

The elements of this array are sorted. The sort is not necessarily stable (that is, elements that compare equal do not necessarily remain in their original order). If *comparefn* is not **undefined**, it should be a function that accepts two arguments *x* and *y* and returns a negative value if *x* < *y*, zero if *x* = *y*, or a positive value if *x* > *y*.

If *comparefn* is not **undefined** and is not a consistent comparison function for the elements of this array (see below), the behaviour of **sort** is implementation-defined. Let *len* be `ToUint32(this.length)`. If there exist integers *i* and *j* and an object *P* such that all of the conditions below are satisfied then the behaviour of **sort** is implementation-defined:

- 0 ≤ *i* < *len*
- 0 ≤ *j* < *len*
- **this** does not have a property with name `Tostring(i)`
- *P* is obtained by following one or more `[[Prototype]]` properties starting at **this**
- *P* has a property with name `Tostring(j)`

The behaviour of **sort** is also implementation defined if any of the following conditions are true:

The `[[Extensible]]` internal property of this array is **false**.

Any array index property of this array whose name has a numeric value that is a nonnegative integer less than *len* is a data property whose `[[Writable]]` attribute is **false**.

If any property of this array whose property name is a nonnegative integer less than *len* is an accessor property.

Otherwise the following steps are taken.

1. Let *obj* be this object.
2. Let *getLen* be the result of calling the `[[Get]]` internal method of *obj* with argument "length".
3. Let *len* be `ToUint32(getLen)`.

Deleted: Call

Deleted: Call

Deleted: Result(2)

Deleted: Call

Deleted: Result(4)

Deleted: use

Deleted: Result(3)

Deleted: Result(4)

Deleted: use

Deleted: Result(4)

Deleted: Result(3)

Deleted: Result(3)

Deleted: ~~<#>Let *A* be Result(5);~~

Deleted: use

Deleted: Result(3)

Deleted: use

Deleted: Result(7)

Deleted: use

Deleted: Result(3)

Deleted: Result(7)

Deleted: use

Deleted: Result(7)

Deleted: Result(3)

Deleted: If

Deleted: is greater than or equal to Result(8), go to step 19.

Deleted: Call

Deleted: this object has a property named by Result(11), go to step 13; but if this object has no property named by Result(11), then go to step 16.

Deleted: ~~<#>Call ToString(*n*);~~
Call

Deleted: Result(11)

Deleted: Result(13)

Deleted: Result(14)

Deleted: ~~<#>Go to step 10;~~

Deleted: Call

Deleted: this object

Deleted: Call

Deleted: Result(1)

- Perform an implementation-dependent sequence of calls to the `[[Get]]`, `[[Put]]`, and `[[Delete]]` methods of this object and to `SortCompare` (described below), where the first argument for each call to `[[Get]]`, `[[Put]]`, or `[[Delete]]` is a nonnegative integer less than `len` and where the arguments for calls to `SortCompare` are results of previous calls to the `[[Get]]` method.
- Return this object.

Deleted: Result(2)

The returned object must have the following two properties.

- There must be some mathematical permutation π of the nonnegative integers less than `len`, such that for every nonnegative integer j less than `len`, if property `old[j]` existed, then `new[\pi(j)]` is exactly the same value as `old[j]`. But if property `old[j]` did not exist, then `new[\pi(j)]` does not exist.
- Then for all nonnegative integers j and k , each less than `len`, if `SortCompare(j,k) < 0` (see `SortCompare` below), then $\pi(j) < \pi(k)$.

Deleted: Result(2)

Deleted: Result(2)

Deleted: Result(2)

Here the notation `old[j]` is used to refer to the hypothetical result of calling the `[[Get]]` method of this object with argument j before this function is executed, and the notation `new[j]` to refer to the hypothetical result of calling the `[[Get]]` method of this object with argument j after this function has been executed.

A function `comparefn` is a consistent comparison function for a set of values S if all of the requirements below are met for all values a , b , and c (possibly the same value) in the set S : The notation $a <_{CF} b$ means `comparefn(a,b) < 0`; $a =_{CF} b$ means `comparefn(a,b) = 0` (of either sign); and $a >_{CF} b$ means `comparefn(a,b) > 0`.

- Calling `comparefn(a,b)` always returns the same value v when given a specific pair of values a and b as its two arguments. Furthermore, v has type `Number`, and v is not `NaN`. Note that this implies that exactly one of $a <_{CF} b$, $a =_{CF} b$, and $a >_{CF} b$ will be true for a given pair of a and b .
- $a =_{CF} a$ (reflexivity)
- If $a =_{CF} b$, then $b =_{CF} a$ (symmetry)
- If $a =_{CF} b$ and $b =_{CF} c$, then $a =_{CF} c$ (transitivity of $=_{CF}$)
- If $a <_{CF} b$ and $b <_{CF} c$, then $a <_{CF} c$ (transitivity of $<_{CF}$)
- If $a >_{CF} b$ and $b >_{CF} c$, then $a >_{CF} c$ (transitivity of $>_{CF}$)

NOTE

The above conditions are necessary and sufficient to ensure that `comparefn` divides the set S into equivalence classes and that these equivalence classes are totally ordered.

NOTE 2

Calling `comparefn(a, b)` does not modify the `this` object.

When the `SortCompare` [abstract operation](#) is called with two arguments j and k , the following steps are taken:

- Let `jString` be `ToString(j)`.
- Let `kString` be `ToString(k)`.
- If this object does not have a property named by `jString`, and this object does not have a property named by `kString`, return `+0`.
- If this object does not have a property named by `jString`, return `1`.
- If this object does not have a property named by `kString`, return `-1`.
- Let x be the result of calling the `[[Get]]` internal method of this object with argument `jString`.
- Let y be the result of calling the `[[Get]]` internal method of this object with argument `kString`.
- If x and y are both `undefined`, return `+0`.
- If x is `undefined`, return `1`.
- If y is `undefined`, return `-1`.
- If the argument `comparefn` is **not undefined**, then
 - If `IsCallable(comparefn)` is `false`, throw a `TypeError` exception.
 - Return the result of calling the `[[Call]]` internal method of `comparefn` passing `undefined` as the `this` value and with arguments x and y .

Deleted: operator

Deleted: Call

Deleted: Call

Deleted: Result(1)

Deleted: Result(2)

Deleted: Result(1)

Deleted: Result(2)

Deleted: Call

Deleted: Result(1)

Deleted: Call

Deleted: Result(2)

Deleted: Let x be Result(6).
Let y be Result(7).

Deleted: go to step 16.

Deleted: Call

12. Let $xString$ be ToString(x).
13. Let $yString$ be ToString(y).
14. If $xString < yString$, return -1.
15. If $xString > yString$, return 1.
16. Return +0.

NOTE 1

Because non-existent property values always compare greater than **undefined** property values, and **undefined** always compares greater than any other value, undefined property values always sort to the end of the result, followed by non-existent property values.

NOTE 2

The **sort** function is intentionally generic; it does not require that its **this** value be an Array object. Therefore, it can be transferred to other kinds of objects for use as a method. Whether the **sort** function can be applied successfully to a host object is implementation-dependent.

15.4.4.12 **Array.prototype.splice** (**start**, **deleteCount** [, **item1** [, **item2** [, ...]]])

When the **splice** method is called with two or more arguments **start**, **deleteCount** and (optionally) **item1**, **item2**, etc., the **deleteCount** elements of the array starting at array index **start** are replaced by the arguments **item1**, **item2**, etc. The following steps are taken:

1. Let A be a new array created as if by the expression **new Array()** where **Array** is the standard built-in constructor with that name.
2. Let $lenVal$ be the result of calling the **[[Get]]** method of this object with argument "**length**".
3. Let len be ToUint32($lenVal$).
4. Let $relativeStart$ be ToInteger($start$).
5. If $relativeStart$ is negative, let $actualStart$ be $\max((len + relativeStart), 0)$; else let $actualStart$ be $\min(relativeStart, len)$.
6. Let $actualDeleteCount$ be $\min(\max(\text{ToInteger}(\text{deleteCount}), 0), len - actualStart)$.
7. Let k be 0.
8. Repeat, while $k \leq actualDeleteCount$,
 - a. Let $from$ be ToString($relativeStart + k$).
 - b. Let $fromPresent$ be the result of calling the **[[HasProperty]]** internal method of this object with argument $from$.
 - c. If $fromPresent$ is true, then,
 - i. Let $fromValue$ be the result of calling the **[[Get]]** internal method of this object with argument $from$.
 - ii. Call the **[[Put]]** internal method of A with arguments ToString(k) and $fromValue$.
 - d. Increment k by 1.
9. Call the **[[Put]]** internal method of A with arguments "**length**" and $actualDeleteCount$.
10. Let $items$ be an internal List whose elements are, in left to right order, the portion of the actual argument list starting with $item1$. The list will be empty if no such items are present.
11. Let $itemCount$ be the number of elements in $items$.
12. If $itemCount < actualDeleteCount$, then
 - a. Let k be $actualStart$.
 - b. Repeat, while $k \leq (len - actualDeleteCount)$,
 - i. Let $from$ be ToString($k + actualDeleteCount$).
 - ii. Let to be ToString($k + itemCount$).
 - iii. Let $fromPresent$ be the result of calling the **[[HasProperty]]** internal method of this object with argument $from$.
 - iv. If $fromPresent$ is true, then,
 1. Let $fromValue$ be the result of calling the **[[Get]]** internal method of this object with argument $from$.
 2. Call the **[[Put]]** internal method of this object with arguments to and $fromValue$.
 - v. Else, $fromPresent$ is false
 1. Call the **[[Delete]]** internal method of this object with argument to .
 - vi. Increase k by 1.
 - c. Let k be len .
 - d. Repeat, while $k > (len - actualDeleteCount + itemCount)$,

Deleted: Return Result(14).
Call
Deleted: Call
Deleted: Result(16)...String < Result(17)
Deleted: Result(16)...String > Result(17)

Deleted: \uparrow

Deleted: Call the **[[Get]]** method of this object with argument "**length**".
Deleted: Call ToUint32(Result(2)).
Deleted: Call ToInteger($start$).
Deleted: If Result(4) is negative, use $\max((\text{Result}(3) + \text{Result}(4)), 0)$; else use $\min(\text{Result}(4), \text{Result}(3))$.
Deleted: Compute ...et $actualDeleteCount$...
Deleted: If ... equals ...
Deleted: Call ...oString($relativeStart$...
Deleted: If this object has a property named by Result(9), go to step 11; but if this object has no property named by Result(9), then go to step 14.
Deleted: $\langle \# \rangle$ Call ToString(k).
Deleted: Result(11)...and
Deleted: $\langle \# \rangle$ Go to step 8.
Deleted: Compute ...et $itemCount$ be the ...
Deleted: $\langle \# \rangle$ If Result(17) is equal to Result(6), go to step 48.
 $\langle \# \rangle$ If Result(17) is greater than Result(6), go to step 37.
Deleted: Result(5)
Deleted: If ...repeat, while k is equal to...
Deleted: Call ...et $from$ be ToString(...
Deleted: Call ...et to be ToString($k +$...
Deleted: If this object has a property named by Result(22), go to step 25; but if this object has no property named by Result(22), then go to step 28.
Deleted: Call ...he **[[Get]]** internal ...
Deleted: Result(23)...and
Deleted: Go to step 29.
Deleted: Result(23)
Deleted: $\langle \# \rangle$ Go to step 21.
Deleted: If ... k is equal to ... len

- i. Call the `[[Delete]]` internal method of this object with arguments `ToString(k-1)` and `false`.
- ii. Decrease `k` by 1.
- 13. Else if `itemCount > actualDeleteCount`, then
 - a. Let `k` be `(len - actualDeleteCount)`.
 - b. Repeat, while `k > actualStart`,
 - i. Let `from` be `ToString(k + actualDeleteCount - 1)`.
 - ii. Let `to` be `ToString(k + itemCount - 1)`.
 - iii. Let `fromPresent` be the result of calling the `[[HasProperty]]` internal method of this object with argument `from`.
 - iv. If `fromPresent` is `true`, then
 - 1. Let `fromValue` be the result of calling the `[[Get]]` internal method of this object with argument `from`.
 - 2. Call the `[[Put]]` internal method of this object with arguments `to` and `fromValue`.
 - v. Else, `fromPresent` is `false`,
 - 1. Call the `[[Delete]]` internal method of this object with argument `to`.
 - vi. Decrease `k` by 1.
- 14. Let `k` be `actualStart`.
- 15. Repeat, while `items` is not empty
 - a. Remove the first element from `items` and let `E` be the value of that element.
 - b. Call the `[[Put]]` internal method of this object with arguments `ToString(k)` and `E`.
 - c. Increase `k` by 1.
- 16. Call the `[[Put]]` internal method of this object with arguments `"length"` and `(len - actualDeleteCount + itemCount)`.
- 17. Return `A`.

The `length` property of the `splice` method is 2.

NOTE

The `splice` function is intentionally generic; it does not require that its `this` value be an Array object. Therefore it can be transferred to other kinds of objects for use as a method. Whether the `splice` function can be applied successfully to a host object is implementation-dependent.

15.4.4.13 Array.prototype.unshift ([item1 [, item2 [, ...]]])

The arguments are prepended to the start of the array, such that their order within the array is the same as the order in which they appear in the argument list.

When the `unshift` method is called with zero or more arguments `item1`, `item2`, etc., the following steps are taken:

- 1. Let `lenVal` be the result of calling the `[[Get]]` internal method of this object with argument `"length"`.
- 2. Let `k` be `ToUint32(lenVal)`.
- 3. Let `argCount` be the number of actual arguments.
- 4. Repeat, while `k > zero`,
 - a. Let `from` be `ToString(k-1)`.
 - b. Let `to` be `ToString(k+argCount-1)`.
 - c. Let `fromPresent` be the result of calling the `[[HasProperty]]` internal method of this object with argument `from`.
 - d. If `fromPresent` is `true`, then
 - i. Let `fromValue` be the result of calling the `[[Get]]` internal method of this object with argument `from`.
 - ii. Call the `[[Put]]` internal method of this object with arguments `to` and `fromValue`.
 - e. Else, `fromPresent` is `false`
 - i. Call the `[[Delete]]` internal method of this object with arguments `to` and `false`.
 - f. Decrease `k` by 1.
- 5. Let `k` be 0.
- 6. Let `items` be an internal List whose elements are, in left to right order, the arguments that were passed to this function invocation.
- 7. Repeat, while `items` is not empty

Deleted: <#>Call ToString(k-1).¶

Deleted: Result(33)

Deleted: <#>Go to step 32.¶

Deleted: Result(3)

Deleted: Result(6)

Deleted: If

Deleted: is equal to

Deleted: Result(5), go to step 48.

Deleted: Call

Deleted: Result(6)

Deleted: Call

Deleted: Result(17)

Deleted: If this object has a property named by Result(39), go to step 42; but if this object has no property named by Result(39), then go to step 45.

Deleted: <#>Call the `[[Get]]` method of this object with argument Result(39).¶

Deleted: Go to step 46.

Deleted: <#>Call the `[[Delete]]` method of th(...

Deleted: <#>Go to step 38.¶

Deleted: Result(5)

Deleted: Get the next argument in the part of th(...

Deleted: Result(49)

Deleted: <#>Go to step 49.¶

Deleted: Result(3)

Deleted: Result(6)

Deleted: Result(17)

Deleted: Call

Deleted: Call

Deleted: Result(1)

Deleted: Compute

Deleted: <#>Let `k` be Result(2).¶

Deleted: is

Deleted: go to step 15.

Deleted: Call

Deleted: Call

Deleted: Result(3)

Deleted: this object has a property named by (...

Deleted: Call

Deleted: Result(6)

Deleted: Result(7)

Deleted: Result(9)

Deleted: Go to step 13.

Deleted: Result(7)

Deleted: <#>Go to step 5.¶

Deleted: Get the next argument in the part of th(...

- a. Remove the first element from *items* and let *E* be the value of that element.
 - b. Call the `[[Put]]` internal method of this object with arguments `ToString(k)` and *E*.
 - c. Increase *k* by 1.
8. Call the `[[Put]]` internal method of this object with arguments `"length"` and `k+argCount`.
 9. Return `k+argCount`.

The `length` property of the `unshift` method is 1.

NOTE

The `unshift` function is intentionally generic; it does not require that its `this` value be an Array object. Therefore it can be transferred to other kinds of objects for use as a method. Whether the `unshift` function can be applied successfully to a host object is implementation-dependent.

15.4.4.14 Array.prototype.indexOf (searchElement [, fromIndex])

`indexOf` compares *searchElement* to the elements of the array, in ascending order, using the internal SameValue comparison operation (9.12), and if found at one or more positions, returns the index of the first such position; otherwise, -1 is returned.

The optional second argument *fromIndex* defaults to 0 (i.e. the whole array is searched). If it is greater than or equal to the length of the array, -1 is returned, i.e. the array will not be searched. If it is negative, it is used as the offset from the end of the array to compute *fromIndex*. If the computed index is less than 0, the whole array will be searched.

When the `indexOf` method is called with one or two arguments, the following steps are taken:

1. Let *O* be this object.
2. Let *lenValue* be the result of calling the `[[Get]]` internal method of *O* with the argument `"length"`.
3. Let *len* be `ToUint32(lenValue)`.
4. If *len* is 0, return -1.
5. If argument *fromIndex* was passed let *n* be `ToInt32(fromIndex)`; else let *n* be 0.
6. If *n* \geq *len*, return -1.
7. If *n* $>$ 0, then
 - a. Let *k* be *n*.
8. Else, *n* $<$ 0
 - a. Let *k* be *len* - `abs(n)`.
 - b. If *k* is less than 0, then let *k* be 0.
9. Repeat, while *k* $<$ *n*
 - a. Let *elementK* be the result of calling the `[[Get]]` internal method of *O* with the argument `ToString(k)`.
 - b. If `SameValue(searchElement, elementK)` is true, return *k*.
 - c. Increase *k* by 1.
10. Return -1.

NOTE

The `indexOf` function is intentionally generic; it does not require that its `this` value be an Array object. Therefore it can be transferred to other kinds of objects for use as a method. Whether the `indexOf` function can be applied successfully to a host object is implementation-dependent.

15.4.4.15 Array.prototype.lastIndexOf (searchElement [, fromIndex])

`lastIndexOf` compares *searchElement* to the elements of the array in descending order using the internal SameValue comparison operation (9.12), and if found at one or more positions, returns the index of the last such position; otherwise, -1 is returned.

The optional second argument *fromIndex* defaults to the array's length (i.e. the whole array is searched). If it is greater than or equal to the length of the array, the whole array will be searched. If it is negative, it is used as the offset from the end of the array to compute *fromIndex*. If the computed index is less than 0, -1 is returned.

When the `lastIndexOf` method is called with one or two arguments, the following steps are taken:

1. Let *O* be this object.

Deleted: `<#>Call ToString(k)`

Deleted: Result(17)

Deleted: Result(16)

Deleted: `<#>Go to step 16`

Deleted: (

Deleted: Result(2)

Deleted: Result(3)

Deleted: (Result(2)+Result(3))

Deleted: strict equality

Deleted: *E*

Deleted: Call

Deleted: *E*

Deleted: Call

Deleted: Result(2)

Deleted: Result(3)

Deleted: go to step 18

Deleted: Call

Deleted: (if *fromIndex* is undefined this step produces 0).

Deleted: `<#>Let n be Result(5)`

Deleted: is greater than or equal to

Deleted: Result(3)

Deleted: go to step 18

Deleted: is greater than or equal to

Deleted: let *k* be *n*, and go to step 11.

Deleted: Result(3)

Deleted: `<#>Call ToString(k)`

Deleted: Call

Deleted: *E*

Deleted: Result(11)

Deleted: `<#>Perform the comparison SameValue(searchElement, Result(12))`

Deleted: Result(13)

Deleted: false

Deleted: go to step 16

Deleted: `<#>Return k`

Deleted: `<#>If k is less than Result(3) go to step 11`

Deleted: strict equality

Deleted: *E*

2. Let *lenValue* be the result of calling the `[[Get]]` internal method of *O* with the argument `"length"`.
3. Let *len* be `ToUint32(lenValue)`.
4. If *len* is 0, return -1.
5. If argument *fromIndex* was passed let *n* be `ToInt32(fromIndex)`; else let *n* be *len*.
6. If $n > 0$, then let *k* be `max(n, len - 1)`.
7. Else, $n \leq 0$
 - a. Let *k* be `len - abs(n)`.
8. Repeat, while $k > 0$
 - a. Let *elementK* be the result of calling the `[[Get]]` internal method of *O* with the argument `ToString(k)`.
 - b. If `SameValue(searchElement, elementK)` is **true**, return *k*.
 - c. Decrease *k* by 1.
9. Return -1.

NOTE

The **lastIndexOf** function is intentionally generic; it does not require that its **this** value be an Array object. Therefore it can be transferred to other kinds of objects for use as a method. Whether the **lastIndexOf** function can be applied successfully to a host object is implementation-dependent.

15.4.4.16 Array.prototype.every (callbackfn [, thisArg])

callbackfn should be a function that accepts three arguments and returns the boolean value **true** or **false**. **every** calls the provided callback, as a function, once for each element present in the array, in ascending order, until it finds one where *callbackfn* returns **false**. If such an element is found, **every** immediately returns **false**. Otherwise, if *callbackfn* returned **true** for all elements, **every** will return **true**. *callbackfn* is called only for indexes of the array which have assigned values; it is not called for indexes which have been deleted or which have never been assigned values.

If a *thisArg* parameter is provided, it will be used as the **this** value for each invocation of the callback. If it is not provided, **undefined** is used instead.

callbackfn is called with three arguments: the value of the element, the index of the element, and the Array object being traversed.

every does not mutate the array on which it is called.

The range of elements processed by **every** is set before the first call to *callbackfn*. Elements which are appended to the array after the call to **every** begins will not be visited by *callbackfn*. If existing elements of the array are changed, their value as passed to *callbackfn* will be the value at the time **every** visits them; elements that are deleted are not visited. **every** acts like the "for all" quantifier in mathematics. In particular, for an empty array, it returns **true**.

When the **every** method is called with one or two arguments, the following steps are taken:

1. Let *O* be this object.
2. Let *lenValue* be the result of calling the `[[Get]]` internal method of *O* with the argument `"length"`.
3. Let *len* be `ToUint32(lenValue)`.
4. If `IsCallable(callbackfn)` is **false**, throw a **TypeError** exception.
5. If *thisArg* was supplied, let *T* be *thisArg*; else let *T* be **undefined**.
6. Let *k* be 0.
7. Repeat, while $k < len$
 - a. Let *Pk* be `ToString(k)`.
 - b. Let *kPresent* be the result of calling the `[[HasProperty]]` internal method of *O* with argument *Pk*.
 - c. If *kPresent* is **true**, then
 - i. Let *kValue* be the result of calling the `[[Get]]` internal method of *O* with argument *Pk*.
 - ii. Let *testResult* be the result of calling the `[[Call]]` internal method of *callbackfn* with *T* as the **this** value and argument list containing *kValue*, *k*, and *O*.
 - iii. If `ToBoolean(testResult)` is **false**, return **false**.
 - d. Increase *k* by 1.

Deleted: Call the `[[Get]]` method of *E* with the argument `"length"`.

Deleted: Call `ToUint32(Result(2))`.

Deleted: If `Result(3)` is 0 go to step 18.

Deleted: *Ca*

Deleted: If `ToInt32(fromIndex)` (if *fromIndex* is undefined this step produces the same values as `Result(3)`).

Deleted: `<#>Let n be Result(5).`

Deleted: is greater than or equal to

Deleted: `Result(3)`

Deleted: `Result(3)`

Deleted: -

Deleted: , and go to step 11.

Deleted: If

Deleted: is greater than or equal to 0, let *k* be *n*, and go to step 11.

Deleted: `Result(3)`

Deleted: If *k* is less than 0 go to step 18.

Deleted: Call `ToString(k)`.
Call the `[[Get]]` method of *E* with the argument `Result(11)`.

Deleted: Perform the comparison `SameValue(searchElement, Result(12))`.

Deleted: `<#>If Result(13) is false go to step 16.`
`<#>Return k.`

Deleted: `<#>If k is greater than or equal to 0 go to step 11.`

8. Return true.

NOTE

The every function is intentionally generic; it does not require that its this value be an Array object. Therefore it can be transferred to other kinds of objects for use as a method. Whether the every function can be applied successfully to a host object is implementation-dependent.

15.4.4.17 Array.prototype.some (callbackfn [, thisArg])

callbackfn should be a function that accepts three arguments and returns the boolean value true or false. some calls the callback, as a function, once for each element present in the array, in ascending order, until it finds one where callbackfn returns true. If such an element is found, some immediately returns true. Otherwise, some returns false. callbackfn is called only for indexes of the array which have assigned values; it is not called for indexes which have been deleted or which have never been assigned values.

If a thisArg parameter is provided, it will be used as the this value for each invocation of the callback. If it is not provided, undefined is used instead.

callbackfn is called with three arguments: the value of the element, the index of the element, and the Array object being traversed.

some does not mutate the array on which it is called.

The range of elements processed by some is set before the first call to callbackfn. Elements that are appended to the array after the call to some begins will not be visited by callbackfn. If an existing, unvisited element of the array is changed by callbackfn, their value as passed to callbackfn will be the value at the time that some visits them; elements that are deleted are not visited.

When the some method is called with one or two arguments, the following steps are taken:

1. Let O be this object.
2. Let lenValue be the result of calling the [[Get]] internal method of O with the argument "length".
3. Let len be ToUint32(lenValue).
4. If IsCallable(callbackfn) is false, throw a TypeError exception.
5. If thisArg was supplied, let T be thisArg; else let T be undefined.
6. Let k be 0.
7. Repeat, while k < len
 - a. Let Pk be ToString(k).
 - b. Let kPresent be the result of calling the [[HasProperty]] internal method of O with argument Pk.
 - c. If kPresent is true, then
 - i. Let kValue be the result of calling the [[Get]] internal method of O with argument Pk.
 - ii. Let testResult be the result of calling the [[Call]] internal method of callbackfn with T as the this value and argument list containing kValue, k, and O.
 - iii. If ToBoolean(testResult) is true, return true.
 - d. Increase k by 1.
8. Return false.

NOTE

The some function is intentionally generic; it does not require that its this value be an Array object. Therefore it can be transferred to other kinds of objects for use as a method. Whether the some function can be applied successfully to a host object is implementation-dependent.

15.4.4.18 Array.prototype.forEach (callbackfn [, thisArg])

callbackfn should be a function that accepts three arguments. forEach calls the provided callback, as a function, once for each element present in the array, in ascending order. callbackfn is called only for indexes of the array which have assigned values; it is not called for indexes which have been deleted or which have never been assigned values.

If a thisArg parameter is provided, it will be used as the this value for each invocation of the callback. If it is not provided, undefined is used instead.

Deleted:

```

<#>Let E be this object.
<#>Call the [[Get]] method of E with the
argument "length".
<#>Call ToUint32(Result(2)).
<#>If Result(3) is 0 go to step 1817.
<#>If Type(callbackfn) is not Object, throw a
TypeError exception.
<#>If IsCallable(callbackfn) is false, throw a
TypeError exception.
<#>Let O be thisArg.
<#>Let k be 0.
<#>Call ToString(k).
<#>If E does not have a property named by
Result(98), go to step 1615.
<#>Call the [[Get]] method of E with
argument Result(98).
<#>Call the [[Call]] method of callbackfn
with O as the this value and arguments
Result(1110), k, and E.
<#>Call ToBoolean(Result(1211)).
<#>If Result(1312) is true go to step 1615.
<#>Return false.
<#>Increase k by 1.
<#>If k is less than Result(3) go to step 98.
<#>Return true.

```

Deleted:

```

<#>Let E be this object.
<#>Call the [[Get]] method of E with the
argument "length".
<#>Call ToUint32(Result(2)).
<#>If Result(3) is 0 go to step 1817.
<#>If Type(callbackfn) is not Object, throw a
TypeError exception.
<#>If IsCallable(callbackfn) is false, throw a
TypeError exception.
<#>Let O be thisArg.
<#>Let k be 0.
<#>Call ToString(k).
<#>If E does not have a property named by
Result(98), go to step 1615.
<#>Call the [[Get]] method of E with
argument Result(98).
<#>Call the [[Call]] method of callbackfn
with O as the this value and arguments
Result(1110), k, and E.
<#>Call ToBoolean(Result(1211)).
<#>If Result(1312) is false go to step 1615.
<#>Return true.
<#>Increase k by 1.
<#>If k is less than Result(3) go to step 98.
<#>Return false.

```

callbackfn is called with three arguments: the value of the element, the index of the element, and the Array object being traversed.

forEach does not mutate the array on which it is called.

The range of elements processed by **forEach** is set before the first call to *callbackfn*. Elements which are appended to the array after the call to **forEach** begins will not be visited by *callbackfn*. If existing elements of the array are changed, or deleted, their value as passed to callback will be the value at the time **forEach** visits them; elements that are deleted are not visited.

When the **forEach** method is called with one or two arguments, the following steps are taken:

1. Let *O* be this object.
2. Let *lenValue* be the result of calling the **[[Get]]** internal method of *O* with the argument "length".
3. Let *len* be **ToUint32(lenValue)**.
4. If **IsCallable(callbackfn)** is false, throw a **TypeError** exception.
5. If *thisArg* was supplied, let *T* be *thisArg*; else let *T* be **undefined**.
6. Let *k* be 0.
7. Repeat, while *k* < *len*
 - a. Let *Pk* be **ToString(k)**.
 - b. Let *kPresent* be the result of calling the **[[HasProperty]]** internal method of *O* with argument *Pk*.
 - c. If *kPresent* is true, then
 - i. Let *kValue* be the result of calling the **[[Get]]** internal method of *O* with argument *Pk*.
 - ii. Call the **[[Call]]** internal method of *callbackfn* with *T* as the **this** value and argument list containing *kValue*, *k*, and *O*.
 - d. Increase *k* by 1.
8. Return.

NOTE

The **forEach** function is intentionally generic; it does not require that its **this** value be an Array object. Therefore it can be transferred to other kinds of objects for use as a method. Whether the **forEach** function can be applied successfully to a host object is implementation-dependent.

15.4.4.19 Array.prototype.map (callbackfn [, thisArg])

callbackfn should be a function that accepts three arguments. **map** calls the provided callback, as a function, once for each element in the array, in ascending order, and constructs a new array from the results. *callbackfn* is called only for indexes of the array which have assigned values; it is not called for indexes which have been deleted or which have never been assigned values.

If a *thisArg* parameter is provided, it will be used as the **this** value for each invocation of the callback. If it is not provided, **undefined** is used instead.

callbackfn is called with three arguments: the value of the element, the index of the element, and the Array object being traversed.

map does not mutate the array on which it is called.

The range of elements processed by **map** is set before the first call to *callbackfn*. Elements which are appended to the array after the call to **map** begins will not be visited by *callbackfn*. If existing elements of the array are changed, or deleted, their value as passed to *callbackfn* will be the value at the time **map** visits them; elements that are deleted are not visited.

When the **map** method is called with one or two arguments, the following steps are taken:

1. Let *O* be this object.
2. Let *lenValue* be the result of calling the **[[Get]]** internal method of *O* with the argument "length".
3. Let *len* be **ToUint32(lenValue)**.
4. If **IsCallable(callbackfn)** is false, throw a **TypeError** exception.
5. If *thisArg* was supplied, let *T* be *thisArg*; else let *T* be **undefined**.

Deleted: E
Deleted: Call
Deleted: E
Deleted: Call
Deleted: Result(2)
Deleted: <#-If Result(3) is 0 go to step 14.¶
Deleted: If Type(callbackfn) is not Object, throw a TypeError exception.¶
Deleted: <#-If IsCallable(callbackfn) is false, throw a TypeError exception.¶
Deleted: L
Deleted: O
Deleted: Call
Deleted: E
Deleted: does not have a property named by Result(98), go to step 1312.
Deleted: Call
Deleted: E
Deleted: Result(98)
Deleted: O
Deleted: s
Deleted: Result(1110)
Deleted: E
Deleted: <#-If k is less than Result(3) go to step 98.¶

6. Let *A* be a new array created as if by the expression `new Array(len)` where `Array` is the standard built-in constructor with that name and *len* is the value of *len*.
7. Let *k* be 0.
8. Repeat, while *k* < *len*
 - a. Let *Pk* be `ToString(k)`.
 - b. Let *kPresent* be the result of calling the `[[HasProperty]]` internal method of *O* with argument *Pk*.
 - c. If *kPresent* is **true**, then
 - i. Let *kValue* be the result of calling the `[[Get]]` internal method of *O* with argument *Pk*.
 - ii. Let *mappedValue* be the result of calling the `[[Call]]` internal method of *callbackfn* with *T* as the **this** value and argument list containing *kValue*, *k*, and *O*.
 - iii. Call the `[[Put]]` internal method of *A* with arguments *Pk* and *mappedValue*.
 - d. Increase *k* by 1.
9. Return *A*.

NOTE

The `map` function is intentionally generic; it does not require that its **this** value be an Array object. Therefore it can be transferred to other kinds of objects for use as a method. Whether the `map` function can be applied successfully to a host object is implementation-dependent.

15.4.4.20 Array.prototype.filter (callbackfn [, thisArg])

callbackfn should be a function that accepts three arguments and returns the boolean value **true** or **false**. `filter` calls the provided callback, as a function, once for each element in the array, in ascending order, and constructs a new array of all the values for which *callbackfn* returns **true**. *callbackfn* is called only for indexes of the array which have assigned values; it is not called for indexes which have been deleted or which have never been assigned values.

If a *thisArg* parameter is provided, it will be used as the **this** value for each invocation of the callback. If it is not provided, **undefined** is used instead.

callbackfn is called with three arguments: the value of the element, the index of the element, and the Array object being traversed.

`filter` does not mutate the array on which it is called.

The range of elements processed by `filter` is set before the first call to *callbackfn*. Elements which are appended to the array after the call to `filter` begins will not be visited by *callbackfn*. If existing elements of the array are changed, or deleted, their value as passed to *callbackfn* will be the value at the time `filter` visits them; elements that are deleted are not visited.

When the `filter` method is called with one or two arguments, the following steps are taken:

1. Let *O* be this object.
2. Let *lenValue* be the result of calling the `[[Get]]` internal method of *O* with the argument **"length"**.
3. Let *len* be `ToUint32(lenValue)`.
4. If `IsCallable(callbackfn)` is **false**, throw a **TypeError** exception.
5. If *thisArg* was supplied, let *T* be *thisArg*; else let *T* be **undefined**.
6. Let *A* be a new array created as if by the expression `new Array()` where `Array` is the standard built-in constructor with that name.
7. Let *k* be 0.
8. Let *to* be 0.
9. Repeat, while *k* < *len*
 - a. Let *Pk* be `ToString(k)`.
 - b. Let *kPresent* be the result of calling the `[[HasProperty]]` internal method of *O* with argument *Pk*.
 - c. If *kPresent* is **true**, then
 - i. Let *kValue* be the result of calling the `[[Get]]` internal method of *O* with argument *Pk*.
 - ii. Let *selected* be the result of calling the `[[Call]]` internal method of *callbackfn* with *T* as the **this** value and argument list containing *kValue*, *k*, and *O*.
 - iii. If `ToBoolean(selected)` is **true**, then

Deleted:

```
<#>Let A be a new array created as if by the
expression new Array () where Array is
the standard built-in constructor with that
name.
<#>Let n be 0.
<#>Let E be this object.
<#>Call the [[Get]] method of E with the
argument "length".
<#>Call ToUint32(Result(43)).
<#>If Result(54) is 0 go to step 2016.
<#>If Type(callbackfn) is not Object, throw a
TypeError exception.
<#>If IsCallable(callbackfn) is false, throw a
TypeError exception.
<#>Let O be thisArg.
<#>Let k be 0.
<#>Call ToString(k).
<#>If E does not have a property named by
Result(119), go to step 1914.
<#>Call the [[Get]] method of E with
argument Result(1110).
<#>Call the [[Call]] method of callbackfn
with O as the this value and arguments
Result(1311), k, and E.
<#>Call ToString(n).
<#>Call the [[Put]] method of A with the
argument Result(149) and Result(1512).
<#>Increase n by 1.
<#>Increase k by 1.
<#>If k is less than Result(54) go to step 119.
<#>Return A.
```

1. Call the [[Put]] internal method of *A* with arguments ToString(*to*) and *kValue*.
 2. Increase *to* by 1.
 - d. Increase *k* by 1.
10. Return *A*.

NOTE

The **filter** function is intentionally generic; it does not require that its **this** value be an Array object. Therefore it can be transferred to other kinds of objects for use as a method. Whether the **filter** function can be applied successfully to a host object is implementation-dependent.

15.4.4.21 Array.prototype.reduce (callbackfn [, initialValue])

callbackfn should be a function that takes four arguments. **reduce** calls the callback, as a function, once for each element present in the array, in ascending order.

callbackfn is called with four arguments: the previousValue (or value from the previous call to *callbackfn*), the currentValue (value of the current element), the currentIndex, and the Array object being traversed. The first time that callback is called, the previousValue and currentValue can be one of two values. If an *initialValue* was provided in the call to **reduce**, then previousValue will be equal to *initialValue* and currentValue will be equal to the first value in the array. If no *initialValue* was provided, then previousValue will be equal to the first value in the array and currentValue will be equal to the second.

reduce does not mutate the array on which it is called.

The range of elements processed by **reduce** is set before the first call to *callbackfn*. Elements that are appended to the array after the call to **reduce** begins will not be visited by *callbackfn*. If an existing, unvisited element is changed by *callbackfn*, their value as passed to *callbackfn* will be the value at the time **reduce** visits them; elements that are deleted are not visited.

When the **reduce** method is called with one or two arguments, the following steps are taken:

1. Let *O* be this object.
2. Let *lenValue* be the result of calling the [[Get]] internal method of *O* with the argument "**length**".
3. Let *len* be ToUint32(*lenValue*).
4. If IsCallable(*callbackfn*) is false, throw a **TypeError** exception.
5. If *len* is 0 and *initialValue* is not present, throw a **TypeError** exception.
6. Let *k* be 0.
7. If *initialValue* is present, then
 - a. Set *accumulator* to *initialValue*.
8. Else, *initialValue* is not present
 - b. Let *kPresent* be false.
 - a. Repeat, while *kPresent* is false and *k* < *len*
 - i. Let *Pk* be ToString(*k*).
 - ii. Let *kPresent* be the result of calling the [[HasProperty]] internal method of *O* with argument *Pk*.
 - iii. If *kPresent* is true, then
 1. Let *accumulator* be the result of calling the [[Get]] internal method of *O* with argument *Pk*.
 - iv. Increase *k* by 1.
 - c. If *kPresent* is false, throw a **TypeError** exception.
9. Repeat, while *k* < *len*
 - a. Let *Pk* be ToString(*k*).
 - b. Let *kPresent* be the result of calling the [[HasProperty]] internal method of *O* with argument *Pk*.
 - c. If *kPresent* is true, then
 - i. Let *kValue* be the result of calling the [[Get]] internal method of *O* with argument *Pk*.
 - ii. Let *accumulator* be the result of calling the [[Call]] internal method of *callbackfn* with null as the **this** value and argument list containing *accumulator*, *kValue*, *k*, and *O*.
 - d. Increase *k* by 1.
10. Return *accumulator*.

Deleted:

```
<#>Let A be a new array created as if by the
expression new Array () where Array is the
standard built-in constructor with that name.¶
<#>Let n be 0.¶
<#>Let E be this object.¶
<#>Call the [[Get]] method of E with the argument
"length".¶
<#>Call ToUint32(Result(4)).¶
<#>If Result(5) is 0 go to step 2221.¶
<#>If Type(callbackfn) is not Object, throw a
TypeError exception.¶
<#>If IsCallable(callbackfn) is false, throw a
TypeError exception.¶
<#>Let O this this.Arg.¶
<#>Let k be 0.¶
<#>Call ToString(k).¶
<#>If E does not have a property named by
Result(1110), go to step 2019.¶
<#>Call the [[Get]] method of E with argument
Result(1110).¶
<#>Call the [[Call]] method of callbackfn with O as
the this value and arguments Result(1312), k, and E.¶
<#>Call ToBoolean(Result(1413)).¶
<#>If Result(1514) is false go to step 2019.¶
<#>Call ToString(n).¶
<#>Call the [[Put]] method of A with the argument
Result(1316) and Result(1712).¶
<#>Increase n by 1.¶
<#>Increase k by 1.¶
<#>If k is less than Result(5) go to step 1110.¶
<#>Return A.¶
```

NOTE

*The **reduce** function is intentionally generic; it does not require that its **this** value be an Array object. Therefore it can be transferred to other kinds of objects for use as a method. Whether the **reduce** function can be applied successfully to a host object is implementation-dependent.*

15.4.4.22 Array.prototype.reduceRight (callbackfn [, initialValue])

*callbackfn should be a function that takes four arguments. **reduceRight** calls the callback, as a function, once for each element present in the array, in descending order.*

*callbackfn is called with four arguments: the previousValue (or value from the previous call to callbackfn), the currentValue (value of the current element), the currentIndex, and the Array object being traversed. The first time the function is called, the previousValue and currentValue can be one of two values. If an initialValue was provided in the call to **reduceRight**, then previousValue will be equal to initialValue and currentValue will be equal to the last value in the array. If no initialValue was provided, then previousValue will be equal to the last value in the array and currentValue will be equal to the second-to-last value.*

***reduceRight** does not mutate the array on which it is called.*

*The range of elements processed by **reduceRight** is set before the first call to callbackfn. Elements that are appended to the array after the call to **reduceRight** begins will not be visited by callbackfn. If an existing, unvisited element is changed by callbackfn, their value as passed to callbackfn will be the value at the time **reduceRight** visits them; elements that are deleted are not visited.*

*When the **reduceRight** method is called with one or two arguments, the following steps are taken:*

1. Let *O* be this object.
 2. Let *lenValue* be the result of calling the `[[Get]]` internal method of *O* with the argument `"length"`.
 3. Let *len* be `ToUint32(lenValue)`.
 4. If `IsCallable(callbackfn)` is **false**, throw a **TypeError** exception.
 5. If *len* is 0 and *initialValue* is not present, throw a **TypeError** exception.
 6. Let *k* be *len* - 1.
 7. If *initialValue* is present, then
 - a. Set *accumulator* to *initialValue*.
 8. Else, *initialValue* is not present
 - a. Let *kPresent* be **false**.
 - b. Repeat, while *kPresent* is **false** and *k* > 0
 - i. Let *Pk* be `ToString(k)`.
 - ii. Let *kPresent* be the result of calling the `[[HasProperty]]` internal method of *O* with argument *Pk*.
 - iii. If *kPresent* is **true**, then
 1. Let *accumulator* be the result of calling the `[[Get]]` internal method of *O* with argument *Pk*.
 - iv. Decrease *k* by 1.
 - c. If *kPresent* is **false**, throw a **TypeError** exception.
9. Repeat, while *k* > 0
 - a. Let *Pk* be `ToString(k)`.
 - b. Let *kPresent* be the result of calling the `[[HasProperty]]` internal method of *O* with argument *Pk*.
 - c. If *kPresent* is **true**, then
 - i. Let *kValue* be the result of calling the `[[Get]]` internal method of *O* with argument *Pk*.
 - ii. Let *accumulator* be the result of calling the `[[Call]]` internal method of *callbackfn* with **null** as the **this** value and argument list containing *accumulator*, *kValue*, *k*, and *O*.
 - d. Decrease *k* by 1.
10. Return *accumulator*.

NOTE

*The **reduceRight** function is intentionally generic; it does not require that its **this** value be an Array object. Therefore it can be transferred to other kinds of objects for use as a method. Whether*

```

Deleted:
<#>Let E be this object.
<#>Call the [[Get]] method on E with
argument "length".
<#>Call ToUint32(Result(2)).
<#>If Type(callbackfn) is not Object, throw a
TypeError exception.
<#>If IsCallable(callbackfn) is false, throw a
TypeError exception.
<#>If Result(3) is 0 and initialValue is not
supplied throw a TypeError exception.
<#>Let k be 0.
<#>If initialValue is supplied let P be
initialValue and go to step 1716.
<#>Call ToString(k).
<#>If E does not have a property named by
Result(98), go to step 1413.
<#>Call the [[Get]] method on E with the
argument Result(98).
<#>Increase k by 1.
<#>Let P be Result(1110) and go to step
1716.
<#>Increase k by 1.
<#>If k < Result(3) go to step 98.
<#>Throw a TypeError exception.
<#>Call ToString(k).
<#>If E does not have a property named by
Result(1716), go to step 2221.
<#>Call the [[Get]] method of E with the
argument Result(1716).
<#>Call the [[Call]] method on callbackfn
with null as the this value and arguments P,
Result(1918), k, E.
<#>Let P be Result(2019).
<#>Increase k by 1.
<#>If k < Result(3) go to step 1716.
<#>Return P.

```

```

Deleted:
<#>Let E be this object.
<#>Call the [[Get]] method on E with
argument "length".
<#>Call ToUint32(Result(2)).
<#>If Type(callbackfn) is not Object throw a
TypeError exception.
<#>If IsCallable(callbackfn) is false, throw a
TypeError exception.
<#>If Result(3) is 0 and initialValue is not
supplied throw a TypeError exception.
<#>Let k be Result(3) - 1.
<#>If initialValue is supplied let P be
initialValue and go to step 1716.
<#>Call ToString(k).
<#>If E does not have a property named by
Result(98), go to step 1413.
<#>Call the [[Get]] method on E with the
argument Result(98).
<#>Decrease k by 1.
<#>Let P be Result(1110) and go to step
1716.
<#>Decrease k by 1.
<#>If k is greater than or equal to 0 go to step
98.
<#>Throw a TypeError exception.
<#>Call ToString(k).
<#>If E does not have a property named by
Result(1716), go to step 2221.
<#>Call the [[Get]] method of E with the
argument Result(1716).
<#>Call the [[Call]] method on callbackfn
with null as the this value and arguments P,
Result(1918), k, E.
<#>Let P be Result(2019).
<#>Decrease k by 1.

```

the `reduceRight` function can be applied successfully to a host object is implementation-dependent.

15.4.5 Properties of Array Instances

Array instances inherit properties from the Array prototype object, and their `[[Class]]` property value is `"Array"`, Array instances also have the following properties.

15.4.5.1 `[[DefineOwnProperty]]` (`P`, `Desc`, `Throw`)

Array objects use a variation of the `[[DefineOwnProperty]]` method used for other native ECMAScript objects (8.12.10).

Assume *A* is an Array object, *Desc* is a Property Descriptor, and *Throw* is a boolean flag.

In the following algorithm, the term "Reject" means "If *Throw* is true, then throw a `TypeError` exception, otherwise return false."

When the `[[DefineOwnProperty]]` method of *A* is called with property *P*, Property Descriptor *Desc*, and Boolean flag *Throw*, the following steps are taken:

1. Let *oldLenDesc* be the result of calling the `[[GetOwnProperty]]` internal method of *A* passing `"length"` as the argument. The result will never be `undefined` or an accessor descriptor because Array objects are created with a length data property that cannot be deleted or reconfigured.
2. Let *oldLen* be *oldLenDesc*.[`[[Value]]`].
3. If *P* is `"length"`, then
 - a. If the `[[Value]]` field of *Desc* is present, then
 - i. Let *newLen* be `ToUint32(Desc.[[Value]])`.
 - ii. If *newLen* is not equal to `ToNumber(Desc.[[Value]])`, throw a `RangeError` exception.
 - iii. Set *Desc*.[`[[Value]]`] to *newLen*.
 - iv. Let *succeeded* be the result of calling the default `[[DefineOwnProperty]]` internal method (8.12.10) on *A* passing `"length"`, *Desc*, and `false` as arguments.
 - v. Reject if *succeeded* is false.
 - vi. While *newLen* < *oldLen* repeat,
 1. Set *oldLen* to *oldLen* - 1.
 2. Let *cantDelete* be the result of calling the `[[Delete]]` internal method of *A* passing `Tostring(oldLen)` and `false` as arguments.
 3. If *cantDelete* is true, then
 - a. Set *Desc*.[`[[Value]]`] to *oldLen* + 1.
 - b. Call the default `[[DefineOwnProperty]]` internal method (8.12.10) on *A* passing `"length"`, *Desc*, and `false` as arguments.
 - c. Return true.
 - vii. Return true.
 - b. Let *succeeded* be the result of calling the default `[[DefineOwnProperty]]` internal method (8.12.10) on *A* passing `"length"`, *Desc*, and *Throw* as arguments.
 - c. Return *succeeded*.
4. Else if *P* is an array index, then
 - a. Reject if `IsAccessorDescriptor(Desc)` is true.
 - b. Let *index* be `ToUint32(P)`.
 - c. Reject if *index* ≥ *oldLen* and *oldLenDesc*.[`[[Writable]]`] is false.
 - d. Let *succeeded* be the result of calling the default `[[DefineOwnProperty]]` internal method (8.12.10) on *A* passing *P*, *Desc*, and `false` as arguments.
 - e. Reject if *succeeded* is false.
 - f. If *index* ≥ *oldLen*
 - i. Set *oldLenDesc*.[`[[Value]]`] to *index* + 1.
 - ii. Calling the default `[[DefineOwnProperty]]` internal method (8.12.10) on *A* passing `"length"`, *oldLenDesc*, and `false` as arguments.
 - g. Return true.
5. Return the result of calling the default `[[DefineOwnProperty]]` internal method (8.12.10) on *A* passing *P*, *Desc*, and *Throw* as arguments.

- Deleted: ,
- Deleted: , and they have the internal property `[[IsArray]]` value true
- Deleted: also
- Deleted: and
- Deleted: `ThrowingPut`
- Deleted: `V`
- Deleted: `ThrowingPut`
- Deleted: 8.6.2.210
- Deleted: 5
- Deleted: and
- Deleted: *P*
- Deleted: string
- Deleted: `ThrowingPut`
- Deleted: and
- Deleted: value
- Deleted: *V*

Deleted: Call

Deleted: ni

15.4.5.2 length

The **length** property of this Array object is a data property whose value is always numerically greater than the name of every deletable property whose name is an array index.

The **length** property initially has the attributes { [[Writable]]: true, [[Enumerable]]: false, [[Configurable]]: false }.

```
Deleted: <#>Call the [[CanPut]] method of
A with name P.¶
<#>If Result(1) is false, return¶
<#>If Throw is true, throw a TypeError
exception.¶
<#>Else return.¶
<#>If A doesn't have a property with name P,
go to step 7.¶
<#>If P is "length", go to step 12.¶
<#>Set the value of property P of A to V.¶
<#>Go to step 8.¶
<#>Create a property with name P, set its
value to V and give it empty attributes.¶
<#>If P is not an array index, return.¶
<#>If ToUint32(P) is less than the value of
the length property of A, then return.¶
<#>Change (or set) the value of the length
property of A to ToUint32(P)+1.¶
<#>Return.¶
<#>Compute ToUint32(V).¶
<#>If Result(12) is not equal to
ToNumber(V), throw a RangeError exception.¶
<#>For every integer k that is less than the
value of the length property of A but not less
than Result(12), if A itself has an own
property (not an non-inherited property)
named ToString(k), then delete that property.¶
<#>Set the value of property P of A to
Result(12).¶
<#>Return.¶
```

Deleted: DontEnum, DontDelete

Deleted: DontEnum, DontDelete, ReadOnly

Deleted: code point

Deleted: 15.2.3.1

15.5 String Objects

15.5.1 The String Constructor Called as a Function

When **String** is called as a function rather than as a constructor, it performs a type conversion.

15.5.1.1 String ([value])

Returns a string value (not a String object) computed by ToString(value). If value is not supplied, the empty string "" is returned.

15.5.2 The String Constructor

When **String** is called as part of a **new** expression, it is a constructor: it initialises the newly created object.

15.5.2.1 new String ([value])

The [[Prototype]] property of the newly constructed object is set to the original String prototype object, the one that is the initial value of **String.prototype** (15.5.3.1).

The [[Class]] property of the newly constructed object is set to **"String"**. The [[Extensible]] property of the newly constructed object is set to true.

The [[PrimitiveValue]] property of the newly constructed object is set to ToString(value), or to the empty string if value is not supplied.

15.5.3 Properties of the String Constructor

The value of the internal [[Prototype]] property of the String constructor is the Function prototype object (15.3.4).

Besides the internal properties and the **length** property (whose value is 1), the String constructor has the following properties:

15.5.3.1 String.prototype

The initial value of **String.prototype** is the String prototype object (15.5.4).

This property has the attributes { [[Writable]]: false, [[Enumerable]]: false, [[Configurable]]: false }.

15.5.3.2 String.fromCharCode ([char0 [, char1 [, ...]]])

Returns a string value containing as many characters as the number of arguments. Each argument specifies one character of the resulting string, with the first argument specifying the first character, and so on, from left to right. An argument is converted to a character by applying the operation ToUint16 (9.7) and regarding the resulting 16-bit integer as the code unit value of a character. If no arguments are supplied, the result is the empty string.

The **length** property of the **fromCharCode** function is 1.

15.5.4 Properties of the String Prototype Object

The String prototype object is itself a String object (its [[Class]] is **"String"**) whose value is an empty string.

The value of the internal [[Prototype]] property of the String prototype object is the standard built-in Object prototype object (15.2.4).

15.5.4.1 String.prototype.constructor

The initial value of **String.prototype.constructor** is the built-in **String** constructor.

15.5.4.2 String.prototype.toString ()

Returns this string value. (Note that, for a String object, the **toString** method happens to return the same thing as the **valueOf** method.)

The `toString` function is not generic; it throws a `TypeError` exception if its `this` value is not [String](#) or a `String` object. Therefore, it cannot be transferred to other kinds of objects for use as a method.

15.5.4.3 `String.prototype.valueOf ()`

Returns this string value.

The `valueOf` function is not generic; it throws a `TypeError` exception if its `this` value is not a [String](#) or `String` object. Therefore, it cannot be transferred to other kinds of objects for use as a method.

15.5.4.4 `String.prototype.charAt (pos)`

Returns a string containing the character at position `pos` in the string resulting from converting this object to a string. If there is no character at that position, the result is the empty string. The result is a string value, not a `String` object.

If `pos` is a value of `Number` type that is an integer, then the result of `x.charAt(pos)` is equal to the result of `x.substring(pos, pos+1)`.

When the `charAt` method is called with one argument `pos`, the following steps are taken:

1. Let `S` be the result of calling `ToString`, giving it the `this` value as its argument.
2. Let `position` be `ToInteger(pos)`.
3. Let `size` be the number of characters in `S`.
4. If `position < 0` or `position > size`, return the empty string.
5. Return a string of length 1, containing one character from `S` namely the character at position `position`, where the first (leftmost) character in `S` is considered to be at position 0, the next one at position 1, and so on.

NOTE

The `charAt` function is intentionally generic; it does not require that its `this` value be a `String` object. Therefore, it can be transferred to other kinds of objects for use as a method.

15.5.4.5 `String.prototype.charCodeAt (pos)`

Returns a number (a nonnegative integer less than 2^{16}) representing the `code unit` value of the character at position `pos` in the string resulting from converting this object to a string. If there is no character at that position, the result is `NaN`.

When the `charCodeAt` method is called with one argument `pos`, the following steps are taken:

1. Let `S` be the result of calling `ToString`, giving it the `this` value as its argument.
2. Let `position` be `ToInteger(pos)`.
3. Let `size` be the number of characters in `S`.
4. If `position < 0` or `position > size`, return `NaN`.
5. Return a value of `Number` type, whose value is the `code unit` value of the character at position `position` in the string `S`, where the first (leftmost) character in `S` is considered to be at position 0, the next one at position 1, and so on.

NOTE

The `charCodeAt` function is intentionally generic; it does not require that its `this` value be a `String` object. Therefore it can be transferred to other kinds of objects for use as a method.

15.5.4.6 `String.prototype.concat ([string1 [, string2 [, ...]]])`

When the `concat` method is called with zero or more arguments `string1`, `string2`, etc., it returns a string consisting of the characters of this object (converted to a string) followed by the characters of each of `string1`, `string2`, etc. (where each argument is converted to a string). The result is a string value, not a `String` object. The following steps are taken:

1. Let `S` be the result of calling `ToString`, giving it the `this` value as its argument.
2. Let `args` be an internal list that is copy of the argument list passed to this function.
3. Let `R` be `S`.
4. Repeat, while `args` is not empty
Remove the first element from `args` and let `next` be the value of that element.

- Deleted: Call
- Deleted: Call
- Deleted: Compute
- Deleted: Result(1)
- Deleted: Result(2)
- Deleted: is less than
- Deleted: is not less than
- Deleted: Result(3)
- Deleted: Result(1)
- Deleted: Result(2)
- Deleted: Result(1)
- Deleted: code point

- Deleted: Call
- Deleted: Call
- Deleted: Compute the number of characters in Result(1).
- Deleted: Result
- Deleted: (2) is less than 0 or is not less than Result(3)
- Deleted: code point
- Deleted: Result(2)
- Deleted: Result(1)
- Deleted: Result(1)

- Deleted: Call
- Deleted: Result(1)
- Deleted: Get the next argument in the argument list; if there are no more arguments, go to step 7.

- Let R be the string value consisting of the characters in the previous value of R followed by the characters of `Tostring(next)`.
- Return R .

Deleted: <#>Call ToString(Result(3)).¶

Deleted: Result(4)

Deleted: <#>Go to step 3.¶

The **length** property of the **concat** method is **1**.

NOTE

The **concat** function is intentionally generic; it does not require that its **this** value be a *String* object. Therefore it can be transferred to other kinds of objects for use as a method.

15.5.4.7 **String.prototype.indexOf** (*searchString*, *position*)

If *searchString* appears as a substring of the result of converting this object to a string, at one or more positions that are greater than or equal to *position*, then the index of the smallest such position is returned; otherwise, **-1** is returned. If *position* is **undefined**, **0** is assumed, so as to search all of the string.

The **indexOf** method takes two arguments, *searchString* and *position*, and performs the following steps:

- Call `ToString`, giving it the **this** value as its argument.
- Call `ToString(searchString)`.
- Call `ToInteger(position)`. (If *position* is **undefined**, this step produces the value **0**).
- Compute the number of characters in `Result(1)`.
- Compute $\min(\max(\text{Result}(3), 0), \text{Result}(4))$.
- Compute the number of characters in the string that is `Result(2)`.
- Compute the smallest possible integer k not smaller than `Result(5)` such that $k + \text{Result}(6)$ is not greater than `Result(4)`, and for all nonnegative integers j less than `Result(6)`, the character at position $k+j$ of `Result(1)` is the same as the character at position j of `Result(2)`; but if there is no such integer k , then compute the value **-1**.
- Return `Result(7)`.

The **length** property of the **indexOf** method is **1**.

NOTE

The **indexOf** function is intentionally generic; it does not require that its **this** value be a *String* object. Therefore, it can be transferred to other kinds of objects for use as a method.

15.5.4.8 **String.prototype.lastIndexOf** (*searchString*, *position*)

If *searchString* appears as a substring of the result of converting this object to a string at one or more positions that are smaller than or equal to *position*, then the index of the greatest such position is returned; otherwise, **-1** is returned. If *position* is **undefined**, the length of the string value is assumed, so as to search all of the string.

The **lastIndexOf** method takes two arguments, *searchString* and *position*, and performs the following steps:

- Call `ToString`, giving it the **this** value as its argument.
- Call `ToString(searchString)`.
- Call `ToNumber(position)`. (If *position* is **undefined**, this step produces the value **NaN**).
- If `Result(3)` is **NaN**, use $+\infty$; otherwise, call `ToInteger(Result(3))`.
- Compute the number of characters in `Result(1)`.
- Compute $\min(\max(\text{Result}(4), 0), \text{Result}(5))$.
- Compute the number of characters in the string that is `Result(2)`.
- Compute the largest possible nonnegative integer k not larger than `Result(6)` such that $k + \text{Result}(7)$ is not greater than `Result(5)`, and for all nonnegative integers j less than `Result(7)`, the character at position $k+j$ of `Result(1)` is the same as the character at position j of `Result(2)`; but if there is no such integer k , then compute the value **-1**.
- Return `Result(8)`.

The **length** property of the **lastIndexOf** method is **1**.

NOTE

The `lastIndexOf` function is intentionally generic; it does not require that its `this` value be a `String` object. Therefore, it can be transferred to other kinds of objects for use as a method.

15.5.4.9 `String.prototype.localeCompare` (`that`)

When the `localeCompare` method is called with one argument `that`, it returns a number other than `NaN` that represents the result of a locale-sensitive string comparison of this object (converted to a string) with `that` (converted to a string). The two strings are compared in an implementation-defined fashion. The result is intended to order strings in the sort order specified by the system default locale, and will be negative, zero, or positive, depending on whether `this` comes before `that` in the sort order, the strings are equal, or `this` comes after `that` in the sort order, respectively.

The `localeCompare` method, if considered as a function of two arguments `this` and `that`, is a consistent comparison function (as defined in 15.4.4.11) on the set of all strings. Furthermore, `localeCompare` returns `0` or `-0` when comparing two strings that are considered canonically equivalent by the Unicode standard.

The actual return values are left implementation-defined to permit implementers to encode additional information in the result value, but the function is required to define a total ordering on all strings and to return `0` when comparing two strings that are considered canonically equivalent by the Unicode standard.

NOTE 1

The `localeCompare` method itself is not directly suitable as an argument to `Array.prototype.sort` because the latter requires a function of two arguments.

NOTE 2

This function is intended to rely on whatever language-sensitive comparison functionality is available to the ECMAScript environment from the host environment, and to compare according to the rules of the host environment's current locale. It is strongly recommended that this function treat strings that are canonically equivalent according to the Unicode standard as identical (in other words, compare the strings as if they had both been converted to Normalised Form C or D first). It is also recommended that this function not honour Unicode compatibility equivalences or decompositions.

If no language-sensitive comparison at all is available from the host environment, this function may perform a bitwise comparison.

NOTE 3

The `localeCompare` function is intentionally generic; it does not require that its `this` value be a `String` object. Therefore, it can be transferred to other kinds of objects for use as a method.

NOTE 4

The second parameter to this function is likely to be used in a future version of this standard; it is recommended that implementations do not use this parameter position for anything else.

15.5.4.10 `String.prototype.match` (`regexp`)

If `regexp` is not an object whose `[[Class]]` property is `"RegExp"`, it is replaced with the result of the expression `new RegExp(regexp)`. Let `string` denote the result of converting the `this` value to a string. Then do one of the following:

If `regexp.global` is `false`: Return the result obtained by invoking `RegExp.prototype.exec` (see 15.10.6.2) on `regexp` with `string` as parameter.

If `regexp.global` is `true`: Set the `regexp.lastIndex` property to `0` and invoke `RegExp.prototype.exec` repeatedly until there is no match. If there is a match with an empty string (in other words, if the value of `regexp.lastIndex` is left unchanged), increment `regexp.lastIndex` by `1`. Let `n` be the number of matches. If `n=0`, then the value returned is `null`; otherwise, the value returned is an array with the `length` property set to `n` and properties `0` through `n-1` corresponding to the first elements of the results of all matching invocations of `RegExp.prototype.exec`,

NOTE

Deleted: The value returned is an array with the `length` property set to `n` and properties `0` through `n-1` corresponding to the first elements of the results of all matching invocations of `RegExp.prototype.exec`.

The **match** function is intentionally generic; it does not require that its **this** value be a *String* object. Therefore, it can be transferred to other kinds of objects for use as a method.

15.5.4.11 String.prototype.replace (searchValue, replaceValue)

Let *string* denote the result of converting the **this** value to a string.

If *searchValue* is a regular expression (an object whose `[[Class]]` property is `"RegExp"`), do the following: If *searchValue*.`global` is `false`, then search *string* for the first match of the regular expression *searchValue*. If *searchValue*.`global` is `true`, then search *string* for all matches of the regular expression *searchValue*. Do the search in the same manner as in `String.prototype.match`, including the update of *searchValue*.`lastIndex`. Let *m* be the number of left capturing parentheses in *searchValue* (*NcapturingParens* as specified in 15.10.2.1).

If *searchValue* is not a regular expression, let *searchString* be `ToString(searchValue)` and search *string* for the first occurrence of *searchString*. Let *m* be 0.

If *replaceValue* is a function, then for each matched substring, call the function with the following *m* + 3 arguments. Argument 1 is the substring that matched. If *searchValue* is a regular expression, the next *m* arguments are all of the captures in the `MatchResult` (see 15.10.2.1). Argument *m* + 2 is the offset within *string* where the match occurred, and argument *m* + 3 is *string*. The result is a string value derived from the original input by replacing each matched substring with the corresponding return value of the function call, converted to a string if need be.

Otherwise, let *newstring* denote the result of converting *replaceValue* to a string. The result is a string value derived from the original input string by replacing each matched substring with a string derived from *newstring* by replacing characters in *newstring* by replacement text as specified in the following table. These `$` replacements are done left-to-right, and, once such a replacement is performed, the new replacement text is not subject to further replacements. For example, `"$1,$2".replace(/(\$(\d))/g, "$$1-$1$2")` returns `"$1-$11,$1-$22"`. A `$` in *newstring* that does not match any of the forms below is left as is.

Characters	Replacement text
<code>\$\$</code>	<code>\$</code>
<code>\$&</code>	The matched substring.
<code>\$'</code>	The portion of <i>string</i> that precedes the matched substring.
<code>\$'</code>	The portion of <i>string</i> that follows the matched substring.
<code>\$n</code>	The <i>n</i> th capture, where <i>n</i> is a single digit 1-9 and <code>\$n</code> is not followed by a decimal digit. If $n \leq m$ and the <i>n</i> th capture is undefined , use the empty string instead. If $n > m$, the result is implementation-defined.
<code>\$nn</code>	The <i>nn</i> th capture, where <i>nn</i> is a two-digit decimal number 01-99. If $nn \leq m$ and the <i>nn</i> th capture is undefined , use the empty string instead. If $nn > m$, the result is implementation-defined.

NOTE

The **replace** function is intentionally generic; it does not require that its **this** value be a *String* object. Therefore, it can be transferred to other kinds of objects for use as a method.

15.5.4.12 String.prototype.search (regexp)

If *regexp* is not an object whose `[[Class]]` property is `"RegExp"`, it is replaced with the result of the expression `new RegExp(regexp)`. Let *string* denote the result of converting the **this** value to a string.

The value *string* is searched from its beginning for an occurrence of the regular expression pattern *regexp*. The result is a number indicating the offset within the string where the pattern matched, or `-1` if there was no match.

NOTE 1

This method ignores the **lastIndex** and **global** properties of *regexp*. The **lastIndex** property of *regexp* is left unchanged.

NOTE 2

The **search** function is intentionally generic; it does not require that its **this** value be a *String* object. Therefore, it can be transferred to other kinds of objects for use as a method.

15.5.4.13 String.prototype.slice (start, end)

The **slice** method takes two arguments, *start* and *end*, and returns a substring of the result of converting this object to a string, starting from character position *start* and running to, but not including, character position *end* (or through the end of the string if *end* is **undefined**). If *start* is negative, it is treated as (*sourceLength*+*start*) where *sourceLength* is the length of the string. If *end* is negative, it is treated as (*sourceLength*+*end*) where *sourceLength* is the length of the string. The result is a string value, not a *String* object. The following steps are taken:

1. Call *ToString*, giving it the **this** value as its argument.
2. Compute the number of characters in *Result*(1).
3. Call *ToInteger*(*start*).
4. If *end* is **undefined**, use *Result*(2); else use *ToInteger*(*end*).
5. If *Result*(3) is negative, use $\max(\text{Result}(2)+\text{Result}(3),0)$; else use $\min(\text{Result}(3),\text{Result}(2))$.
6. If *Result*(4) is negative, use $\max(\text{Result}(2)+\text{Result}(4),0)$; else use $\min(\text{Result}(4),\text{Result}(2))$.
7. Compute $\max(\text{Result}(6)-\text{Result}(5),0)$.
8. Return a string containing *Result*(7) consecutive characters from *Result*(1) beginning with the character at position *Result*(5).

The **length** property of the **slice** method is 2.

NOTE

The **slice** function is intentionally generic; it does not require that its **this** value be a *String* object. Therefore it can be transferred to other kinds of objects for use as a method.

15.5.4.14 String.prototype.split (separator, limit)

Returns an *Array* object into which substrings of the result of converting this object to a string have been stored. The substrings are determined by searching from left to right for occurrences of *separator*; these occurrences are not part of any substring in the returned array, but serve to divide up the string value. The value of *separator* may be a string of any length or it may be a *RegExp* object (i.e., an object whose *[[Class]]* property is "**RegExp**"; see 15.10).

The value of *separator* may be an empty string, an empty regular expression, or a regular expression that can match an empty string. In this case, *separator* does not match the empty substring at the beginning or end of the input string, nor does it match the empty substring at the end of the previous *separator* match. (For example, if *separator* is the empty string, the string is split up into individual characters; the length of the result array equals the length of the string, and each substring contains one character.) If *separator* is a regular expression, only the first match at a given position of the **this** string is considered, even if backtracking could yield a non-empty-substring match at that position. (For example, `"ab".split(/a*?/)` evaluates to the array `["a","b"]`, while `"ab".split(/a*/)` evaluates to the array `["","b"]`.)

If the **this** object is (or converts to) the empty string, the result depends on whether *separator* can match the empty string. If it can, the result array contains no elements. Otherwise, the result array contains one element, which is the empty string.

If *separator* is a regular expression that contains capturing parentheses, then each time *separator* is matched the results (including any **undefined** results) of the capturing parentheses are spliced into the output array. (For example,

`"Aboldand<CODE>coded</CODE>".split(/<(\/)?([^\<]+)>/)` evaluates to the array `["A", undefined, "B", "bold", "/", "B", "and", undefined, "CODE", "coded", "/", "CODE", ""]`.)

If *separator* is **undefined**, then the result array contains just one string, which is the **this** value (converted to a string). If *limit* is not **undefined**, then the output array is truncated so that it contains no more than *limit* elements.

When the `split` method is called, the following steps are taken:

1. Let $S = \text{ToString}(\mathbf{this})$.
2. Let A be a new array created as if by the expression `new Array()` [where Array is the standard built-in constructor with that name](#).
3. If $limit$ is **undefined**, let $lim = 2^{32}-1$; else let $lim = \text{ToUint32}(limit)$.
4. Let s be the number of characters in S .
5. Let $p = 0$.
6. If $separator$ is a RegExp object (its `[[Class]]` is `"RegExp"`), let $R = separator$; otherwise let $R = \text{ToString}(separator)$.
7. If $lim = 0$, return A .
8. If $separator$ is **undefined**, go to step 33.
9. If $s = 0$, go to step 31.
10. Let $q = p$.
11. If $q = s$, go to step 28.
12. Call `SplitMatch(R, S, q)` and let z be its `MatchResult` result.
13. If z is **failure**, go to step 26.
14. z must be a State. Let e be z 's `endIndex` and let cap be z 's `captures` array.
15. If $e = p$, go to step 26.
16. Let T be a string value equal to the substring of S consisting of the characters at positions p (inclusive) through q (exclusive).
17. Call the `[[Put]]` method of A with arguments $A.length$ and T .
18. If $A.length = lim$, return A .
19. Let $p = e$.
20. Let $i = 0$.
21. If i is equal to the number of elements in cap , go to step 10.
22. Let $i = i+1$.
23. Call the `[[Put]]` method of A with arguments $A.length$ and $cap[i]$.
24. If $A.length = lim$, return A .
25. Go to step 21.
26. Let $q = q+1$.
27. Go to step 11.
28. Let T be a string value equal to the substring of S consisting of the characters at positions p (inclusive) through s (exclusive).
29. Call the `[[Put]]` method of A with arguments $A.length$ and T .
30. Return A .
31. Call `SplitMatch(R, S, 0)` and let z be its `MatchResult` result.
32. If z is not **failure**, return A .
33. Call the `[[Put]]` method of A with arguments `"0"` and S .
34. Return A .

The [abstract operation](#) `SplitMatch` takes three parameters, a string S , an integer q , and a string or RegExp R , and performs the following in order to return a `MatchResult` (see 15.10.2.1):

1. If R is a RegExp object (its `[[Class]]` is `"RegExp"`), go to step 8.
2. R must be a string. Let r be the number of characters in R .
3. Let s be the number of characters in S .
4. If $q+r > s$ then return the `MatchResult failure`.
5. If there exists an integer i between 0 (inclusive) and r (exclusive) such that the character at position $q+i$ of S is different from the character at position i of R , then return **failure**.
6. Let cap be an empty array of captures (see 15.10.2.1).
7. Return the State $(q+r, cap)$. (see 15.10.2.1)
8. Call the `[[Match]]` method of R giving it the arguments S and q , and return the `MatchResult` result.

The `length` property of the `split` method is 2.

NOTE 1

The `split` function is intentionally generic; it does not require that its `this` value be a String object. Therefore, it can be transferred to other kinds of objects for use as a method.

NOTE 2

The **split** method ignores the value of separator **.global** for separators that are *RegExp* objects.

15.5.4.15 String.prototype.substring (start, end)

The **substring** method takes two arguments, *start* and *end*, and returns a substring of the result of converting this object to a string, starting from character position *start* and running to, but not including, character position *end* of the string (or through the end of the string if *end* is **undefined**). The result is a string value, not a *String* object.

If either argument is **NaN** or negative, it is replaced with zero; if either argument is larger than the length of the string, it is replaced with the length of the string.

If *start* is larger than *end*, they are swapped.

The following steps are taken:

1. Call **ToString**, giving it the **this** value as its argument.
2. Compute the number of characters in **Result(1)**.
3. Call **ToInteger(start)**.
4. If *end* is **undefined**, use **Result(2)**; else use **ToInteger(end)**.
5. Compute **min(max(Result(3), 0), Result(2))**.
6. Compute **min(max(Result(4), 0), Result(2))**.
7. Compute **min(Result(5), Result(6))**.
8. Compute **max(Result(5), Result(6))**.
9. Return a string whose length is the difference between **Result(8)** and **Result(7)**, containing characters from **Result(1)**, namely the characters with indices **Result(7)** through **Result(8)-1**, in ascending order.

The **length** property of the **substring** method is **2**.

NOTE

The **substring** function is intentionally generic; it does not require that its **this** value be a *String* object. Therefore, it can be transferred to other kinds of objects for use as a method.

15.5.4.16 String.prototype.toLowerCase ()

If this object is not already a string, it is converted to a string. The characters in that string are converted one by one to lower case. The result is a string value, not a *String* object.

The characters are converted one by one. The result of each conversion is the original character, unless that character has a Unicode lowercase equivalent, in which case the lowercase equivalent is used instead.

NOTE 1

The result should be derived according to the case mappings in the Unicode character database (this explicitly includes not only the *UnicodeData.txt* file, but also the *SpecialCasings.txt* file that accompanies it in Unicode 2.1.8 and later).

NOTE 2

The **toLowerCase** function is intentionally generic; it does not require that its **this** value be a *String* object. Therefore, it can be transferred to other kinds of objects for use as a method.

15.5.4.17 String.prototype.toLocaleLowerCase ()

This function works exactly the same as **toLowerCase** except that its result is intended to yield the correct result for the host environment's current locale, rather than a locale-independent result. There will only be a difference in the few cases (such as Turkish) where the rules for that language conflict with the regular Unicode case mappings.

NOTE 1

The **toLocaleLowerCase** function is intentionally generic; it does not require that its **this** value be a *String* object. Therefore, it can be transferred to other kinds of objects for use as a method.

NOTE 2

The first parameter to this function is likely to be used in a future version of this standard; it is recommended that implementations do not use this parameter position for anything else.

15.5.4.18 String.prototype.toUpperCase ()

This function behaves in exactly the same way as **String.prototype.toLowerCase**, except that characters are mapped to their *uppercase* equivalents as specified in the Unicode Character Database.

NOTE 1

*Because both **toUpperCase** and **toLowerCase** have context-sensitive behaviour, the functions are not symmetrical. In other words, **s.toUpperCase().toLowerCase()** is not necessarily equal to **s.toLowerCase()**.*

NOTE 2

*The **toUpperCase** function is intentionally generic; it does not require that its **this** value be a String object. Therefore, it can be transferred to other kinds of objects for use as a method.*

15.5.4.19 String.prototype.toLocaleUpperCase ()

This function works exactly the same as **toUpperCase** except that its result is intended to yield the correct result for the host environment's current locale, rather than a locale-independent result. There will only be a difference in the few cases (such as Turkish) where the rules for that language conflict with the regular Unicode case mappings.

NOTE 1

*The **toLocaleUpperCase** function is intentionally generic; it does not require that its **this** value be a String object. Therefore, it can be transferred to other kinds of objects for use as a method.*

NOTE 2

The first parameter to this function is likely to be used in a future version of this standard; it is recommended that implementations do not use this parameter position for anything else.

15.5.4.20 String.prototype.trim ()

If this object is not already a string, it is converted to a string. The result is a copy of the string with both leading and trailing white space removed. The definition of white space is the union of *WhiteSpace* and *LineTerminator*. The result is a string value, not a String object.

NOTE

*The **trim** function is intentionally generic; it does not require that its **this** value be a String object. Therefore, it can be transferred to other kinds of objects for use as a method.*

15.5.4.21 String.prototype.toJSON (key)

When the **toJSON** method is called with argument *key*, the following steps are taken:

1. Let *S* be the **this** value.
2. Return **ToPrimitive(S,Number)**.

NOTE

*The **toJSON** function is intentionally generic; it does not require that its **this** value be a String object. Therefore, it can be transferred to other kinds of objects for use as a method. An object is free to use the argument 'key' that is passed in to filter its stringification.*

15.5.5 Properties of String Instances

String instances inherit properties from the String prototype object and also have a **[[PrimitiveValue]]** property and a **length** property.

The **[[PrimitiveValue]]** property is the string value represented by this String object.

15.5.5.1 length

The number of characters in the String value represented by this String object.

Once a String object is created, this property is unchanging. It has the attributes { **[[Writable]]: false, [[Enumerable]]: false, [[Configurable]]: false** }.

15.5.5.2 [[GetOwnProperty]] (P)

String objects use a variation of the **[[GetOwnProperty]]** method used for other native ECMAScript objects (8.12.1).

Deleted: *O*

Deleted: object

Deleted: Call

Deleted: the **[[Get]]** method of *O* with argument "**valueOf**".

```

Deleted: <#>If IsCallable(Result(2)) is false, go to step 6¶
<#>Call the [[Call]] method of Result(2) with O as the this value and an empty argument list.¶
<#>If Result(4) is a primitive value, return Result(4).¶
<#>Throw a TypeError exception.¶

```

Deleted: **DontEnum, DontDelete, ReadOnly**

Deleted: 8.6.2.8

Assume *S* is a String object and *P* is a string.

When the `[[GetOwnProperty]]` method of *S* is called with property name *P*, the following steps are taken:

1. Let *desc* be the result of calling the default `[[GetOwnProperty]]` method (§.12.1) on *S* with argument *P*.
2. If *desc* is not **undefined** return *desc*.
3. If *P* is not an array index (15.4), return **undefined**.
4. Let *str* be `Tostring(S)`.
5. Let *index* be `ToUint32(P)`.
6. Let *len* be the number of characters in *str*.
7. If *len* < *index*, return **undefined**.
8. Let *resultStr* be a String of length 1, containing one character from *str*, specifically the character at position *index*, where the first (leftmost) character in *str* is considered to be at position 0, the next one at position 1, and so on.
9. Return a Property Descriptor { `[[Value]]`: *resultStr*, `[[Enumerable]]`: **true**, `[[Writable]]`: **false**, `[[Configurable]]`: **false** }.

- Deleted: Call
- Deleted: 8.6.2.8
- Deleted: with
- Deleted: as the this value and
- Deleted: Result(1)
- Deleted: Result(1)
- Deleted: Call
- Deleted: , giving
- Deleted:
- Deleted: as its argument
- Deleted: Call ToInteger(P).
- Deleted: Compute
- Deleted: Result(4)
- Deleted: Result(5) is less than 0 or
- Deleted: is not less than Result(6)
- Deleted: Create a
- Deleted: s
- Deleted: Result(4)
- Deleted: namely
- Deleted: Result(5)
- Deleted: Result(4)
- Deleted: Result(8)
- Deleted: false

15.6 Boolean Objects

15.6.1 The Boolean Constructor Called as a Function

When **Boolean** is called as a function rather than as a constructor, it performs a type conversion.

15.6.1.1 Boolean (value)

Returns a boolean value (not a Boolean object) computed by `ToBoolean(value)`.

15.6.2 The Boolean Constructor

When **Boolean** is called as part of a **new** expression it is a constructor: it initialises the newly created object.

15.6.2.1 new Boolean (value)

The `[[Prototype]]` property of the newly constructed object is set to the original Boolean prototype object, the one that is the initial value of `Boolean.prototype` (15.6.3.1).

The `[[Class]]` property of the newly constructed Boolean object is set to **"Boolean"**.

The `[[PrimitiveValue]]` property of the newly constructed Boolean object is set to `ToBoolean(value)`.

The `[[Extensible]]` property of the newly constructed object is set to **true**.

15.6.3 Properties of the Boolean Constructor

The value of the internal `[[Prototype]]` property of the Boolean constructor is the Function prototype object (15.3.4).

Besides the internal properties and the **length** property (whose value is **1**), the Boolean constructor has the following property:

15.6.3.1 Boolean.prototype

The initial value of `Boolean.prototype` is the Boolean prototype object (15.6.4).

This property has the attributes { `[[Writable]]`: **false**, `[[Enumerable]]`: **false**, `[[Configurable]]`: **false** }.

Deleted: DontEnum, DontDelete, ReadOnly

15.6.4 Properties of the Boolean Prototype Object

The Boolean prototype object is itself a Boolean object (its `[[Class]]` is **"Boolean"**) whose value is **false**.

The value of the internal `[[Prototype]]` property of the Boolean prototype object is the standard built-in Object prototype object (15.2.4).

Deleted: 15.2.3.1

In following descriptions of functions that are properties of the Boolean prototype object, the phrase "this Boolean object" refers to the object that is the **this** value for the invocation of the function; a **TypeError** exception is thrown if the **this** value is not an object for which the value of the internal `[[Class]]` property is **"Boolean"**. Also, the phrase "this boolean value" refers to the boolean value

represented by this Boolean object, that is, the value of the internal `[[PrimitiveValue]]` property of this Boolean object.

15.6.4.1 **Boolean.prototype.constructor**

The initial value of `Boolean.prototype.constructor` is the built-in `Boolean` constructor.

15.6.4.2 **Boolean.prototype.toString ()**

If this boolean value is `true`, then the string `"true"` is returned. Otherwise, this boolean value must be `false`, and the string `"false"` is returned.

The `toString` function is not generic; it throws a `TypeError` exception if its `this` value is not a [Boolean](#) or a Boolean object. Therefore, it cannot be transferred to other kinds of objects for use as a method.

15.6.4.3 **Boolean.prototype.valueOf ()**

Returns this boolean value.

The `valueOf` function is not generic; it throws a `TypeError` exception if its `this` value is not a [Boolean](#) or a Boolean object. Therefore, it cannot be transferred to other kinds of objects for use as a method.

15.6.4.4 **Boolean.prototype.toJSON (key)**

When the `toJSON` method is called with argument `key`, the following steps are taken:

1. Let `O` be this object.
2. Call the `[[Get]]` method of `O` with argument `"valueOf"`.
3. If `IsCallable(Result(2))` is `false`, go to step 6.
4. Call the `[[Call]]` method of `Result(2)` with `O` as the `this` value and an empty argument list.
5. If `Result(4)` is a primitive value, return `Result(4)`.
6. Throw a `TypeError` exception.

NOTE

The `toJSON` function is intentionally generic: it does not require that its `this` value be a Boolean object. Therefore, it can be transferred to other kinds of objects for use as a method. An object is free to use the argument `'key'` that is passed in to filter its stringification.

15.6.5 **Properties of Boolean Instances**

Boolean instances have no special properties beyond those inherited from the Boolean prototype object.

15.7 **Number Objects**

15.7.1 **The Number Constructor Called as a Function**

When `Number` is called as a function rather than as a constructor, it performs a type conversion.

15.7.1.1 **Number ([value])**

Returns a number value (not a Number object) computed by `ToNumber(value)` if `value` was supplied, else returns `+0`.

15.7.2 **The Number Constructor**

When `Number` is called as part of a `new` expression it is a constructor: it initialises the newly created object.

15.7.2.1 **new Number ([value])**

The `[[Prototype]]` property of the newly constructed object is set to the original Number prototype object, the one that is the initial value of `Number.prototype` (15.7.3.1).

The `[[Class]]` property of the newly constructed object is set to `"Number"`.

The `[[PrimitiveValue]]` property of the newly constructed object is set to `ToNumber(value)` if `value` was supplied, else to `+0`.

The `[[Extensible]]` property of the newly constructed object is set to `true`.

15.7.3 Properties of the Number Constructor

The value of the internal `[[Prototype]]` property of the Number constructor is the Function prototype object (15.3.4).

Besides the internal properties and the `length` property (whose value is `1`), the Number constructor has the following property:

15.7.3.1 `Number.prototype`

The initial value of `Number.prototype` is the Number prototype object (15.7.4).

This property has the attributes `{ [[Writable]]: false, [[Enumerable]]: false, [[Configurable]]: false }`.

Deleted: DontEnum, DontDelete, ReadOnly

15.7.3.2 `Number.MAX_VALUE`

The value of `Number.MAX_VALUE` is the largest positive finite value of the number type, which is approximately $1.7976931348623157 \times 10^{308}$.

This property has the attributes `{ [[Writable]]: false, [[Enumerable]]: false, [[Configurable]]: false }`.

Deleted: DontEnum, DontDelete, ReadOnly

15.7.3.3 `Number.MIN_VALUE`

The value of `Number.MIN_VALUE` is the smallest positive value of the number type, which is approximately 5×10^{-324} .

This property has the attributes `{ [[Writable]]: false, [[Enumerable]]: false, [[Configurable]]: false }`.

Deleted: DontEnum, DontDelete, ReadOnly

15.7.3.4 `Number.NaN`

The value of `Number.NaN` is `NaN`.

This property has the attributes `{ [[Writable]]: false, [[Enumerable]]: false, [[Configurable]]: false }`.

Deleted: DontEnum, DontDelete, ReadOnly

15.7.3.5 `Number.NEGATIVE_INFINITY`

The value of `Number.NEGATIVE_INFINITY` is $-\infty$.

This property has the attributes `{ [[Writable]]: false, [[Enumerable]]: false, [[Configurable]]: false }`.

Deleted: DontEnum, DontDelete, ReadOnly

15.7.3.6 `Number.POSITIVE_INFINITY`

The value of `Number.POSITIVE_INFINITY` is $+\infty$.

This property has the attributes `{ [[Writable]]: false, [[Enumerable]]: false, [[Configurable]]: false }`.

Deleted: DontEnum, DontDelete, ReadOnly

15.7.4 Properties of the Number Prototype Object

The Number prototype object is itself a Number object (its `[[Class]]` is `"Number"`) whose value is `+0`.

The value of the internal `[[Prototype]]` property of the Number prototype object is the [standard built-in Object prototype object](#) (15.2.4).

Deleted: 15.2.3.1

In following descriptions of functions that are properties of the Number prototype object, the phrase “this Number object” refers to the object that is the `this` value for the invocation of the function; a `TypeError` exception is thrown if the `this` value is not an object for which the value of the internal `[[Class]]` property is `"Number"`. Also, the phrase “this number value” refers to the number value represented by this Number object, that is, the value of the internal `[[PrimitiveValue]]` property of this Number object.

15.7.4.1 `Number.prototype.constructor`

The initial value of `Number.prototype.constructor` is the built-in `Number` constructor.

15.7.4.2 `Number.prototype.toString(radix)`

If `radix` is the number `10` or `undefined`, then this number value is given as an argument to the `ToString` operator; the resulting string value is returned.

If `radix` is an integer from `2` to `36`, but not `10`, the result is a string, the choice of which is implementation-dependent.

The `toString` function is not generic; it throws a `TypeError` exception if its `this` value is not a [Number or a](#) Number object. Therefore, it cannot be transferred to other kinds of objects for use as a method.

15.7.4.3 **Number.prototype.toLocaleString()**

Produces a string value that represents the value of the Number formatted according to the conventions of the host environment's current locale. This function is implementation-dependent, and it is permissible, but not encouraged, for it to return the same thing as **toString**.

NOTE

The first parameter to this function is likely to be used in a future version of this standard; it is recommended that implementations do not use this parameter position for anything else.

15.7.4.4 **Number.prototype.valueOf()**

Returns this number value.

The **valueOf** function is not generic; it throws a **TypeError** exception if its **this** value is not a [Number or a](#) Number object. Therefore, it cannot be transferred to other kinds of objects for use as a method.

15.7.4.5 **Number.prototype.toFixed(fractionDigits)**

Return a string containing the number represented in fixed-point notation with *fractionDigits* digits after the decimal point. If *fractionDigits* is **undefined**, 0 is assumed. Specifically, perform the following steps:

1. Let *f* be **ToInteger**(*fractionDigits*). (If *fractionDigits* is **undefined**, this step produces the value 0).
2. If $f < 0$ or $f > 20$, throw a **RangeError** exception.
3. Let *x* be this number value.
4. If *x* is **NaN**, return the string "**NaN**".
5. Let *s* be the empty string.
6. If $x \geq 0$, go to step 9.
7. Let *s* be "-".
8. Let $x = -x$.
9. If $x \geq 10^{21}$, let *m* = **ToString**(*x*) and go to step 20.
10. Let *n* be an integer for which the exact mathematical value of $n \div 10^f - x$ is as close to zero as possible. If there are two such *n*, pick the larger *n*.
11. If $n = 0$, let *m* be the string "0". Otherwise, let *m* be the string consisting of the digits of the decimal representation of *n* (in order, with no leading zeroes).
12. If $f = 0$, go to step 20.
13. Let *k* be the number of characters in *m*.
14. If $k > f$, go to step 18.
15. Let *z* be the string consisting of $f+1-k$ occurrences of the character '0'.
16. Let *m* be the concatenation of strings *z* and *m*.
17. Let $k = f + 1$.
18. Let *a* be the first $k-f$ characters of *m*, and let *b* be the remaining *f* characters of *m*.
19. Let *m* be the concatenation of the three strings *a*, ".", and *b*.
20. Return the concatenation of the strings *s* and *m*.

The **length** property of the **toFixed** method is 1.

If the **toFixed** method is called with more than one argument, then the behaviour is undefined (see clause 15).

An implementation is permitted to extend the behaviour of **toFixed** for values of *fractionDigits* less than 0 or greater than 20. In this case **toFixed** would not necessarily throw **RangeError** for such values.

NOTE

*The output of **toFixed** may be more precise than **toString** for some values because **toString** only prints enough significant digits to distinguish the number from adjacent number values. For example, `(10000000000000000128).toString()` returns `"1000000000000000100"`, while `(10000000000000000128).toFixed(0)` returns `"1000000000000000128"`.*

15.7.4.6 Number.prototype.toExponential (fractionDigits)

Return a string containing the number represented in exponential notation with one digit before the significand's decimal point and *fractionDigits* digits after the significand's decimal point. If *fractionDigits* is **undefined**, include as many significand digits as necessary to uniquely specify the number (just like in ToString except that in this case the number is always output in exponential notation). Specifically, perform the following steps:

1. Let *x* be this number value.
 2. Let *f* be ToInteger(*fractionDigits*).
 3. If *x* is NaN, return the string "NaN".
 4. Let *s* be the empty string.
 5. If $x \geq 0$, go to step 8.
 6. Let *s* be "-".
 7. Let $x = -x$.
 8. If $x = +\infty$, let *m* = "Infinity" and go to step 30.
 9. If *fractionDigits* is **undefined**, go to step 14.
 10. If $f < 0$ or $f > 20$, throw a **RangeError** exception.
 11. If $x = 0$, go to step 16.
 12. Let *e* and *n* be integers such that $10^f \leq n < 10^{f+1}$ and for which the exact mathematical value of $n \times 10^{e-f} - x$ is as close to zero as possible. If there are two such sets of *e* and *n*, pick the *e* and *n* for which $n \times 10^{e-f}$ is larger.
 13. Go to step 20.
 14. If $x \neq 0$, go to step 19.
 15. Let *f* = 0.
 16. Let *m* be the string consisting of *f*+1 occurrences of the character '0'.
 17. Let *e* = 0.
 18. Go to step 21.
 19. Let *e*, *n*, and *f* be integers such that $f \geq 0$, $10^f \leq n < 10^{f+1}$, the number value for $n \times 10^{e-f}$ is *x*, and *f* is as small as possible. Note that the decimal representation of *n* has *f*+1 digits, *n* is not divisible by 10, and the least significant digit of *n* is not necessarily uniquely determined by these criteria.
 20. Let *m* be the string consisting of the digits of the decimal representation of *n* (in order, with no leading zeroes).
 21. If *f* = 0, go to step 24.
 22. Let *a* be the first character of *m*, and let *b* be the remaining *f* characters of *m*.
 23. Let *m* be the concatenation of the three strings *a*, ".", and *b*.
 24. If *e* = 0, let *c* = "+" and *d* = "0" and go to step 29.
 25. If *e* > 0, let *c* = "+" and go to step 28.
 26. Let *c* = "-".
 27. Let $e = -e$.
 28. Let *d* be the string consisting of the digits of the decimal representation of *e* (in order, with no leading zeroes).
 29. Let *m* be the concatenation of the four strings *m*, "e", *c*, and *d*.
 30. Return the concatenation of the strings *s* and *m*.
- The **length** property of the **toExponential** method is 1.

If the **toExponential** method is called with more than one argument, then the behaviour is undefined (see clause 15).

An implementation is permitted to extend the behaviour of **toExponential** for values of *fractionDigits* less than 0 or greater than 20. In this case **toExponential** would not necessarily throw **RangeError** for such values.

NOTE

For implementations that provide more accurate conversions than required by the rules above, it is recommended that the following alternative version of step 19 be used as a guideline:

Let *e*, *n*, and *f* be integers such that $f \geq 0$, $10^f \leq n < 10^{f+1}$, the number value for $n \times 10^{e-f}$ is *x*, and *f* is as small as possible. If there are multiple possibilities for *n*, choose the value of *n* for which $n \times 10^{e-f}$ is closest in value to *x*. If there are two such possible values of *n*, choose the one that is even.

15.7.4.7 **Number.prototype.toPrecision (precision)**

Return a string containing the number represented either in exponential notation with one digit before the significand's decimal point and *precision*-1 digits after the significand's decimal point or in fixed notation with *precision* significant digits. If *precision* is **undefined**, call ToString (9.8.1) instead. Specifically, perform the following steps:

1. Let *x* be this number value.
2. If *precision* is **undefined**, return ToString(*x*).
3. Let *p* be ToInteger(*precision*).
4. If *x* is **NaN**, return the string "**NaN**".
5. Let *s* be the empty string.
6. If $x \geq 0$, go to step 9.
7. Let *s* be "-".
8. Let $x = -x$.
9. If $x = +\infty$, let *m* = "**Infinity**" and go to step 30.
10. If $p < 1$ or $p > 21$, throw a **RangeError** exception.
11. If $x \neq 0$, go to step 15.
12. Let *m* be the string consisting of *p* occurrences of the character '0'.
13. Let *e* = 0.
14. Go to step 18.
15. Let *e* and *n* be integers such that $10^{e-1} \leq n < 10^e$ and for which the exact mathematical value of $n \times 10^{e-p+1} - x$ is as close to zero as possible. If there are two such sets of *e* and *n*, pick the *e* and *n* for which $n \times 10^{e-p+1}$ is larger.
16. Let *m* be the string consisting of the digits of the decimal representation of *n* (in order, with no leading zeroes).
17. If $e < -6$ or $e \geq p$, go to step 22.
18. If $e = p-1$, go to step 30.
19. If $e \geq 0$, let *m* be the concatenation of the first *e*+1 characters of *m*, the character '.', and the remaining $p-(e+1)$ characters of *m* and go to step 30.
20. Let *m* be the concatenation of the string "0.", $-(e+1)$ occurrences of the character '0', and the string *m*.
21. Go to step 30.
22. Let *a* be the first character of *m*, and let *b* be the remaining $p-1$ characters of *m*.
23. Let *m* be the concatenation of the three strings *a*, ".", and *b*.
24. If $e = 0$, let *c* = "+" and *d* = "0" and go to step 29.
25. If $e > 0$, let *c* = "+" and go to step 28.
26. Let *c* = "-".
27. Let $e = -e$.
28. Let *d* be the string consisting of the digits of the decimal representation of *e* (in order, with no leading zeroes).
29. Let *m* be the concatenation of the four strings *m*, "e", *c*, and *d*.
30. Return the concatenation of the strings *s* and *m*.

The **length** property of the **toPrecision** method is **1**.

If the **toPrecision** method is called with more than one argument, then the behaviour is undefined (see clause 15).

An implementation is permitted to extend the behaviour of **toPrecision** for values of *precision* less than 1 or greater than 21. In this case **toPrecision** would not necessarily throw **RangeError** for such values.

15.7.4.8 **Number.prototype.toJSON (key)**

When the toJSON method is called with argument key, the following steps are taken:

1. Let *O* be this object.
2. Call the [[Get]] method of *O* with argument "**valueOf**".
3. If IsCallable(Result(2)) is false, go to step 6
4. Call the [[Call]] method of Result(2) with *O* as the **this** value and an empty argument list.

5. If `Result(4)` is a primitive value, return `Result(4)`.

6. Throw a `TypeError` exception.

NOTE

The `toJSON` function is intentionally generic: it does not require that its `this` value be a `Number` object. Therefore, it can be transferred to other kinds of objects for use as a method. An object is free to use the argument 'key' that is passed in to filter its stringification.

15.7.5 Properties of Number Instances

Number instances have no special properties beyond those inherited from the `Number` prototype object.

15.8 The Math Object

The `Math` object is a single object that has some named properties, some of which are functions.

The value of the internal `[[Prototype]]` property of the `Math` object is the `standard built-in` `Object` prototype object (15.2.4). The value of the internal `[[Class]]` property of the `Math` object is `"Math"`.

The `Math` object does not have a `[[Construct]]` property; it is not possible to use the `Math` object as a constructor with the `new` operator.

The `Math` object does not have a `[[Call]]` property; it is not possible to invoke the `Math` object as a function.

NOTE

In this specification, the phrase "the number value for `x`" has a technical meaning defined in 8.5.

15.8.1 Value Properties of the Math Object

15.8.1.1 `E`

The number value for e , the base of the natural logarithms, which is approximately 2.7182818284590452354.

This property has the attributes { `[[Writable]]: false`, `[[Enumerable]]: false`, `[[Configurable]]: false` }.

Deleted: 15.2.3.1

Deleted: DontEnum, DontDelete, ReadOnly

15.8.1.2 `LN10`

The number value for the natural logarithm of 10, which is approximately 2.302585092994046.

This property has the attributes { `[[Writable]]: false`, `[[Enumerable]]: false`, `[[Configurable]]: false` }.

Deleted: DontEnum, DontDelete, ReadOnly

15.8.1.3 `LN2`

The number value for the natural logarithm of 2, which is approximately 0.6931471805599453.

This property has the attributes { `[[Writable]]: false`, `[[Enumerable]]: false`, `[[Configurable]]: false` }.

Deleted: DontEnum, DontDelete, ReadOnly

15.8.1.4 `LOG2E`

The number value for the base-2 logarithm of e , the base of the natural logarithms; this value is approximately 1.4426950408889634.

This property has the attributes { `[[Writable]]: false`, `[[Enumerable]]: false`, `[[Configurable]]: false` }.

Deleted: DontEnum, DontDelete, ReadOnly

NOTE

The value of `Math.LOG2E` is approximately the reciprocal of the value of `Math.LN2`.

15.8.1.5 `LOG10E`

The number value for the base-10 logarithm of e , the base of the natural logarithms; this value is approximately 0.4342944819032518.

This property has the attributes { `[[Writable]]: false`, `[[Enumerable]]: false`, `[[Configurable]]: false` }.

Deleted: DontEnum, DontDelete, ReadOnly

NOTE

The value of `Math.LOG10E` is approximately the reciprocal of the value of `Math.LN10`.

15.8.1.6 `PI`

The number value for π , the ratio of the circumference of a circle to its diameter, which is approximately 3.1415926535897932.

This property has the attributes { `[[Writable]]: false`, `[[Enumerable]]: false`, `[[Configurable]]: false` }.

Deleted: DontEnum, DontDelete, ReadOnly

15.8.1.7 **SQRT1_2**

The number value for the square root of 1/2, which is approximately 0.7071067811865476.

This property has the attributes { `[[Writable]]: false, [[Enumerable]]: false, [[Configurable]]: false,` }.

NOTE

The value of `Math.SQRT1_2` is approximately the reciprocal of the value of `Math.SQRT2`.

15.8.1.8 **SQRT2**

The number value for the square root of 2, which is approximately 1.4142135623730951.

This property has the attributes { `[[Writable]]: false, [[Enumerable]]: false, [[Configurable]]: false,` }.

Deleted: DontEnum, DontDelete, ReadOnly

Deleted: DontEnum, DontDelete, ReadOnly

15.8.2 **Function Properties of the Math Object**

Every function listed in this section applies the ToNumber operator to each of its arguments (in left-to-right order if there is more than one) and then performs a computation on the resulting number value(s).

In the function descriptions below, the symbols NaN, -0 , $+0$, $-\infty$ and $+\infty$ refer to the number values described in 8.5.

NOTE

The behaviour of the functions `acos`, `asin`, `atan`, `atan2`, `cos`, `exp`, `log`, `pow`, `sin`, and `sqrt` is not precisely specified here except to require specific results for certain argument values that represent boundary cases of interest. For other argument values, these functions are intended to compute approximations to the results of familiar mathematical functions, but some latitude is allowed in the choice of approximation algorithms. The general intent is that an implementer should be able to use the same mathematical library for ECMAScript on a given hardware platform that is available to C programmers on that platform.

Although the choice of algorithms is left to the implementation, it is recommended (but not specified by this standard) that implementations use the approximation algorithms for IEEE 754 arithmetic contained in `fdlibm`, the freely distributable mathematical library from Sun Microsystems (fdlibm-comment@sunpro.eng.sun.com). This specification also requires specific results for certain argument values that represent boundary cases of interest

15.8.2.1 **abs (x)**

Returns the absolute value of x ; the result has the same magnitude as x but has positive sign.

If x is NaN, the result is NaN.

If x is -0 , the result is $+0$.

If x is $-\infty$, the result is $+\infty$.

15.8.2.2 **acos (x)**

Returns an implementation-dependent approximation to the arc cosine of x . The result is expressed in radians and ranges from $+0$ to $+\pi$.

If x is NaN, the result is NaN.

If x is greater than 1, the result is NaN.

If x is less than -1 , the result is NaN.

If x is exactly 1, the result is $+0$.

15.8.2.3 **asin (x)**

Returns an implementation-dependent approximation to the arc sine of x . The result is expressed in radians and ranges from $-\pi/2$ to $+\pi/2$.

If x is NaN, the result is NaN.

If x is greater than 1, the result is NaN.

If x is less than -1 , the result is NaN.

If x is $+0$, the result is $+0$.

If x is -0 , the result is -0 .

15.8.2.4 atan (x)

Returns an implementation-dependent approximation to the arc tangent of x . The result is expressed in radians and ranges from $-\pi/2$ to $+\pi/2$.

If x is NaN, the result is NaN.

If x is +0, the result is +0.

If x is -0, the result is -0.

If x is $+\infty$, the result is an implementation-dependent approximation to $+\pi/2$.

If x is $-\infty$, the result is an implementation-dependent approximation to $-\pi/2$.

15.8.2.5 atan2 (y, x)

Returns an implementation-dependent approximation to the arc tangent of the quotient y/x of the arguments y and x , where the signs of y and x are used to determine the quadrant of the result. Note that it is intentional and traditional for the two-argument arc tangent function that the argument named y be first and the argument named x be second. The result is expressed in radians and ranges from $-\pi$ to $+\pi$.

If either x or y is NaN, the result is NaN.

If $y > 0$ and x is +0, the result is an implementation-dependent approximation to $+\pi/2$.

If $y > 0$ and x is -0, the result is an implementation-dependent approximation to $+\pi/2$.

If y is +0 and $x > 0$, the result is +0.

If y is +0 and x is +0, the result is +0.

If y is +0 and x is -0, the result is an implementation-dependent approximation to $+\pi$.

If y is +0 and $x < 0$, the result is an implementation-dependent approximation to $+\pi$.

If y is -0 and $x > 0$, the result is -0.

If y is -0 and x is +0, the result is -0.

If y is -0 and x is -0, the result is an implementation-dependent approximation to $-\pi$.

If y is -0 and $x < 0$, the result is an implementation-dependent approximation to $-\pi$.

If $y < 0$ and x is +0, the result is an implementation-dependent approximation to $-\pi/2$.

If $y < 0$ and x is -0, the result is an implementation-dependent approximation to $-\pi/2$.

If $y > 0$ and y is finite and x is $+\infty$, the result is +0.

If $y > 0$ and y is finite and x is $-\infty$, the result is an implementation-dependent approximation to $+\pi$.

If $y < 0$ and y is finite and x is $+\infty$, the result is -0.

If $y < 0$ and y is finite and x is $-\infty$, the result is an implementation-dependent approximation to $-\pi$.

If y is $+\infty$ and x is finite, the result is an implementation-dependent approximation to $+\pi/2$.

If y is $-\infty$ and x is finite, the result is an implementation-dependent approximation to $-\pi/2$.

If y is $+\infty$ and x is $+\infty$, the result is an implementation-dependent approximation to $+\pi/4$.

If y is $+\infty$ and x is $-\infty$, the result is an implementation-dependent approximation to $+3\pi/4$.

If y is $-\infty$ and x is $+\infty$, the result is an implementation-dependent approximation to $-\pi/4$.

If y is $-\infty$ and x is $-\infty$, the result is an implementation-dependent approximation to $-3\pi/4$.

15.8.2.6 ceil (x)

Returns the smallest (closest to $-\infty$) number value that is not less than x and is equal to a mathematical integer. If x is already an integer, the result is x .

If x is NaN, the result is NaN.

If x is +0, the result is +0.

If x is -0, the result is -0.

If x is $+\infty$, the result is $+\infty$.

If x is $-\infty$, the result is $-\infty$.

If x is less than 0 but greater than -1, the result is -0.

The value of `Math.ceil(x)` is the same as the value of `-Math.floor(-x)`.

15.8.2.7 cos (x)

Returns an implementation-dependent approximation to the cosine of x . The argument is expressed in radians.

If x is NaN, the result is NaN.

If x is +0, the result is 1.

If x is -0, the result is 1.

If x is $+\infty$, the result is NaN.

If x is $-\infty$, the result is NaN.

15.8.2.8 exp (x)

Returns an implementation-dependent approximation to the exponential function of x (e raised to the power of x , where e is the base of the natural logarithms).

If x is NaN, the result is NaN.

If x is +0, the result is 1.

If x is -0, the result is 1.

If x is $+\infty$, the result is $+\infty$.

If x is $-\infty$, the result is +0.

15.8.2.9 floor (x)

Returns the greatest (closest to $+\infty$) number value that is not greater than x and is equal to a mathematical integer. If x is already an integer, the result is x .

If x is NaN, the result is NaN.

If x is +0, the result is +0.

If x is -0, the result is -0.

If x is $+\infty$, the result is $+\infty$.

If x is $-\infty$, the result is $-\infty$.

If x is greater than 0 but less than 1, the result is +0.

NOTE

The value of `Math.floor(x)` is the same as the value of `-Math.ceil(-x)`.

15.8.2.10 log (x)

Returns an implementation-dependent approximation to the natural logarithm of x .

If x is NaN, the result is NaN.

If x is less than 0, the result is NaN.

If x is +0 or -0, the result is $-\infty$.

If x is 1, the result is +0.

If x is $+\infty$, the result is $+\infty$.

15.8.2.11 max ([value1 [, value2 [, ...]]])

Given zero or more arguments, calls `ToNumber` on each of the arguments and returns the largest of the resulting values.

If no arguments are given, the result is $-\infty$.

If any value is NaN, the result is NaN.

The comparison of values to determine the largest value is done as in 11.8.5 except that +0 is considered to be larger than -0.

The **length** property of the **max** method is 2.

15.8.2.12 min ([value1 [, value2 [, ...]]])

Given zero or more arguments, calls ToNumber on each of the arguments and returns the smallest of the resulting values.

If no arguments are given, the result is $+\infty$.

If any value is NaN, the result is NaN.

The comparison of values to determine the smallest value is done as in 11.8.5 except that $+0$ is considered to be larger than -0 .

The **length** property of the **min** method is 2.

15.8.2.13 pow (x, y)

Returns an implementation-dependent approximation to the result of raising x to the power y .

If y is NaN, the result is NaN.

If y is $+0$, the result is 1, even if x is NaN.

If y is -0 , the result is 1, even if x is NaN.

If x is NaN and y is nonzero, the result is NaN.

If $\text{abs}(x) > 1$ and y is $+\infty$, the result is $+\infty$.

If $\text{abs}(x) > 1$ and y is $-\infty$, the result is $+0$.

If $\text{abs}(x) == 1$ and y is $+\infty$, the result is NaN.

If $\text{abs}(x) == 1$ and y is $-\infty$, the result is NaN.

If $\text{abs}(x) < 1$ and y is $+\infty$, the result is $+0$.

If $\text{abs}(x) < 1$ and y is $-\infty$, the result is $+\infty$.

If x is $+\infty$ and $y > 0$, the result is $+\infty$.

If x is $+\infty$ and $y < 0$, the result is $+0$.

If x is $-\infty$ and $y > 0$ and y is an odd integer, the result is $-\infty$.

If x is $-\infty$ and $y > 0$ and y is not an odd integer, the result is $+\infty$.

If x is $-\infty$ and $y < 0$ and y is an odd integer, the result is -0 .

If x is $-\infty$ and $y < 0$ and y is not an odd integer, the result is $+0$.

If x is $+0$ and $y > 0$, the result is $+0$.

If x is $+0$ and $y < 0$, the result is $+\infty$.

If x is -0 and $y > 0$ and y is an odd integer, the result is -0 .

If x is -0 and $y > 0$ and y is not an odd integer, the result is $+0$.

If x is -0 and $y < 0$ and y is an odd integer, the result is $-\infty$.

If x is -0 and $y < 0$ and y is not an odd integer, the result is $+\infty$.

If $x < 0$ and x is finite and y is finite and y is not an integer, the result is NaN.

15.8.2.14 random ()

Returns a number value with positive sign, greater than or equal to 0 but less than 1, chosen randomly or pseudo randomly with approximately uniform distribution over that range, using an implementation-dependent algorithm or strategy. This function takes no arguments.

15.8.2.15 round (x)

Returns the number value that is closest to x and is equal to a mathematical integer. If two integer number values are equally close to x , then the result is the number value that is closer to $+\infty$. If x is already an integer, the result is x .

If x is NaN, the result is NaN.

If x is $+0$, the result is $+0$.

If x is -0 , the result is -0 .

If x is $+\infty$, the result is $+\infty$.

If x is $-\infty$, the result is $-\infty$.

If x is greater than 0 but less than 0.5, the result is +0.

If x is less than 0 but greater than or equal to -0.5, the result is -0.

NOTE 1

Math.round(3.5) returns 4, but Math.round(-3.5) returns -3.

NOTE 2

*The value of **Math.round(x)** is the same as the value of **Math.floor(x+0.5)**, except when x is -0 or is less than 0 but greater than or equal to -0.5; for these cases **Math.round(x)** returns -0, but **Math.floor(x+0.5)** returns +0.*

15.8.2.16 sin (x)

Returns an implementation-dependent approximation to the sine of x . The argument is expressed in radians.

If x is NaN, the result is NaN.

If x is +0, the result is +0.

If x is -0, the result is -0.

If x is $+\infty$ or $-\infty$, the result is NaN.

15.8.2.17 sqrt (x)

Returns an implementation-dependent approximation to the square root of x .

If x is NaN, the result is NaN.

If x less than 0, the result is NaN.

If x is +0, the result is +0.

If x is -0, the result is -0.

If x is $+\infty$, the result is $+\infty$.

15.8.2.18 tan (x)

Returns an implementation-dependent approximation to the tangent of x . The argument is expressed in radians.

If x is NaN, the result is NaN.

If x is +0, the result is +0.

If x is -0, the result is -0.

If x is $+\infty$ or $-\infty$, the result is NaN.

15.9 Date Objects

15.9.1 Overview of Date Objects and Definitions of Internal Operators

A Date object contains a number indicating a particular instant in time to within a millisecond. The number may also be NaN, indicating that the Date object does not represent a specific instant of time.

The following sections define a number of functions for operating on time values. Note that, in every case, if any argument to such a function is NaN, the result will be NaN.

15.9.1.1 Time Range

Time is measured in ECMAScript in milliseconds since 01 January, 1970 UTC. Leap seconds are ignored. It is assumed that there are exactly 86,400,000 milliseconds per day. ECMAScript number values can represent all integers from -9,007,199,254,740,991 to 9,007,199,254,740,991; this range suffices to measure times to millisecond precision for any instant that is within approximately 285,616 years, either forward or backward, from 01 January, 1970 UTC.

The actual range of times supported by ECMAScript Date objects is slightly smaller: exactly -100,000,000 days to 100,000,000 days measured relative to midnight at the beginning of 01 January, 1970 UTC. This gives a range of 8,640,000,000,000,000 milliseconds to either side of 01 January, 1970 UTC.

The exact moment of midnight at the beginning of 01 January, 1970 UTC is represented by the value +0.

15.9.1.2 Day Number and Time within Day

A given time value t belongs to day number

$$\text{Day}(t) = \text{floor}(t / \text{msPerDay})$$

where the number of milliseconds per day is

$$\text{msPerDay} = 86400000$$

The remainder is called the time within the day:

$$\text{TimeWithinDay}(t) = t \text{ modulo } \text{msPerDay}$$

15.9.1.3 Year Number

ECMAScript uses an extrapolated Gregorian system to map a day number to a year number and to determine the month and date within that year. In this system, leap years are precisely those which are (divisible by 4) and (not divisible by 100) or (divisible by 400). The number of days in year number y is therefore defined by

$$\begin{aligned} \text{DaysInYear}(y) &= 365 \text{ if } (y \text{ modulo } 4) \neq 0 \\ &= 366 \text{ if } (y \text{ modulo } 4) = 0 \text{ and } (y \text{ modulo } 100) \neq 0 \\ &= 365 \text{ if } (y \text{ modulo } 100) = 0 \text{ and } (y \text{ modulo } 400) \neq 0 \\ &= 366 \text{ if } (y \text{ modulo } 400) = 0 \end{aligned}$$

All non-leap years have 365 days with the usual number of days per month and leap years have an extra day in February. The day number of the first day of year y is given by:

$$\text{DayFromYear}(y) = 365 \times (y-1970) + \text{floor}((y-1969)/4) - \text{floor}((y-1901)/100) + \text{floor}((y-1601)/400)$$

The time value of the start of a year is:

$$\text{TimeFromYear}(y) = \text{msPerDay} \times \text{DayFromYear}(y)$$

A time value determines a year by:

$$\text{YearFromTime}(t) = \text{the largest integer } y \text{ (closest to positive infinity) such that } \text{TimeFromYear}(y) \leq t$$

The leap-year function is 1 for a time within a leap year and otherwise is zero:

$$\begin{aligned} \text{InLeapYear}(t) &= 0 \text{ if } \text{DaysInYear}(\text{YearFromTime}(t)) = 365 \\ &= 1 \text{ if } \text{DaysInYear}(\text{YearFromTime}(t)) = 366 \end{aligned}$$

15.9.1.4 Month Number

Months are identified by an integer in the range 0 to 11, inclusive. The mapping $\text{MonthFromTime}(t)$ from a time value t to a month number is defined by:

$$\begin{array}{llll} \text{MonthFromTime}(t) = 0 & \text{if} & 0 & \leq \text{DayWithinYear}(t) < 31 \\ = 1 & \text{if} & 31 & \leq \text{DayWithinYear}(t) < 59 + \text{InLeapYear}(t) \\ = 2 & \text{if} & 59 + \text{InLeapYear}(t) & \leq \text{DayWithinYear}(t) < 90 + \text{InLeapYear}(t) \\ = 3 & \text{if} & 90 + \text{InLeapYear}(t) & \leq \text{DayWithinYear}(t) < 120 + \text{InLeapYear}(t) \\ = 4 & \text{if} & 120 + \text{InLeapYear}(t) & \leq \text{DayWithinYear}(t) < 151 + \text{InLeapYear}(t) \\ = 5 & \text{if} & 151 + \text{InLeapYear}(t) & \leq \text{DayWithinYear}(t) < 181 + \text{InLeapYear}(t) \\ = 6 & \text{if} & 181 + \text{InLeapYear}(t) & \leq \text{DayWithinYear}(t) < 212 + \text{InLeapYear}(t) \\ = 7 & \text{if} & 212 + \text{InLeapYear}(t) & \leq \text{DayWithinYear}(t) < 243 + \text{InLeapYear}(t) \\ = 8 & \text{if} & 243 + \text{InLeapYear}(t) & \leq \text{DayWithinYear}(t) < 273 + \text{InLeapYear}(t) \\ = 9 & \text{if} & 273 + \text{InLeapYear}(t) & \leq \text{DayWithinYear}(t) < 304 + \text{InLeapYear}(t) \\ = 10 & \text{if} & 304 + \text{InLeapYear}(t) & \leq \text{DayWithinYear}(t) < 334 + \text{InLeapYear}(t) \\ = 11 & \text{if} & 334 + \text{InLeapYear}(t) & \leq \text{DayWithinYear}(t) < 365 + \text{InLeapYear}(t) \end{array}$$

where

$$\text{DayWithinYear}(t) = \text{Day}(t) - \text{DayFromYear}(\text{YearFromTime}(t))$$

A month value of 0 specifies January; 1 specifies February; 2 specifies March; 3 specifies April; 4 specifies May; 5 specifies June; 6 specifies July; 7 specifies August; 8 specifies September; 9 specifies October; 10 specifies November; and 11 specifies December. Note that `MonthFromTime(0) = 0`, corresponding to Thursday, 01 January, 1970.

15.9.1.5 Date Number

A date number is identified by an integer in the range 1 through 31, inclusive. The mapping `DateFromTime(t)` from a time value t to a month number is defined by:

<code>DateFromTime(t)</code>	<code>= DayWithinYear(t)+1</code>	if <code>MonthFromTime(t)=0</code>
	<code>= DayWithinYear(t)-30</code>	if <code>MonthFromTime(t)=1</code>
	<code>= DayWithinYear(t)-58-InLeapYear(t)</code>	if <code>MonthFromTime(t)=2</code>
	<code>= DayWithinYear(t)-89-InLeapYear(t)</code>	if <code>MonthFromTime(t)=3</code>
	<code>= DayWithinYear(t)-119-InLeapYear(t)</code>	if <code>MonthFromTime(t)=4</code>
	<code>= DayWithinYear(t)-150-InLeapYear(t)</code>	if <code>MonthFromTime(t)=5</code>
	<code>= DayWithinYear(t)-180-InLeapYear(t)</code>	if <code>MonthFromTime(t)=6</code>
	<code>= DayWithinYear(t)-211-InLeapYear(t)</code>	if <code>MonthFromTime(t)=7</code>
	<code>= DayWithinYear(t)-242-InLeapYear(t)</code>	if <code>MonthFromTime(t)=8</code>
	<code>= DayWithinYear(t)-272-InLeapYear(t)</code>	if <code>MonthFromTime(t)=9</code>
	<code>= DayWithinYear(t)-303-InLeapYear(t)</code>	if <code>MonthFromTime(t)=10</code>
	<code>= DayWithinYear(t)-333-InLeapYear(t)</code>	if <code>MonthFromTime(t)=11</code>

15.9.1.6 Week Day

The weekday for a particular time value t is defined as

$$\text{WeekDay}(t) = (\text{Day}(t) + 4) \text{ modulo } 7$$

A weekday value of 0 specifies Sunday; 1 specifies Monday; 2 specifies Tuesday; 3 specifies Wednesday; 4 specifies Thursday; 5 specifies Friday; and 6 specifies Saturday. Note that `WeekDay(0) = 4`, corresponding to Thursday, 01 January, 1970.

15.9.1.7 Local Time Zone Adjustment

An implementation of ECMAScript is expected to determine the local time zone adjustment. The local time zone adjustment is a value `LocalTZA` measured in milliseconds which when added to UTC represents the local *standard* time. Daylight saving time is *not* reflected by `LocalTZA`. The value `LocalTZA` does not vary with time but depends only on the geographic location.

Deleted: 8

15.9.1.8 Daylight Saving Time Adjustment

An implementation of ECMAScript is expected to determine the daylight saving time algorithm. The algorithm to determine the daylight saving time adjustment `DaylightSavingTA(t)`, measured in milliseconds, must depend only on four things:

- (1) the time since the beginning of the year
 $t - \text{TimeFromYear}(\text{YearFromTime}(t))$
- (2) whether t is in a leap year
`InLeapYear(t)`
- (3) the week day of the beginning of the year
`WeekDay(TimeFromYear(YearFromTime(t)))`

and (4) the geographic location.

The implementation of ECMAScript should not try to determine whether the exact time was subject to daylight saving time, but just whether daylight saving time would have been in effect if the current daylight saving time algorithm had been used at the time. This avoids complications such as taking into account the years that the locale observed daylight saving time year round.

If the host environment provides functionality for determining daylight saving time, the implementation of ECMAScript is free to map the year in question to an equivalent year (same leap-year-ness and same starting week day for the year) for which the host environment provides daylight

Deleted: 9

saving time information. The only restriction is that all equivalent years should produce the same result.

15.9.1.9 Local Time

Conversion from UTC to local time is defined by

$$\text{LocalTime}(t) = t + \text{LocalTZA} + \text{DaylightSavingTA}(t)$$

Conversion from local time to UTC is defined by

$$\text{UTC}(t) = t - \text{LocalTZA} - \text{DaylightSavingTA}(t - \text{LocalTZA})$$

Note that $\text{UTC}(\text{LocalTime}(t))$ is not necessarily always equal to t .

15.9.1.10 Hours, Minutes, Second, and Milliseconds

The following functions are useful in decomposing time values:

$$\text{HourFromTime}(t) = \text{floor}(t / \text{msPerHour}) \text{ modulo } \text{HoursPerDay}$$

$$\text{MinFromTime}(t) = \text{floor}(t / \text{msPerMinute}) \text{ modulo } \text{MinutesPerHour}$$

$$\text{SecFromTime}(t) = \text{floor}(t / \text{msPerSecond}) \text{ modulo } \text{SecondsPerMinute}$$

$$\text{msFromTime}(t) = t \text{ modulo } \text{msPerSecond}$$

where

$$\text{HoursPerDay} = 24$$

$$\text{MinutesPerHour} = 60$$

$$\text{SecondsPerMinute} = 60$$

$$\text{msPerSecond} = 1000$$

$$\text{msPerMinute} = \text{msPerSecond} \times \text{SecondsPerMinute} = 60000$$

$$\text{msPerHour} = \text{msPerMinute} \times \text{MinutesPerHour} = 3600000$$

15.9.1.11 MakeTime (hour, min, sec, ms)

The operator `MakeTime` calculates a number of milliseconds from its four arguments, which must be ECMAScript number values. This operator functions as follows:

1. If *hour* is not finite or *min* is not finite or *sec* is not finite or *ms* is not finite, return **NaN**.
2. Call `ToInteger(hour)`.
3. Call `ToInteger(min)`.
4. Call `ToInteger(sec)`.
5. Call `ToInteger(ms)`.
6. Compute $\text{Result}(2) * \text{msPerHour} + \text{Result}(3) * \text{msPerMinute} + \text{Result}(4) * \text{msPerSecond} + \text{Result}(5)$, performing the arithmetic according to IEEE 754 rules (that is, as if using the ECMAScript operators `*` and `+`).
7. Return `Result(6)`.

15.9.1.12 MakeDay (year, month, date)

The operator `MakeDay` calculates a number of days from its three arguments, which must be ECMAScript number values. This operator functions as follows:

1. If *year* is not finite or *month* is not finite or *date* is not finite, return **NaN**.
2. Call `ToInteger(year)`.
3. Call `ToInteger(month)`.
4. Call `ToInteger(date)`.
5. Compute $\text{Result}(2) + \text{floor}(\text{Result}(3)/12)$.
6. Compute $\text{Result}(3) \text{ modulo } 12$.
7. Find a value t such that $\text{YearFromTime}(t) == \text{Result}(5)$ and $\text{MonthFromTime}(t) == \text{Result}(6)$ and $\text{DateFromTime}(t) == 1$; but if this is not possible (because some argument is out of range), return **NaN**.
8. Compute $\text{Day}(\text{Result}(7)) + \text{Result}(4) - 1$.

9. Return Result(8).

15.9.1.13 MakeDate (day, time)

The operator MakeDate calculates a number of milliseconds from its two arguments, which must be ECMAScript number values. This operator functions as follows:

1. If *day* is not finite or *time* is not finite, return NaN.
2. Compute $day \times \text{msPerDay} + time$.
3. Return Result(2).

15.9.1.14 TimeClip (time)

The operator TimeClip calculates a number of milliseconds from its argument, which must be an ECMAScript number value. This operator functions as follows:

1. If *time* is not finite, return NaN.
2. If $\text{abs}(\text{Result}(1)) > 8.64 \times 10^{15}$, return NaN.
3. Return an implementation-dependent choice of either ToInteger(Result(2)) or ToInteger(Result(2)) + (+0).
(Adding a positive zero converts -0 to +0.)

NOTE

The point of step 3 is that an implementation is permitted a choice of internal representations of time values, for example as a 64-bit signed integer or as a 64-bit floating-point value. Depending on the implementation, this internal representation may or may not distinguish -0 and +0.

15.9.1.15 Date Time string format

The Simplified ISO 8601 format is as follows: **YYYY-MM-DDTHH:mm:ss.sssTZ**

Where the fields are as follows:

YYYY is the year in the Gregorian calendar

MM is the month of the year between 01 (January) and 12 (December)

DD is the day of the month between 01 and 31.

The "T" appears literally in the string, to indicate the beginning of the time element, as specified in ISO 8601.

HH is the number of complete hours that have passed since midnight

mm is the number of complete minutes since the start of the hour

ss is the number of complete seconds since the start of the minute

The '.', (dot)

sss is the number of complete milliseconds since the start of the second.

Both the '.', and the milliseconds field are optional

TZ is the timezone specified as **Z** (for UTC) or either + or - followed by a time expression

HH:MM

Extended years

ECMAScript requires the ability to specify 6 digit years (extended years): approximately 285,616 years, either forward or backward, from 01 January, 1970 UTC. To represent years before 0 or after 9999, ISO 8601 permits the expansion of the year representation, but only by prior agreement between the sender and the receiver. In the simplified ECMAScript format such an expanded year representation shall have 2 extra year digits and is always prefixed with a + or - sign with the convention that year 0 is positive.

NOTE

This format includes date-only forms:

YYYY

YYYY-MM

YYYY-MM-DD

Time-only forms with an optional time zone appended:

THH:mm
THH:mm:ss
THH:mm:ss.sss

It also includes "date-times" which could be any combination of the above.

All numbers must be base 10.

Illegal values (out-of-bounds as well as syntax errors) in a format string means that the format string is not a valid instance of this format.

As every day both starts and ends with midnight, the two notations 00:00 and 24:00 are available to distinguish the two midnights that can be associated with one date. This means that the following two notations refer to exactly the same point in time: 1995-02-04T24:00 and 1995-02-05T00:00

There exists no international standard that specifies abbreviations for civil time zones like CET, EST, etc. and sometimes the same abbreviation is even used for two very different time zones. For this reason, ISO 8601 and this format specifies numeric representations of date and time.

15.9.2 The Date Constructor Called as a Function

When **Date** is called as a function rather than as a constructor, it returns a string representing the current time (UTC).

NOTE

*The function call **Date (...)** is not equivalent to the object creation expression **new Date (...)** with the same arguments.*

15.9.2.1 **Date ([year [, month [, date [, hours [, minutes [, seconds [, ms]]]]]]])**

All of the arguments are optional; any arguments supplied are accepted but are completely ignored. A string is created and returned as if by the expression **(new Date()) . toString()** where **Date** is the standard built-in constructor with that name and **toString** is the standard built-in method **Date.prototype.toString**.

15.9.3 The Date Constructor

When **Date** is called as part of a **new** expression, it is a constructor: it initialises the newly created object.

15.9.3.1 **new Date (year, month [, date [, hours [, minutes [, seconds [, ms]]]]])**

When **Date** is called with two to seven arguments, it computes the date from *year*, *month*, and (optionally) *date*, *hours*, *minutes*, *seconds* and *ms*.

The `[[Prototype]]` property of the newly constructed object is set to the original Date prototype object, the one that is the initial value of **Date.prototype** (15.9.4.1).

The `[[Class]]` property of the newly constructed object is set to "**Date**".

The `[[Extensible]]` property of the newly constructed object is set to **true**.

The `[[PrimitiveValue]]` property of the newly constructed object is set as follows:

1. Call **ToNumber**(*year*).
2. Call **ToNumber**(*month*).
3. If *date* is supplied use **ToNumber**(*date*); else use **1**.
4. If *hours* is supplied use **ToNumber**(*hours*); else use **0**.
5. If *minutes* is supplied use **ToNumber**(*minutes*); else use **0**.
6. If *seconds* is supplied use **ToNumber**(*seconds*); else use **0**.
7. If *ms* is supplied use **ToNumber**(*ms*); else use **0**.
8. If **Result**(1) is not **NaN** and $0 \leq \text{ToInteger}(\text{Result}(1)) \leq 99$, **Result**(8) is $1900 + \text{ToInteger}(\text{Result}(1))$; otherwise, **Result**(8) is **Result**(1).
9. Compute **MakeDay**(**Result**(8), **Result**(2), **Result**(3)).
10. Compute **MakeTime**(**Result**(4), **Result**(5), **Result**(6), **Result**(7)).
11. Compute **MakeDate**(**Result**(9), **Result**(10)).

12. Set the `[[PrimitiveValue]]` property of the newly constructed object to `TimeClip(UTC(Result(1)))`.

15.9.3.2 **new Date (value)**

The `[[Prototype]]` property of the newly constructed object is set to the original Date prototype object, the one that is the initial value of `Date.prototype` (15.9.4.1).

The `[[Class]]` property of the newly constructed object is set to `"Date"`.

The `[[Extensible]]` property of the newly constructed object is set to `true`.

The `[[PrimitiveValue]]` property of the newly constructed object is set as follows:

1. Call `ToPrimitive(value)`.
2. If `Type(Result(1))` is `String`, then go to step 5.
3. Let V be `ToNumber(Result(1))`.
4. Set the `[[PrimitiveValue]]` property of the newly constructed object to `TimeClip(V)` and return.
5. Parse `Result(1)` as a date, in exactly the same manner as for the `parse` method (15.9.4.2); let V be the time value for this date.
6. Go to step 4.

15.9.3.3 **new Date ()**

The `[[Prototype]]` property of the newly constructed object is set to the original Date prototype object, the one that is the initial value of `Date.prototype` (15.9.4.1).

The `[[Class]]` property of the newly constructed object is set to `"Date"`.

The `[[Extensible]]` property of the newly constructed object is set to `true`.

The `[[PrimitiveValue]]` property of the newly constructed object is set to the current time (UTC).

15.9.4 **Properties of the Date Constructor**

The value of the internal `[[Prototype]]` property of the Date constructor is the Function prototype object (15.3.4).

Besides the internal properties and the `length` property (whose value is 7), the Date constructor has the following properties:

15.9.4.1 **Date.prototype**

The initial value of `Date.prototype` is the built-in Date prototype object (15.9.5).

This property has the attributes { `[[Writable]]: false`, `[[Enumerable]]: false`, `[[Configurable]]: false` }.

Deleted: DontEnum, DontDelete, ReadOnly

15.9.4.2 **Date.parse (string)**

The `parse` function applies the `ToString` operator to its argument and interprets the resulting string as a date; it returns a number, the UTC time value corresponding to the date. The string may be interpreted as a local time, a UTC time, or a time in some other time zone, depending on the contents of the string. The function first attempts to parse the format of the string according to the rules called out in Date Time String Format (15.9.1.15). If the string does not conform to that format the function may fall back to any implementation-specific heuristics or implementation-specific date formats. Unrecognizable strings or dates containing illegal element values in the format string shall cause `Date.parse` to return `NaN`.

If x is any Date object whose milliseconds amount is zero within a particular implementation of ECMAScript, then all of the following expressions should produce the same numeric value in that implementation, if all the properties referenced have their initial values:

`x.valueOf()`

`Date.parse(x.toString())`

`Date.parse(x.toUTCString())`

However, the expression

`Date.parse(x.toLocaleString())`

is not required to produce the same number value as the preceding three expressions and, in general, the value produced by `Date.parse` is implementation-dependent when given any string value that could not be produced in that implementation by the `toString` or `toUTCString` method.

15.9.4.3 Date.UTC (year, month [, date [, hours [, minutes [, seconds [, ms]]]]])

When the `UTC` function is called with fewer than two arguments, the behaviour is implementation-dependent. When the `UTC` function is called with two to seven arguments, it computes the date from *year*, *month* and (optionally) *date*, *hours*, *minutes*, *seconds* and *ms*. The following steps are taken:

1. Call `ToNumber(year)`.
2. Call `ToNumber(month)`.
3. If *date* is supplied use `ToNumber(date)`; else use `1`.
4. If *hours* is supplied use `ToNumber(hours)`; else use `0`.
5. If *minutes* is supplied use `ToNumber(minutes)`; else use `0`.
6. If *seconds* is supplied use `ToNumber(seconds)`; else use `0`.
7. If *ms* is supplied use `ToNumber(ms)`; else use `0`.
8. If `Result(1)` is not `NaN` and $0 \leq \text{ToInteger}(\text{Result}(1)) \leq 99$, `Result(8)` is $1900 + \text{ToInteger}(\text{Result}(1))$; otherwise, `Result(8)` is `Result(1)`.
9. Compute `MakeDay(Result(8), Result(2), Result(3))`.
10. Compute `MakeTime(Result(4), Result(5), Result(6), Result(7))`.
11. Return `TimeClip(MakeDate(Result(9), Result(10)))`.

The `length` property of the `UTC` function is `7`.

NOTE

The `UTC` function differs from the `Date` constructor in two ways: it returns a time value as a number, rather than creating a `Date` object, and it interprets the arguments in UTC rather than as local time.

15.9.4.4 Date.now ()

The `now` method produces the time value at the time of the call.

15.9.5 Properties of the Date Prototype Object

The `Date` prototype object is itself a `Date` object (its `[[Class]]` is `"Date"`) whose `[[PrimitiveValue]]` is `NaN`.

The value of the internal `[[Prototype]]` property of the `Date` prototype object is the [standard built-in Object](#) prototype object ([15.2.4](#)).

In following descriptions of functions that are properties of the `Date` prototype object, the phrase “this `Date` object” refers to the object that is the `this` value for the invocation of the function. None of these functions are generic; a `TypeError` exception is thrown if the `this` value is not an object for which the value of the internal `[[Class]]` property is `"Date"`. Also, the phrase “this time value” refers to the number value for the time represented by this `Date` object, that is, the value of the internal `[[PrimitiveValue]]` property of this `Date` object.

15.9.5.1 Date.prototype.constructor

The initial value of `Date.prototype.constructor` is the built-in `Date` constructor.

15.9.5.2 Date.prototype.toString ()

This function returns a string value. The contents of the string are implementation-dependent, but are intended to represent the `Date` in the current time zone in a convenient, human-readable form.

NOTE

For any `Date` value *d* whose milliseconds amount is zero, the result of `Date.parse(d.toString())` is equal to `d.valueOf()`. See section [15.9.4.2](#).

15.9.5.3 Date.prototype.toDateString ()

This function returns a string value. The contents of the string are implementation-dependent, but are intended to represent the “date” portion of the `Date` in the current time zone in a convenient, human-readable form.

Deleted: value

Deleted: 15.2.3.1

Deleted: NOTE¶
It is intended that for any `Date` value *d*, the result of `Date.prototype.parse(d.toString())` ([15.9.4.2](#)) is equal to *d*.

15.9.5.4 Date.prototype.toString ()

This function returns a string value. The contents of the string are implementation-dependent, but are intended to represent the “time” portion of the Date in the current time zone in a convenient, human-readable form.

15.9.5.5 Date.prototype.toLocaleString ()

This function returns a string value. The contents of the string are implementation-dependent, but are intended to represent the Date in the current time zone in a convenient, human-readable form that corresponds to the conventions of the host environment’s current locale.

NOTE

The first parameter to this function is likely to be used in a future version of this standard; it is recommended that implementations do not use this parameter position for anything else.

15.9.5.6 Date.prototype.toLocaleDateString ()

This function returns a string value. The contents of the string are implementation-dependent, but are intended to represent the “date” portion of the Date in the current time zone in a convenient, human-readable form that corresponds to the conventions of the host environment’s current locale.

NOTE

The first parameter to this function is likely to be used in a future version of this standard; it is recommended that implementations do not use this parameter position for anything else.

15.9.5.7 Date.prototype.toLocaleTimeString ()

This function returns a string value. The contents of the string are implementation-dependent, but are intended to represent the “time” portion of the Date in the current time zone in a convenient, human-readable form that corresponds to the conventions of the host environment’s current locale.

NOTE

The first parameter to this function is likely to be used in a future version of this standard; it is recommended that implementations do not use this parameter position for anything else.

15.9.5.8 Date.prototype.valueOf ()

The **valueOf** function returns a number, which is this time value.

15.9.5.9 Date.prototype.getTime ()

1. If the **this** value is not an object whose **[[Class]]** property is **"Date"**, throw a **TypeError** exception.
2. Return this time value.

15.9.5.10 Date.prototype.getFullYear ()

1. Let *t* be this time value.
2. If *t* is **NaN**, return **NaN**.
3. Return **YearFromTime(LocalTime(*t*))**.

15.9.5.11 Date.prototype.getUTCFullYear ()

1. Let *t* be this time value.
2. If *t* is **NaN**, return **NaN**.
3. Return **YearFromTime(*t*)**.

15.9.5.12 Date.prototype.getMonth ()

1. Let *t* be this time value.
2. If *t* is **NaN**, return **NaN**.
3. Return **MonthFromTime(LocalTime(*t*))**.

15.9.5.13 Date.prototype.getUTCMonth ()

1. Let *t* be this time value.
2. If *t* is **NaN**, return **NaN**.
3. Return **MonthFromTime(*t*)**.

- 15.9.5.14 Date.prototype.getDate ()**
1. Let *t* be this time value.
 2. If *t* is **NaN**, return **NaN**.
 3. Return `DateFromTime(LocalTime(t))`.
- 15.9.5.15 Date.prototype.getUTCDate ()**
1. Let *t* be this time value.
 2. If *t* is **NaN**, return **NaN**.
 3. Return `DateFromTime(t)`.
- 15.9.5.16 Date.prototype.getDay ()**
1. Let *t* be this time value.
 2. If *t* is **NaN**, return **NaN**.
 3. Return `WeekDay(LocalTime(t))`.
- 15.9.5.17 Date.prototype.getUTCDay ()**
1. Let *t* be this time value.
 2. If *t* is **NaN**, return **NaN**.
 3. Return `WeekDay(t)`.
- 15.9.5.18 Date.prototype.getHours ()**
1. Let *t* be this time value.
 2. If *t* is **NaN**, return **NaN**.
 3. Return `HourFromTime(LocalTime(t))`.
- 15.9.5.19 Date.prototype.getUTCHours ()**
1. Let *t* be this time value.
 2. If *t* is **NaN**, return **NaN**.
 3. Return `HourFromTime(t)`.
- 15.9.5.20 Date.prototype.getMinutes ()**
1. Let *t* be this time value.
 2. If *t* is **NaN**, return **NaN**.
 3. Return `MinFromTime(LocalTime(t))`.
- 15.9.5.21 Date.prototype.getUTCMinutes ()**
1. Let *t* be this time value.
 2. If *t* is **NaN**, return **NaN**.
 3. Return `MinFromTime(t)`.
- 15.9.5.22 Date.prototype.getSeconds ()**
1. Let *t* be this time value.
 2. If *t* is **NaN**, return **NaN**.
 3. Return `SecFromTime(LocalTime(t))`.
- 15.9.5.23 Date.prototype.getUTCSeconds ()**
1. Let *t* be this time value.
 2. If *t* is **NaN**, return **NaN**.
 3. Return `SecFromTime(t)`.
- 15.9.5.24 Date.prototype.getMilliseconds ()**
1. Let *t* be this time value.
 2. If *t* is **NaN**, return **NaN**.
 3. Return `msFromTime(LocalTime(t))`.

15.9.5.25 Date.prototype.getUTCMilliseconds ()

1. Let *t* be this time value.
2. If *t* is NaN, return NaN.
3. Return msFromTime(*t*).

15.9.5.26 Date.prototype.getTimezoneOffset ()

Returns the difference between local time and UTC time in minutes.

1. Let *t* be this time value.
2. If *t* is NaN, return NaN.
3. Return (*t* – LocalTime(*t*)) / msPerMinute.

15.9.5.27 Date.prototype.setTime (time)

1. If the **this** value is not a Date object, throw a **TypeError** exception.
2. Call ToNumber(*time*).
3. Call TimeClip(Result(1)).
4. Set the [[PrimitiveValue]] property of the **this** value to Result(2).
5. Return the value of the [[PrimitiveValue]] property of the **this** value.

15.9.5.28 Date.prototype.setMilliseconds (ms)

1. Let *t* be the result of LocalTime(this time value).
2. Call ToNumber(*ms*).
3. Compute MakeTime(HourFromTime(*t*), MinFromTime(*t*), SecFromTime(*t*), Result(2)).
4. Compute UTC(MakeDate(Day(*t*), Result(3))).
5. Set the [[PrimitiveValue]] property of the **this** value to TimeClip(Result(4)).
6. Return the value of the [[PrimitiveValue]] property of the **this** value.

15.9.5.29 Date.prototype.setUTCMilliseconds (ms)

1. Let *t* be this time value.
2. Call ToNumber(*ms*).
3. Compute MakeTime(HourFromTime(*t*), MinFromTime(*t*), SecFromTime(*t*), Result(2)).
4. Compute MakeDate(Day(*t*), Result(3)).
5. Set the [[PrimitiveValue]] property of the **this** value to TimeClip(Result(4)).
6. Return the value of the [[PrimitiveValue]] property of the **this** value.

15.9.5.30 Date.prototype.setSeconds (sec [, ms])

If *ms* is not specified, this behaves as if *ms* were specified with the value getMilliseconds().

1. Let *t* be the result of LocalTime(this time value).
2. Call ToNumber(*sec*).
3. If *ms* is not specified, compute msFromTime(*t*); otherwise, call ToNumber(*ms*).
4. Compute MakeTime(HourFromTime(*t*), MinFromTime(*t*), Result(2), Result(3)).
5. Compute UTC(MakeDate(Day(*t*), Result(4))).
6. Set the [[PrimitiveValue]] property of the **this** value to TimeClip(Result(5)).
7. Return the value of the [[PrimitiveValue]] property of the **this** value.

The **length** property of the **setSeconds** method is 2.

15.9.5.31 Date.prototype.setUTCSeconds (sec [, ms])

If *ms* is not specified, this behaves as if *ms* were specified with the value getUTCMilliseconds().

1. Let *t* be this time value.
2. Call ToNumber(*sec*).
3. If *ms* is not specified, compute msFromTime(*t*); otherwise, call ToNumber(*ms*).
4. Compute MakeTime(HourFromTime(*t*), MinFromTime(*t*), Result(2), Result(3)).
5. Compute MakeDate(Day(*t*), Result(4)).
6. Set the [[PrimitiveValue]] property of the **this** value to TimeClip(Result(5)).
7. Return the value of the [[PrimitiveValue]] property of the **this** value.

The **length** property of the **setUTCSeconds** method is 2.

15.9.5.33 Date.prototype.setMinutes (min [, sec [, ms]])

If *sec* is not specified, this behaves as if *sec* were specified with the value `getSeconds()`.

If *ms* is not specified, this behaves as if *ms* were specified with the value `getMilliseconds()`.

1. Let *t* be the result of `LocalTime(this time value)`.
2. Call `ToNumber(min)`.
3. If *sec* is not specified, compute `SecFromTime(t)`; otherwise, call `ToNumber(sec)`.
4. If *ms* is not specified, compute `msFromTime(t)`; otherwise, call `ToNumber(ms)`.
5. Compute `MakeTime(HourFromTime(t), Result(2), Result(3), Result(4))`.
6. Compute `UTC(MakeDate(Day(t), Result(5)))`.
7. Set the `[[PrimitiveValue]]` property of the **this** value to `TimeClip(Result(6))`.
8. Return the value of the `[[PrimitiveValue]]` property of the **this** value.

The **length** property of the **setMinutes** method is 3.

15.9.5.34 Date.prototype.setUTCMinutes (min [, sec [, ms]])

If *sec* is not specified, this behaves as if *sec* were specified with the value `getUTCSeconds()`.

If *ms* is not specified, this behaves as if *ms* were specified with the value `getUTCMilliseconds()`.

1. Let *t* be this time value.
2. Call `ToNumber(min)`.
3. If *sec* is not specified, compute `SecFromTime(t)`; otherwise, call `ToNumber(sec)`.
4. If *ms* is not specified, compute `msFromTime(t)`; otherwise, call `ToNumber(ms)`.
5. Compute `MakeTime(HourFromTime(t), Result(2), Result(3), Result(4))`.
6. Compute `MakeDate(Day(t), Result(5))`.
7. Set the `[[PrimitiveValue]]` property of the **this** value to `TimeClip(Result(6))`.
8. Return the value of the `[[PrimitiveValue]]` property of the **this** value.

The **length** property of the **setUTCMinutes** method is 3.

15.9.5.35 Date.prototype.setHours (hour [, min [, sec [, ms]]])

If *min* is not specified, this behaves as if *min* were specified with the value `getMinutes()`.

If *sec* is not specified, this behaves as if *sec* were specified with the value `getSeconds()`.

If *ms* is not specified, this behaves as if *ms* were specified with the value `getMilliseconds()`.

1. Let *t* be the result of `LocalTime(this time value)`.
2. Call `ToNumber(hour)`.
3. If *min* is not specified, compute `MinFromTime(t)`; otherwise, call `ToNumber(min)`.
4. If *sec* is not specified, compute `SecFromTime(t)`; otherwise, call `ToNumber(sec)`.
5. If *ms* is not specified, compute `msFromTime(t)`; otherwise, call `ToNumber(ms)`.
6. Compute `MakeTime(Result(2), Result(3), Result(4), Result(5))`.
7. Compute `UTC(MakeDate(Day(t), Result(6)))`.
8. Set the `[[PrimitiveValue]]` property of the **this** value to `TimeClip(Result(7))`.
9. Return the value of the `[[PrimitiveValue]]` property of the **this** value.

The **length** property of the **setHours** method is 4.

15.9.5.36 Date.prototype.setUTCHours (hour [, min [, sec [, ms]]])

If *min* is not specified, this behaves as if *min* were specified with the value `getUTCMinutes()`.

If *sec* is not specified, this behaves as if *sec* were specified with the value `getUTCSeconds()`.

If *ms* is not specified, this behaves as if *ms* were specified with the value `getUTCMilliseconds()`.

1. Let *t* be this time value.
2. Call `ToNumber(hour)`.
3. If *min* is not specified, compute `MinFromTime(t)`; otherwise, call `ToNumber(min)`.
4. If *sec* is not specified, compute `SecFromTime(t)`; otherwise, call `ToNumber(sec)`.

5. If *ms* is not specified, compute `msFromTime(t)`; otherwise, call `ToNumber(ms)`.
6. Compute `MakeTime(Result(2), Result(3), Result(4), Result(5))`.
7. Compute `MakeDate(Day(t), Result(6))`.
8. Set the `[[PrimitiveValue]]` property of the **this** value to `TimeClip(Result(7))`.
9. Return the value of the `[[PrimitiveValue]]` property of the **this** value.

The **length** property of the **setUTCHours** method is 4.

15.9.5.36 Date.prototype.setDate (date)

1. Let *t* be the result of `LocalTime(this time value)`.
2. Call `ToNumber(date)`.
3. Compute `MakeDay(YearFromTime(t), MonthFromTime(t), Result(2))`.
4. Compute `UTC(MakeDate(Result(3), TimeWithinDay(t)))`.
5. Set the `[[PrimitiveValue]]` property of the **this** value to `TimeClip(Result(4))`.
6. Return the value of the `[[PrimitiveValue]]` property of the **this** value.

15.9.5.37 Date.prototype.setUTCDate (date)

1. Let *t* be this time value.
2. Call `ToNumber(date)`.
3. Compute `MakeDay(YearFromTime(t), MonthFromTime(t), Result(2))`.
4. Compute `MakeDate(Result(3), TimeWithinDay(t))`.
5. Set the `[[PrimitiveValue]]` property of the **this** value to `TimeClip(Result(4))`.
6. Return the value of the `[[PrimitiveValue]]` property of the **this** value.

15.9.5.38 Date.prototype.setMonth (month [, date])

If *date* is not specified, this behaves as if *date* were specified with the value `getDate()`.

1. Let *t* be the result of `LocalTime(this time value)`.
2. Call `ToNumber(month)`.
3. If *date* is not specified, compute `DateFromTime(t)`; otherwise, call `ToNumber(date)`.
4. Compute `MakeDay(YearFromTime(t), Result(2), Result(3))`.
5. Compute `UTC(MakeDate(Result(4), TimeWithinDay(t)))`.
6. Set the `[[PrimitiveValue]]` property of the **this** value to `TimeClip(Result(5))`.
7. Return the value of the `[[PrimitiveValue]]` property of the **this** value.

The **length** property of the **setMonth** method is 2.

15.9.5.39 Date.prototype.setUTCMonth (month [, date])

If *date* is not specified, this behaves as if *date* were specified with the value `getUTCDate()`.

1. Let *t* be this time value.
2. Call `ToNumber(month)`.
3. If *date* is not specified, compute `DateFromTime(t)`; otherwise, call `ToNumber(date)`.
4. Compute `MakeDay(YearFromTime(t), Result(2), Result(3))`.
5. Compute `MakeDate(Result(4), TimeWithinDay(t))`.
6. Set the `[[PrimitiveValue]]` property of the **this** value to `TimeClip(Result(5))`.
7. Return the value of the `[[PrimitiveValue]]` property of the **this** value.

The **length** property of the **setUTCMonth** method is 2.

15.9.5.40 Date.prototype.setFullYear (year [, month [, date]])

If *month* is not specified, this behaves as if *month* were specified with the value `getMonth()`.

If *date* is not specified, this behaves as if *date* were specified with the value `getDate()`.

1. Let *t* be the result of `LocalTime(this time value)`; but if this time value is **NaN**, let *t* be **+0**.
2. Call `ToNumber(year)`.
3. If *month* is not specified, compute `MonthFromTime(t)`; otherwise, call `ToNumber(month)`.
4. If *date* is not specified, compute `DateFromTime(t)`; otherwise, call `ToNumber(date)`.
5. Compute `MakeDay(Result(2), Result(3), Result(4))`.
6. Compute `UTC(MakeDate(Result(5), TimeWithinDay(t)))`.

7. Set the `[[PrimitiveValue]]` property of the `this` value to `TimeClip(Result(6))`.
8. Return the value of the `[[PrimitiveValue]]` property of the `this` value.

The `length` property of the `setFullYear` method is 3.

15.9.5.41 `Date.prototype.setUTCFullYear (year [, month [, date]])`

If `month` is not specified, this behaves as if `month` were specified with the value `getUTCMonth()`.

If `date` is not specified, this behaves as if `date` were specified with the value `getUTCDate()`.

1. Let `t` be this time value; but if this time value is `NaN`, let `t` be `+0`.
2. Call `ToNumber(year)`.
3. If `month` is not specified, compute `MonthFromTime(t)`; otherwise, call `ToNumber(month)`.
4. If `date` is not specified, compute `DateFromTime(t)`; otherwise, call `ToNumber(date)`.
5. Compute `MakeDay(Result(2), Result(3), Result(4))`.
6. Compute `MakeDate(Result(5), TimeWithinDay(t))`.
7. Set the `[[PrimitiveValue]]` property of the `this` value to `TimeClip(Result(6))`.
8. Return the value of the `[[PrimitiveValue]]` property of the `this` value.

The `length` property of the `setUTCFullYear` method is 3.

15.9.5.42 `Date.prototype.toUTCString ()`

This function returns a string value. The contents of the string are implementation-dependent, but are intended to represent the Date in a convenient, human-readable form in UTC.

NOTE

The intent is to produce a string representation of a date that is more readable than the format specified in Section 15.9.1.15. It is not essential that the chosen format be unambiguous or easily machine parsable. If an implementation does not have a preferred human-readable format it is recommended to use the format called out in Section 15.9.1.15 but with a space rather than a "T" used to separate the date and time elements.

Deleted: readable

15.9.5.43 `Date.prototype.toISOString ()`

This function returns a string value represent the instance in time represented by this Date object. The format of the string is as called out in Date Time string format (15.9.1.15). All fields are present in the string. The time zone is always UTC, denoted by the suffix `Z`.

15.9.5.44 `Date.prototype.toJSON (key)`

This function returns the same string as `Date.prototype.toISOString()`.

When the `toJSON` method is called with argument `key`, the following steps are taken:

1. Let `O` be this object.
2. Call the `[[Get]]` method of `O` with argument `"toISOString"`.
3. If `IsCallable(Result(2))` is false, go to step 6.
4. Call the `[[Call]]` method of `Result(2)` with `O` as the `this` value and an empty argument list.
5. If `Result(4)` is a primitive value, return `Result(4)`.
6. Throw a `TypeError` exception.

NOTE

The `toJSON` function is intentionally generic; it does not require that its `this` value be a Date object. Therefore, it can be transferred to other kinds of objects for use as a method. An object is free to use the argument `'key'` that is passed in to filter its stringification.

15.9.6 Properties of Date Instances

Date instances have no special properties beyond those inherited from the Date prototype object.

15.10 RegExp (Regular Expression) Objects

A `RegExp` object contains a regular expression and the associated flags.

NOTE

The form and functionality of regular expressions is modelled after the regular expression facility in the Perl 5 programming language.

15.10.1 Patterns

The **RegExp** constructor applies the following grammar to the input pattern string. An error occurs if the grammar cannot interpret the string as an expansion of *Pattern*.

Syntax

Pattern ::

Disjunction

Disjunction ::

Alternative

Alternative | *Disjunction*

Alternative ::

[empty]

Alternative Term

Term ::

Assertion

Atom

Atom Quantifier

Assertion ::

\wedge

$\$$

$\backslash \mathbf{b}$

$\backslash \mathbf{B}$

(? = *Disjunction*)

(? ! *Disjunction*)

Quantifier ::

QuantifierPrefix

QuantifierPrefix ?

QuantifierPrefix ::

*

+

?

{ *DecimalDigits* }

{ *DecimalDigits* , }

{ *DecimalDigits* , *DecimalDigits* }

Atom ::

PatternCharacter

.

\backslash *AtomEscape*

CharacterClass

(*Disjunction*)

(? : *Disjunction*)

PatternCharacter :: *SourceCharacter* but not any of:

\wedge $\$$ \backslash . * + ? () [] { } |

AtomEscape ::

DecimalEscape

CharacterEscape

CharacterClassEscape

Deleted:
(? = *Disjunction*)
(? ! *Disjunction*)

CharacterEscape ::
 ControlEscape
 c *ControlLetter*
 HexEscapeSequence
 UnicodeEscapeSequence
 IdentityEscape

ControlEscape :: **one of**
 f n r t v

ControlLetter :: **one of**
 a b c d e f g h i j k l m n o p q r s t u v w x y z
 A B C D E F G H I J K L M N O P Q R S T U V W X Y Z

IdentityEscape ::
 SourceCharacter **but not** *IdentifierPart*

DecimalEscape ::
 DecimalIntegerLiteral [lookahead \notin *DecimalDigit*]

CharacterClassEscape :: **one of**
 d D s S w W

CharacterClass ::
 [[lookahead \notin {**^**}] *ClassRanges*]
 [**^** *ClassRanges*]

ClassRanges ::
 [empty]
 NonemptyClassRanges

NonemptyClassRanges ::
 ClassAtom
 ClassAtom NonemptyClassRangesNoDash
 ClassAtom - ClassAtom ClassRanges

NonemptyClassRangesNoDash ::
 ClassAtom
 ClassAtomNoDash NonemptyClassRangesNoDash
 ClassAtomNoDash - ClassAtom ClassRanges

ClassAtom ::
 -
 ClassAtomNoDash

ClassAtomNoDash ::
 SourceCharacter **but not one of** \] -
 \ *ClassEscape*

ClassEscape ::
 DecimalEscape
 b
 CharacterEscape
 CharacterClassEscape

15.10.2 Pattern Semantics

A regular expression pattern is converted into an internal [procedure](#) using the process described below. An implementation is encouraged to use more efficient algorithms than the ones listed below, as long as

Deleted: function

the results are the same. The internal procedure is used as the value of a RegExp object's `[[Match]]` internal property.

15.10.2.1 Notation

The descriptions below use the following variables:

Input is the string being matched by the regular expression pattern. The notation *input*[*n*] means the *n*th character of *input*, where *n* can range between 0 (inclusive) and *InputLength* (exclusive).

InputLength is the number of characters in the *Input* string.

NcapturingParens is the total number of left capturing parentheses (i.e. the total number of times the *Atom* :: (*Disjunction*) production is expanded) in the pattern. A left capturing parenthesis is any (pattern character that is matched by the (terminal of the *Atom* :: (*Disjunction*) production.

IgnoreCase is the setting of the RegExp object's `ignoreCase` property.

Multiline is the setting of the RegExp object's `multiline` property.

Furthermore, the descriptions below use the following internal data structures:

A *CharSet* is a mathematical set of characters.

A *State* is an ordered pair (*endIndex*, *captures*) where *endIndex* is an integer and *captures* is an internal array of *NcapturingParens* values. States are used to represent partial match states in the regular expression matching algorithms. The *endIndex* is one plus the index of the last input character matched so far by the pattern, while *captures* holds the results of capturing parentheses. The *n*th element of *captures* is either a string that represents the value obtained by the *n*th set of capturing parentheses or `undefined` if the *n*th set of capturing parentheses hasn't been reached yet. Due to backtracking, many states may be in use at any time during the matching process.

A *MatchResult* is either a *State* or the special token `failure` that indicates that the match failed.

A *Continuation procedure* is an internal closure (i.e. an internal procedure with some arguments already bound to values) that takes one *State* argument and returns a *MatchResult* result. If an internal closure references variables bound in the function that creates the closure, the closure uses the values that these variables had at the time the closure was created. The continuation attempts to match the remaining portion (specified by the closure's already-bound arguments) of the pattern against the input string, starting at the intermediate state given by its *State* argument. If the match succeeds, the continuation returns the final *State* that it reached; if the match fails, the continuation returns `failure`.

A *Matcher procedure* is an internal closure that takes two arguments -- a *State* and a *Continuation* -- and returns a *MatchResult* result. The matcher attempts to match a middle subpattern (specified by the closure's already-bound arguments) of the pattern against the input string, starting at the intermediate state given by its *State* argument. The *Continuation* argument should be a closure that matches the rest of the pattern. After matching the subpattern of a pattern to obtain a new *State*, the matcher then calls *Continuation* on that state to test if the rest of the pattern can match as well. If it can, the matcher returns the state returned by the continuation; if not, the matcher may try different choices at its choice points, repeatedly calling *Continuation* until it either succeeds or all possibilities have been exhausted.

An *AssertionTester procedure* is an internal closure that takes a *State* argument and returns a boolean result. The assertion tester tests a specific condition (specified by the closure's already-bound arguments) against the current place in the input string and returns `true` if the condition matched or `false` if not.

An *EscapeValue* is either a character or an integer. An *EscapeValue* is used to denote the interpretation of a *DecimalEscape* escape sequence: a character *ch* means that the escape sequence is interpreted as the character *ch*, while an integer *n* means that the escape sequence is interpreted as a backreference to the *n*th set of capturing parentheses.

15.10.2.2 Pattern

The production *Pattern* :: *Disjunction* evaluates as follows:

1. Evaluate *Disjunction* to obtain a *Matcher* *m*.
2. Return an internal closure that takes two arguments, a string *str* and an integer *index*, and performs the following:

Deleted: function

Deleted: function

Deleted: function

Deleted: function

1. Let *Input* be the given string *str*. This variable will be used throughout the [algorithms](#) in 15.10.2.
2. Let *InputLength* be the length of *Input*. This variable will be used throughout the [algorithms](#) in 15.10.2.
3. Let *c* be a Continuation that always returns its State argument as a successful MatchResult.
4. Let *cap* be an internal array of *NcapturingParens* **undefined** values, indexed 1 through *NcapturingParens*.
5. Let *x* be the State (*index*, *cap*).
6. Call *m(x, c)* and return its result.

Deleted: functions

Deleted: functions

Informative comments: A *Pattern* evaluates ("compiles") to an internal [procedure](#) value. `RegExp.prototype.exec` can then apply this [procedure](#) to a string and an offset within the string to determine whether the pattern would match starting at exactly that offset within the string, and, if it does match, what the values of the capturing parentheses would be. The algorithms in 15.10.2 are designed so that compiling a pattern may throw a `SyntaxError` exception; on the other hand, once the pattern is successfully compiled, applying its result [internal procedure](#) to find a match in a string cannot throw an exception (except for any host-defined exceptions that can occur anywhere such as out-of-memory).

Deleted: function

Deleted: function

Deleted: function

15.10.2.3 Disjunction

The production `Disjunction :: Alternative` evaluates by evaluating *Alternative* to obtain a Matcher and returning that Matcher.

The production `Disjunction :: Alternative | Disjunction` evaluates as follows:

1. Evaluate *Alternative* to obtain a Matcher *m1*.
2. Evaluate *Disjunction* to obtain a Matcher *m2*.
3. Return an internal Matcher closure that takes two arguments, a State *x* and a Continuation *c*, and performs the following:
 1. Call *m1(x, c)* and let *r* be its result.
 2. If *r* isn't **failure**, return *r*.
 3. Call *m2(x, c)* and return its result.

Informative comments: The `|` regular expression operator separates two alternatives. The pattern first tries to match the left *Alternative* (followed by the sequel of the regular expression); if it fails, it tries to match the right *Disjunction* (followed by the sequel of the regular expression). If the left *Alternative*, the right *Disjunction*, and the sequel all have choice points, all choices in the sequel are tried before moving on to the next choice in the left *Alternative*. If choices in the left *Alternative* are exhausted, the right *Disjunction* is tried instead of the left *Alternative*. Any capturing parentheses inside a portion of the pattern skipped by `|` produce **undefined** values instead of strings. Thus, for example,

```
/a|ab/.exec("abc")
```

returns the result `"a"` and not `"ab"`. Moreover,

```
/((a)|(ab))((c)|(bc))/.exec("abc")
```

returns the array

```
["abc", "a", "a", undefined, "bc", undefined, "bc"]
```

and not

```
["abc", "ab", undefined, "ab", "c", "c", undefined]
```

15.10.2.4 Alternative

The production `Alternative :: [empty]` evaluates by returning a Matcher that takes two arguments, a State *x* and a Continuation *c*, and returns the result of calling *c(x)*.

The production `Alternative :: Alternative Term` evaluates as follows:

1. Evaluate *Alternative* to obtain a Matcher *m1*.
2. Evaluate *Term* to obtain a Matcher *m2*.

3. Return an internal Matcher closure that takes two arguments, a State x and a Continuation c , and performs the following:
 1. Create a Continuation d that takes a State argument y and returns the result of calling $m2(y, c)$.
 2. Call $m1(x, d)$ and return its result.

Informative comments: Consecutive *Terms* try to simultaneously match consecutive portions of the input string. If the left *Alternative*, the right *Term*, and the sequel of the regular expression all have choice points, all choices in the sequel are tried before moving on to the next choice in the right *Term*, and all choices in the right *Term* are tried before moving on to the next choice in the left *Alternative*.

15.10.2.5 Term

The production $Term :: Assertion$ evaluates by returning an internal Matcher closure that takes two arguments, a State x and a Continuation c , and performs the following:

1. Evaluate *Assertion* to obtain an AssertionTester t .
2. Call $t(x)$ and let r be the resulting boolean value.
3. If r is **false**, return **failure**.
4. Call $c(x)$ and return its result.

The production $Term :: Atom$ evaluates by evaluating *Atom* to obtain a Matcher and returning that Matcher.

The production $Term :: Atom Quantifier$ evaluates as follows:

1. Evaluate *Atom* to obtain a Matcher m .
2. Evaluate *Quantifier* to obtain the three results: an integer min , an integer (or ∞) max , and boolean *greedy*.
3. If max is finite and less than min , then throw a **SyntaxError** exception.
4. Let $parenIndex$ be the number of left capturing parentheses in the entire regular expression that occur to the left of this production expansion's *Term*. This is the total number of times the $Atom :: (Disjunction)$ production is expanded prior to this production's *Term* plus the total number of $Atom :: (Disjunction)$ productions enclosing this *Term*.
5. Let $parenCount$ be the number of left capturing parentheses in the expansion of this production's *Atom*. This is the total number of $Atom :: (Disjunction)$ productions enclosed by this production's *Atom*.
6. Return an internal Matcher closure that takes two arguments, a State x and a Continuation c , and performs the following:
 1. Call $RepeatMatcher(m, min, max, greedy, x, c, parenIndex, parenCount)$ and return its result.

The **abstract operation** $RepeatMatcher$ takes eight parameters, a Matcher m , an integer min , an integer (or ∞) max , a boolean *greedy*, a State x , a Continuation c , an integer $parenIndex$, and an integer $parenCount$, and performs the following:

1. If max is zero, then call $c(x)$ and return its result.
2. Create an internal Continuation closure d that takes one State argument y and performs the following:

If min is zero and y 's $endIndex$ is equal to x 's $endIndex$, then return **failure**.
If min is zero then let $min2$ be zero; otherwise let $min2$ be $min-1$.
If max is ∞ , then let $max2$ be ∞ ; otherwise let $max2$ be $max-1$.
Call $RepeatMatcher(m, min2, max2, greedy, y, c, parenIndex, parenCount)$ and return its result.
3. Let cap be a fresh copy of x 's *captures* internal array.
4. For every integer k that satisfies $parenIndex < k$ and $k \leq parenIndex+parenCount$, set $cap[k]$ to **undefined**.
5. Let e be x 's $endIndex$.
6. Let xr be the State (e, cap) .
7. If min is not zero, then call $m(xr, d)$ and return its result.
8. If *greedy* is **true**, then go to step 12.
9. Call $c(x)$ and let z be its result.
10. If z is not **failure**, return z .

Deleted: internal helper function

11. Call $m(xr, d)$ and return its result.
12. Call $m(xr, d)$ and let z be its result.
13. If z is not **failure**, return z .
14. Call $c(x)$ and return its result.

Informative comments: An *Atom* followed by a *Quantifier* is repeated the number of times specified by the *Quantifier*. A quantifier can be non-greedy, in which case the *Atom* pattern is repeated as few times as possible while still matching the sequel, or it can be greedy, in which case the *Atom* pattern is repeated as many times as possible while still matching the sequel. The *Atom* pattern is repeated rather than the input string that it matches, so different repetitions of the *Atom* can match different input substrings.

If the *Atom* and the sequel of the regular expression all have choice points, the *Atom* is first matched as many (or as few, if non-greedy) times as possible. All choices in the sequel are tried before moving on to the next choice in the last repetition of *Atom*. All choices in the last (n^{th}) repetition of *Atom* are tried before moving on to the next choice in the next-to-last ($(n-1)^{\text{st}}$) repetition of *Atom*; at which point it may turn out that more or fewer repetitions of *Atom* are now possible; these are exhausted (again, starting with either as few or as many as possible) before moving on to the next choice in the ($n-1$)st repetition of *Atom* and so on.

Compare

```
/a[a-z]{2,4}/.exec("abcdefghi")
```

which returns "abcde" with

```
/a[a-z]{2,4}?/.exec("abcdefghi")
```

which returns "abc".

Consider also

```
/(aa|aabaac|ba|b|c)*/.exec("aabaac")
```

which, by the choice point ordering above, returns the array

```
["aaba", "ba"]
```

and not any of:

```
["aabaac", "aabaac"]
```

```
["aabaac", "c"]
```

The above ordering of choice points can be used to write a regular expression that calculates the greatest common divisor of two numbers (represented in unary notation). The following example calculates the gcd of 10 and 15:

```
"aaaaaaaaaa,aaaaaaaaaaaaa".replace(/^(a+)\1*\1+$/, "$1")
```

which returns the gcd in unary notation "aaaaa".

Step 4 of the *RepeatMatcher* clears *Atom*'s captures each time *Atom* is repeated. We can see its behaviour in the regular expression

```
/(z)((a)?(b)?(c))*/.exec("zaacbbbcac")
```

which returns the array

```
["zaacbbbcac", "z", "ac", "a", undefined, "c"]
```

and not

```
["zaacbbbcac", "z", "ac", "a", "bbb", "c"]
```

because each iteration of the outermost $*$ clears all captured strings contained in the quantified *Atom*, which in this case includes capture strings numbered 2, 3, and 4.

Step 1 of the *RepeatMatcher*'s closure d states that, once the minimum number of repetitions has been satisfied, any more expansions of *Atom* that match the empty string are not considered for further

repetitions. This prevents the regular expression engine from falling into an infinite loop on patterns such as:

```
/(a*)*/.exec("b")
```

or the slightly more complicated:

```
/(a*)b\1+/.exec("baaaac")
```

which returns the array

```
["b", ""]
```

15.10.2.6 Assertion

The production *Assertion* :: ^ evaluates by returning an internal AssertionTester closure that takes a State argument *x* and performs the following:

1. Let *e* be *x*'s *endIndex*.
2. If *e* is zero, return **true**.
3. If *Multiline* is **false**, return **false**.
4. If the character *Input*[*e*-1] is one of LineTerminator, return **true**.
5. Return **false**.

Deleted: the line terminator characters
<LF>, <CR>, <LS>, or <PS>

The production *Assertion* :: \$ evaluates by returning an internal AssertionTester closure that takes a State argument *x* and performs the following:

1. Let *e* be *x*'s *endIndex*.
2. If *e* is equal to *InputLength*, return **true**.
3. If *Multiline* is **false**, return **false**.
4. If the character *Input*[*e*] is one of LineTerminator, return **true**.
5. Return **false**.

Deleted: the line terminator characters
<LF>, <CR>, <LS>, or <PS>

The production *Assertion* :: \ b evaluates by returning an internal AssertionTester closure that takes a State argument *x* and performs the following:

1. Let *e* be *x*'s *endIndex*.
2. Call *IsWordChar*(*e*-1) and let *a* be the boolean result.
3. Call *IsWordChar*(*e*) and let *b* be the boolean result.
4. If *a* is **true** and *b* is **false**, return **true**.
5. If *a* is **false** and *b* is **true**, return **true**.
6. Return **false**.

The production *Assertion* :: \ B evaluates by returning an internal AssertionTester closure that takes a State argument *x* and performs the following:

1. Let *e* be *x*'s *endIndex*.
2. Call *IsWordChar*(*e*-1) and let *a* be the boolean result.
3. Call *IsWordChar*(*e*) and let *b* be the boolean result.
4. If *a* is **true** and *b* is **false**, return **false**.
5. If *a* is **false** and *b* is **true**, return **false**.
6. Return **true**.

The production *Assertion* :: (? = *Disjunction*) evaluates as follows:

1. Evaluate *Disjunction* to obtain a *Matcher m*.
2. Return an internal *Matcher* closure that takes two arguments, a State *x* and a *Continuation c*, and performs the following steps:
 1. Let *d* be a *Continuation* that always returns its State argument as a successful *MatchResult*.
 2. Call *m*(*x*, *d*) and let *r* be its result.
 3. If *r* is **failure**, return **failure**.
 4. Let *y* be *r*'s State.
 5. Let *cap* be *y*'s *captures* internal array.
 6. Let *xe* be *x*'s *endIndex*.

- 7. Let z be the State (xe, cap).
- 8. Call $c(z)$ and return its result.

The production $Assertion :: (? ! Disjunction)$ evaluates as follows:

- 1. Evaluate $Disjunction$ to obtain a $Matcher m$.
- 2. Return an internal $Matcher$ closure that takes two arguments, a State x and a Continuation c , and performs the following steps:
 - 1. Let d be a Continuation that always returns its State argument as a successful $MatchResult$.
 - 2. Call $m(x, d)$ and let r be its result.
 - 3. If r isn't **failure**, return **failure**.
 - 4. Call $c(x)$ and return its result.

The **abstract operation** $IsWordChar$ takes an integer parameter e and performs the following:

Deleted: internal helper function

- 1. If $e == -1$ or $e == InputLength$, return **false**.
- 2. Let c be the character $Input[e]$.
- 3. If c is one of the sixty-three characters in the table below, return **true**.

```

A B C D E F G H I J K L M N O P Q R S T U V W X Y Z
a b c d e f g h i j k l m n o p q r s t u v w x y z
0 1 2 3 4 5 6 7 8 9 _

```

- 4. Return **false**.

15.10.2.7 Quantifier

The production $Quantifier :: QuantifierPrefix$ evaluates as follows:

- 1. Evaluate $QuantifierPrefix$ to obtain the two results: an integer min and an integer (or ∞) max .
- 2. Return the three results min , max , and **true**.

The production $Quantifier :: QuantifierPrefix ?$ evaluates as follows:

- 1. Evaluate $QuantifierPrefix$ to obtain the two results: an integer min and an integer (or ∞) max .
- 2. Return the three results min , max , and **false**.

The production $QuantifierPrefix :: *$ evaluates by returning the two results 0 and ∞ .

The production $QuantifierPrefix :: +$ evaluates by returning the two results 1 and ∞ .

The production $QuantifierPrefix :: ?$ evaluates by returning the two results 0 and 1.

The production $QuantifierPrefix :: \{ DecimalDigits \}$ evaluates as follows:

- 1. Let i be the MV of $DecimalDigits$ (see 7.8.3).
- 2. Return the two results i and i .

The production $QuantifierPrefix :: \{ DecimalDigits , \}$ evaluates as follows:

- 1. Let i be the MV of $DecimalDigits$.
- 2. Return the two results i and ∞ .

The production $QuantifierPrefix :: \{ DecimalDigits , DecimalDigits \}$ evaluates as follows:

- 1. Let i be the MV of the first $DecimalDigits$.
- 2. Let j be the MV of the second $DecimalDigits$.
- 3. Return the two results i and j .

15.10.2.8 Atom

The production $Atom :: PatternCharacter$ evaluates as follows:

- 1. Let ch be the character represented by $PatternCharacter$.

2. Let A be a one-element CharSet containing the character ch .
3. Call $CharacterSetMatcher(A, \text{false})$ and return its Matcher result.

The production $Atom :: \cdot$ evaluates as follows:

1. Let A be the set of all characters except LineTerminator.
2. Call $CharacterSetMatcher(A, \text{false})$ and return its Matcher result.

Deleted: the four line terminator characters <LF>, <CR>, <LS>, or <PS>

The production $Atom :: \backslash AtomEscape$ evaluates by evaluating $AtomEscape$ to obtain a Matcher and returning that Matcher.

The production $Atom :: CharacterClass$ evaluates as follows:

1. Evaluate $CharacterClass$ to obtain a CharSet A and a boolean $invert$.
2. Call $CharacterSetMatcher(A, invert)$ and return its Matcher result.

The production $Atom :: (Disjunction)$ evaluates as follows:

1. Evaluate $Disjunction$ to obtain a Matcher m .
2. Let $parenIndex$ be the number of left capturing parentheses in the entire regular expression that occur to the left of this production expansion's initial left parenthesis. This is the total number of times the $Atom :: (Disjunction)$ production is expanded prior to this production's $Atom$ plus the total number of $Atom :: (Disjunction)$ productions enclosing this $Atom$.
3. Return an internal Matcher closure that takes two arguments, a State x and a Continuation c , and performs the following steps:
 1. Create an internal Continuation closure d that takes one State argument y and performs the following steps:
 1. Let cap be a fresh copy of y 's *captures* internal array.
 2. Let xe be x 's *endIndex*.
 3. Let ye be y 's *endIndex*.
 4. Let s be a fresh string whose characters are the characters of *Input* at positions xe (inclusive) through ye (exclusive).
 5. Set $cap[parenIndex+1]$ to s .
 6. Let z be the State (ye, cap) .
 7. Call $c(z)$ and return its result.
 2. Call $m(x, d)$ and return its result.

The production $Atom :: (? : Disjunction)$ evaluates by evaluating $Disjunction$ to obtain a Matcher and returning that Matcher.

The abstract operation $CharacterSetMatcher$ takes two arguments, a CharSet A and a boolean flag $invert$, and performs the following:

1. Return an internal Matcher closure that takes two arguments, a State x and a Continuation c , and performs the following steps:
 1. Let e be x 's *endIndex*.
 2. If $e == InputLength$, return **failure**.
 3. Let c be the character $Input[e]$.
 4. Let cc be the result of $Canonicalize(c)$.
 5. If $invert$ is **true**, go to step 8.
 6. If there does not exist a member a of set A such that $Canonicalize(a) == cc$, then return **failure**.
 7. Go to step 9.
 8. If there exists a member a of set A such that $Canonicalize(a) == cc$, then return **failure**.
 9. Let cap be x 's *captures* internal array.
 10. Let y be the State $(e+1, cap)$.
 11. Call $c(y)$ and return its result.

The abstract operation $Canonicalize$ takes a character parameter ch and performs the following steps:

1. If $IgnoreCase$ is **false**, return ch .

Deleted: The production $Atom :: (? = Disjunction)$ evaluates as follows:¶
 <#>Evaluate $Disjunction$ to obtain a Matcher m .¶
 <#>Return an internal Matcher closure that takes two arguments, a State x and a Continuation c , and performs the following:¶
 <#>Let d be a Continuation that always returns its State argument as a successful MatchResult.¶
 <#>Call $m(x, d)$ and let r be its result.¶
 <#>If r is **failure**, return **failure**.¶
 <#>Let y be r 's State.¶
 <#>Let cap be y 's *captures* internal array.¶
 <#>Let xe be x 's *endIndex*.¶
 <#>Let z be the State (xe, cap) .¶
 <#>Call $c(z)$ and return its result.¶
 The production $Atom :: (? ! Disjunction)$ evaluates as follows:¶
 <#>Evaluate $Disjunction$ to obtain a Matcher m .¶
 <#>Return an internal Matcher closure that takes two arguments, a State x and a Continuation c , and performs the following:¶
 <#>Let d be a Continuation that always returns its State argument as a successful MatchResult.¶
 <#>Call $m(x, d)$ and let r be its result.¶
 <#>If r isn't **failure**, return **failure**.¶
 <#>Call $c(x)$ and return its result.¶

Deleted: internal helper function

Deleted: internal helper function

- Let u be ch converted to upper case as if by calling [the standard built-in method `String.prototype.toUpperCase`](#) on the one-character string ch .
- If u does not consist of a single character, return ch .
- Let cu be u 's character.
- If ch 's [code unit](#) value is greater than or equal to decimal 128 and cu 's [code unit](#) value is less than decimal 128, then return ch .
- Return cu .

Deleted: code point

Deleted: code point

Informative comments: Parentheses of the form $(Disjunction)$ serve both to group the components of the *Disjunction* pattern together and to save the result of the match. The result can be used either in a backreference (\backslash followed by a nonzero decimal number), referenced in a replace string, or returned as part of an array from the regular expression matching [internal procedure](#). To inhibit the capturing behaviour of parentheses, use the form $(?: Disjunction)$ instead.

Deleted: function

The form $(?= Disjunction)$ specifies a zero-width positive lookahead. In order for it to succeed, the pattern inside *Disjunction* must match at the current position, but the current position is not advanced before matching the sequel. If *Disjunction* can match at the current position in several ways, only the first one is tried. Unlike other regular expression operators, there is no backtracking into a $(?=$ form (this unusual behaviour is inherited from Perl). This only matters when the *Disjunction* contains capturing parentheses and the sequel of the pattern contains backreferences to those captures.

For example,

```
/(?=(a+))/ .exec("baaabac")
```

matches the empty string immediately after the first **b** and therefore returns the array:

```
["", "aaa"]
```

To illustrate the lack of backtracking into the lookahead, consider:

```
/(?=(a+))a*b\1/ .exec("baaabac")
```

This expression returns

```
["aba", "a"]
```

and not:

```
["aaaba", "a"]
```

The form $(?! Disjunction)$ specifies a zero-width negative lookahead. In order for it to succeed, the pattern inside *Disjunction* must fail to match at the current position. The current position is not advanced before matching the sequel. *Disjunction* can contain capturing parentheses, but backreferences to them only make sense from within *Disjunction* itself. Backreferences to these capturing parentheses from elsewhere in the pattern always return **undefined** because the negative lookahead must fail for the pattern to succeed. For example,

```
/(.*?)a(?!(a+)b\2c)\2(.*)/ .exec("baaabaac")
```

looks for an **a** not immediately followed by some positive number n of **a**'s, a **b**, another n **a**'s (specified by the first $\backslash 2$) and a **c**. The second $\backslash 2$ is outside the negative lookahead, so it matches against **undefined** and therefore always succeeds. The whole expression returns the array:

```
["baaabaac", "ba", undefined, "abaac"]
```

In case-insignificant matches all characters are implicitly converted to upper case immediately before they are compared. However, if converting a character to upper case would expand that character into more than one character (such as converting **"ß"** ($\backslash u00DF$) into **"SS"**), then the character is left as-is instead. The character is also left as-is if it is not an ASCII character but converting it to upper case would make it into an ASCII character. This prevents Unicode characters such as $\backslash u0131$ and $\backslash u017F$ from matching regular expressions such as $/[a-z]/i$, which are only intended to match ASCII letters. Furthermore, if these conversions were allowed, then $/[^\W]/i$ would match each of **a**, **b**, ..., **h**, but not **i** or **s**.

15.10.2.9 AtomEscape

The production *AtomEscape* :: *DecimalEscape* evaluates as follows:

1. Evaluate *DecimalEscape* to obtain an EscapeValue *E*.
2. If *E* is not a character then go to step 6.
3. Let *ch* be *E*'s character.
4. Let *A* be a one-element CharSet containing the character *ch*.
5. Call *CharacterSetMatcher(A, false)* and return its Matcher result.
6. *E* must be an integer. Let *n* be that integer.
7. If *n*=0 or *n*>*NCapturingParens* then throw a **SyntaxError** exception.
8. Return an internal Matcher closure that takes two arguments, a State *x* and a Continuation *c*, and performs the following:
 1. Let *cap* be *x*'s *captures* internal array.
 2. Let *s* be *cap*[*n*].
 3. If *s* is **undefined**, then call *c(x)* and return its result.
 4. Let *e* be *x*'s *endIndex*.
 5. Let *len* be *s*'s length.
 6. Let *f*' be *e*+*len*.
 7. If *f*>*InputLength*, return **failure**.
 8. If there exists an integer *i* between 0 (inclusive) and *len* (exclusive) such that *Canonicalize(s[i])* is not the same character as *Canonicalize(Input [e+i])*, then return **failure**.
 9. Let *y* be the State (*f, cap*).
 10. Call *c(y)* and return its result.

The production *AtomEscape* :: *CharacterEscape* evaluates as follows:

1. Evaluate *CharacterEscape* to obtain a character *ch*.
2. Let *A* be a one-element CharSet containing the character *ch*.
3. Call *CharacterSetMatcher(A, false)* and return its Matcher result.

The production *AtomEscape* :: *CharacterClassEscape* evaluates as follows:

1. Evaluate *CharacterClassEscape* to obtain a CharSet *A*.
2. Call *CharacterSetMatcher(A, false)* and return its Matcher result.

Informative comments: An escape sequence of the form \ followed by a nonzero decimal number *n* matches the result of the *n*th set of capturing parentheses (see 15.10.2.11). It is an error if the regular expression has fewer than *n* capturing parentheses. If the regular expression has *n* or more capturing parentheses but the *n*th one is **undefined** because it hasn't captured anything, then the backreference always succeeds.

15.10.2.10 CharacterEscape

The production *CharacterEscape* :: *ControlEscape* evaluates by returning the character according to the table below:

<i>ControlEscape</i>	<i>Unicode Value</i>	<i>Name</i>	<i>Symbol</i>
t	\u0009	horizontal tab	<HT>
n	\u000A	line feed (new line)	<LF>
v	\u000B	vertical tab	<VT>
f	\u000C	form feed	<FF>
r	\u000D	carriage return	<CR>

The production *CharacterEscape* :: *c ControlLetter* evaluates as follows:

1. Let *ch* be the character represented by *ControlLetter*.
2. Let *i* be *ch*'s **code unit** value.
3. Let *j* be the remainder of dividing *i* by 32.
4. Return the Unicode character numbered *j*.

Deleted: code point

The production *CharacterEscape* :: *HexEscapeSequence* evaluates by evaluating the CV of the *HexEscapeSequence* (see 7.8.4) and returning its character result.

The production *CharacterEscape* :: *UnicodeEscapeSequence* evaluates by evaluating the CV of the *UnicodeEscapeSequence* (see 7.8.4) and returning its character result.

The production *CharacterEscape* :: *IdentityEscape* evaluates by returning the character represented by *IdentityEscape*.

15.10.2.11 DecimalEscape

The production *DecimalEscape* :: *DecimalIntegerLiteral* [lookahead ≠ *DecimalDigit*] evaluates as follows.

1. Let *i* be the MV of *DecimalIntegerLiteral*.
2. If *i* is zero, return the EscapeValue consisting of a <NUL> character (Unicode value 0000).
3. Return the EscapeValue consisting of the integer *i*.

The definition of “the MV of *DecimalIntegerLiteral*” is in 7.8.3.

Informative comments: If \backslash is followed by a decimal number *n* whose first digit is not 0, then the escape sequence is considered to be a backreference. It is an error if *n* is greater than the total number of left capturing parentheses in the entire regular expression. $\backslash 0$ represents the NUL character and cannot be followed by a decimal digit.

15.10.2.12 CharacterClassEscape

The production *CharacterClassEscape* :: **d** evaluates by returning the ten-element set of characters containing the characters 0 through 9 inclusive.

The production *CharacterClassEscape* :: **D** evaluates by returning the set of all characters not included in the set returned by *CharacterClassEscape* :: **d**.

The production *CharacterClassEscape* :: **s** evaluates by returning the set of characters containing the characters that are on the right-hand side of the *WhiteSpace* (7.2) or *LineTerminator* (7.3) productions.

The production *CharacterClassEscape* :: **S** evaluates by returning the set of all characters not included in the set returned by *CharacterClassEscape* :: **s**.

The production *CharacterClassEscape* :: **w** evaluates by returning the set of characters containing the sixty-three characters:

a b c d e f g h i j k l m n o p ~~q~~ r s t u v w x y z
A B C D E F G H I J K L M N O P Q R S T U V W X Y Z
0 1 2 3 4 5 6 7 8 9 _

Deleted: q

The production *CharacterClassEscape* :: **W** evaluates by returning the set of all characters not included in the set returned by *CharacterClassEscape* :: **w**.

15.10.2.13 CharacterClass

The production *CharacterClass* :: [[lookahead ≠ {^}] *ClassRanges*] evaluates by evaluating *ClassRanges* to obtain a CharSet and returning that CharSet and the boolean **false**.

The production *CharacterClass* :: [^ *ClassRanges*] evaluates by evaluating *ClassRanges* to obtain a CharSet and returning that CharSet and the boolean **true**.

15.10.2.14 ClassRanges

The production *ClassRanges* :: [empty] evaluates by returning the empty CharSet.

The production *ClassRanges* :: *NonemptyClassRanges* evaluates by evaluating *NonemptyClassRanges* to obtain a CharSet and returning that CharSet.

15.10.2.15 NonemptyClassRanges

The production *NonemptyClassRanges* :: *ClassAtom* evaluates by evaluating *ClassAtom* to obtain a CharSet and returning that CharSet.

The production *NonemptyClassRanges* :: *ClassAtom NonemptyClassRangesNoDash* evaluates as follows:

1. Evaluate *ClassAtom* to obtain a CharSet *A*.
2. Evaluate *NonemptyClassRangesNoDash* to obtain a CharSet *B*.
3. Return the union of CharSets *A* and *B*.

The production *NonemptyClassRanges* :: *ClassAtom - ClassAtom ClassRanges* evaluates as follows:

1. Evaluate the first *ClassAtom* to obtain a CharSet *A*.
2. Evaluate the second *ClassAtom* to obtain a CharSet *B*.
3. Evaluate *ClassRanges* to obtain a CharSet *C*.
4. Call *CharacterRange(A, B)* and let *D* be the resulting CharSet.
5. Return the union of CharSets *D* and *C*.

The **abstract operation** *CharacterRange* takes two CharSet parameters *A* and *B* and performs the following:

1. If *A* does not contain exactly one character or *B* does not contain exactly one character then throw a **SyntaxError** exception.
2. Let *a* be the one character in CharSet *A*.
3. Let *b* be the one character in CharSet *B*.
4. Let *i* be the **code unit** value of character *a*.
5. Let *j* be the **code unit** value of character *b*.
6. If *i* > *j* then throw a **SyntaxError** exception.
7. Return the set containing all characters numbered *i* through *j*, inclusive.

Deleted: internal helper function

Deleted: code point

Deleted: code point

15.10.2.16 NonemptyClassRangesNoDash

The production *NonemptyClassRangesNoDash* :: *ClassAtom* evaluates by evaluating *ClassAtom* to obtain a CharSet and returning that CharSet.

The production *NonemptyClassRangesNoDash* :: *ClassAtomNoDash NonemptyClassRangesNoDash* evaluates as follows:

1. Evaluate *ClassAtomNoDash* to obtain a CharSet *A*.
2. Evaluate *NonemptyClassRangesNoDash* to obtain a CharSet *B*.
3. Return the union of CharSets *A* and *B*.

The production *NonemptyClassRangesNoDash* :: *ClassAtomNoDash - ClassAtom ClassRanges* evaluates as follows:

1. Evaluate *ClassAtomNoDash* to obtain a CharSet *A*.
2. Evaluate *ClassAtom* to obtain a CharSet *B*.
3. Evaluate *ClassRanges* to obtain a CharSet *C*.
4. Call *CharacterRange(A, B)* and let *D* be the resulting CharSet.
5. Return the union of CharSets *D* and *C*.

Informative comments: *ClassRanges* can expand into single *ClassAtoms* and/or ranges of two *ClassAtoms* separated by dashes. In the latter case the *ClassRanges* includes all characters between the first *ClassAtom* and the second *ClassAtom*, inclusive; an error occurs if either *ClassAtom* does not represent a single character (for example, if one is `\w`) or if the first *ClassAtom*'s **code unit** value is greater than the second *ClassAtom*'s **code unit** value.

Deleted: code point

Deleted: code point

Even if the pattern ignores case, the case of the two ends of a range is significant in determining which characters belong to the range. Thus, for example, the pattern `/[E-F]/i` matches only the letters **E**, **F**, **e**, and **f**, while the pattern `/[E-f]/i` matches all upper and lower-case ASCII letters as well as the symbols `[`, `\`, `]`, `^`, `_`, and ```.

A `-` character can be treated literally or it can denote a range. It is treated literally if it is the first or last character of *ClassRanges*, the beginning or end limit of a range specification, or immediately follows a range specification.

15.10.2.17 ClassAtom

The production *ClassAtom* :: - evaluates by returning the CharSet containing the one character -.

The production *ClassAtom* :: *ClassAtomNoDash* evaluates by evaluating *ClassAtomNoDash* to obtain a CharSet and returning that CharSet.

15.10.2.18 ClassAtomNoDash

The production *ClassAtomNoDash* :: *SourceCharacter* **but not one of \]** - evaluates by returning a one-element CharSet containing the character represented by *SourceCharacter*.

The production *ClassAtomNoDash* :: \ *ClassEscape* evaluates by evaluating *ClassEscape* to obtain a CharSet and returning that CharSet.

15.10.2.19 ClassEscape

The production *ClassEscape* :: *DecimalEscape* evaluates as follows:

1. Evaluate *DecimalEscape* to obtain an EscapeValue *E*.
2. If *E* is not a character then throw a **SyntaxError** exception.
3. Let *ch* be *E*'s character.
4. Return the one-element CharSet containing the character *ch*.

The production *ClassEscape* :: **b** evaluates by returning the CharSet containing the one character <BS> (Unicode value 0008).

The production *ClassEscape* :: *CharacterEscape* evaluates by evaluating *CharacterEscape* to obtain a character and returning a one-element CharSet containing that character.

The production *ClassEscape* :: *CharacterClassEscape* evaluates by evaluating *CharacterClassEscape* to obtain a CharSet and returning that CharSet.

Informative comments: A *ClassAtom* can use any of the escape sequences that are allowed in the rest of the regular expression except for \b, \B, and backreferences. Inside a *CharacterClass*, \b means the backspace character, while \B and backreferences raise errors. Using a backreference inside a *ClassAtom* causes an error.

15.10.3 The RegExp Constructor Called as a Function

15.10.3.1 RegExp(pattern, flags)

If *pattern* is an object *R* whose [[Class]] property is "**RegExp**" and *flags* is **undefined**, then return *R* unchanged. Otherwise call the [standard built-in](#) RegExp constructor (15.10.4.1), passing it the *pattern* and *flags* arguments and return the object constructed by that constructor.

15.10.4 The RegExp Constructor

When **RegExp** is called as part of a **new** expression, it is a constructor: it initialises the newly created object.

15.10.4.1 new RegExp(pattern, flags)

If *pattern* is an object *R* whose [[Class]] property is "**RegExp**" and *flags* is **undefined**, then let *P* be the *pattern* used to construct *R* and let *F* be the flags used to construct *R*. If *pattern* is an object *R* whose [[Class]] property is "**RegExp**" and *flags* is not **undefined**, then throw a **TypeError** exception. Otherwise, let *P* be the empty string if *pattern* is **undefined** and ToString(*pattern*) otherwise, and let *F* be the empty string if *flags* is **undefined** and ToString(*flags*) otherwise.

If the characters of *P* do not have the syntactic form *Pattern*, then throw a **SyntaxError** exception. Otherwise let the newly constructed object have a [[Match]] property obtained by evaluating ("compiling") the the characters of *P* as a *Pattern* as described in section 15.10.2. Note that evaluating *P* as a *Pattern* may throw a **SyntaxError** exception.

If *F* contains any character other than "**g**", "**i**", or "**m**", or if it contains the same character more than once, then throw a **SyntaxError** exception.

If a **SyntaxError** exception is not thrown, then:

Let *S* be a string in the form of a *Pattern* equivalent to *P*, in which certain characters are escaped as described below. *S* may or may not be identical to *P* or *pattern*; however, the internal procedure that would result from evaluating *S* as a *Pattern* must behave identically to the internal procedure given by the constructed object's `[[Match]]` property.

The characters `/` or `backslash \` occurring in the pattern shall be escaped in *S* as necessary to ensure that the string value formed by concatenating the strings `"/", S, "/"`, and *F* can be parsed (in an appropriate lexical context) as a *RegularExpressionLiteral* that behaves identically to the constructed regular expression. For example, if *P* is `"/`, then *S* could be `"\"` or `"\u002F"`, among other possibilities, but not `"/`, because `///` followed by *F* would be parsed as a *SingleLineComment* rather than a *RegularExpressionLiteral*. If *P* is the empty string, this specification can be met by letting *S* be `"(?:)"`.

The following properties of the newly constructed object are data properties with the attributes that are specified in 15.10.7. The `[[Value]]` of each property is set as follows:

The `source` property of the newly constructed object is set to *S*.

The `global` property of the newly constructed object is set to a Boolean value that is `true` if *F* contains the character `"g"` and `false` otherwise.

The `ignoreCase` property of the newly constructed object is set to a Boolean value that is `true` if *F* contains the character `"i"` and `false` otherwise.

The `multiline` property of the newly constructed object is set to a Boolean value that is `true` if *F* contains the character `"m"` and `false` otherwise.

The `lastIndex` property of the newly constructed object is set to `0`.

The `[[Prototype]]` property of the newly constructed object is set to the `standard built-in` `RegExp` prototype object, as specified in 15.10.6.

The `[[Class]]` property of the newly constructed object is set to `"RegExp"`.

NOTE

If pattern is a StringLiteral, the usual escape sequence substitutions are performed before the string is processed by RegExp. If pattern must contain an escape sequence to be recognised by RegExp, any backslash \ characters must be escaped within the StringLiteral to prevent them being removed when the contents of the StringLiteral are formed.

15.10.5 Properties of the RegExp Constructor

The value of the internal `[[Prototype]]` property of the `RegExp` constructor is the `standard built-in` `Function` prototype object (15.3.4).

Besides the internal properties and the `length` property (whose value is `2`), the `RegExp` constructor has the following properties:

15.10.5.1 RegExp.prototype

The initial value of `RegExp.prototype` is the `RegExp` prototype object (15.10.6).

This property shall have the attributes { `[[Writable]]: false`, `[[Enumerable]]: false`, `[[Configurable]]: false` }.

15.10.6 Properties of the RegExp Prototype Object

The value of the internal `[[Prototype]]` property of the `RegExp` prototype object is the `standard built-in` `Object` prototype object (15.2.4). The `RegExp` prototype object is itself a regular expression object; its `[[Class]]` is `"RegExp"`.

The `RegExp` prototype object does not have a `valueOf` property of its own; however, it inherits the `valueOf` property from the `Object` prototype object.

In the following descriptions of functions that are properties of the `RegExp` prototype object, the phrase "this `RegExp` object" refers to the object that is the `this` value for the invocation of the function; a

Deleted: "

Deleted: "

Deleted: "

Deleted: "

Deleted: "

Deleted: "

Deleted: "

Deleted: If *F* contains any character other than `"g"`, `"i"`, or `"m"`, or if it contains the same one more than once, then throw a `SyntaxError` exception.¶
If *P*'s characters do not have the form *Pattern*, then throw a `SyntaxError` exception. Otherwise let the newly constructed object have a `[[Match]]` property obtained by evaluating ("compiling") *Pattern*. Note that evaluating *Pattern* may throw a `SyntaxError` exception. (Note: if *pattern* is a *StringLiteral*, the usual escape sequence substitutions are performed before the string is processed by `RegExp`. If *pattern* must contain an escape sequence to be recognised by `RegExp`, the `"\"` character must be escaped within the *StringLiteral* to prevent its being removed when the contents of the *StringLiteral* are formed.)¶
The `source` property of the newly constructed object is set to an implementation-defined string value in the form of a *Pattern* based on *P*.¶

Deleted: original

Deleted: , the one that is the initial value of `RegExp.prototype`

Deleted: DontEnum, DontDelete, ReadOnly

Deleted: The value of the internal `[[Class]]` property of the `RegExp` prototype object is `"Object"`

TypeError exception is thrown if the **this** value is not an object for which the value of the internal `[[Class]]` property is `"RegExp"`.

15.10.6.1 `RegExp.prototype.constructor`

The initial value of `RegExp.prototype.constructor` is the built-in `RegExp` constructor.

15.10.6.2 `RegExp.prototype.exec(string)`

Performs a regular expression match of *string* against the regular expression and returns an Array object containing the results of the match, or `null` if the string did not match

The string `ToString(string)` is searched for an occurrence of the regular expression pattern as follows:

1. Let *S* be the value of `ToString(string)`.
 2. Let *length* be the length of *S*.
 3. Let *lastIndex* be the value of the `lastIndex` property.
 4. Let *i* be the value of `ToInteger(lastIndex)`.
 5. If the `global` property is `false`, let *i* = 0.
 6. If $I < 0$ or $I > length$ then set `lastIndex` to 0 and return `null`.
 7. Call `[[Match]]`, giving it the arguments *S* and *i*. If `[[Match]]` returned `failure`, go to step 8; otherwise let *r* be its State result and go to step 10.
 8. Let $i = i + 1$.
 9. Go to step 6.
 10. Let *e* be *r*'s `endIndex` value.
 11. If the `global` property is `true`, set `lastIndex` to *e*.
 12. Let *n* be the length of *r*'s `captures` array. (This is the same value as 15.10.2.1's `NCapturingParens`.)
 13. Return a new array with the following properties:
 - The `index` property is set to the position of the matched substring within the complete string *S*.
 - The `input` property is set to *S*.
 - The `length` property is set to $n + 1$.
 - The `0` property is set to the matched substring (i.e. the portion of *S* between offset *i* inclusive and offset *e* exclusive).
- For each integer *i* such that $I > 0$ and $I \leq n$, set the property named `ToString(i)` to the *i*th element of *r*'s `captures` array.

15.10.6.3 `RegExp.prototype.test(string)`

Equivalent to the expression `RegExp.prototype.exec(string) != null`.

15.10.6.4 `RegExp.prototype.toString()`

Return the string value formed by concatenating the strings `"/"`, the string value of the source property of this `RegExp` object, and `"/"`; plus `"g"` if the `global` property is `true`, `"i"` if the `ignoreCase` property is `true`, and `"m"` if the `multiline` property is `true`.

NOTE

The returned string has the form of a `RegularExpressionLiteral` that evaluates to another `RegExp` object with the same behaviour as this object.

15.10.7 Properties of `RegExp` Instances

`RegExp` instances inherit properties from their `[[Prototype]]` object as specified above and also have the following properties.

15.10.7.1 `source`

The value of the `source` property is string in the form of a *Pattern* representing the current regular expression. This property shall have the attributes `{ [[Writable]]: false, [[Enumerable]]: false, [[Configurable]]: false }`.

Deleted: Let *src* be a string in the form of a *Pattern* representing the current regular expression. *src* may or may not be identical to the `source` property or to the source code supplied to the `RegExp` constructor; however, if *src* were supplied to the `RegExp` constructor along with the current regular expression's flags, the resulting regular expression must behave identically to the current regular expression.¶
`toString()`

Deleted: `s`

Deleted: `a`

Deleted: `src`

Deleted: ¶

Deleted: **NOTE**¶
*An implementation may choose to take advantage of *src* being allowed to be different from the source passed to the `RegExp` constructor to escape special characters in *src*. For example, in the regular expression obtained from `new RegExp("/")`, *src* could be, among other possibilities, `"/"` or `"\"`. The latter would permit the entire result (`"/\"`) of the `toString` call to have the form `RegularExpressionLiteral`.¶*

Deleted: `DontDelete, ReadOnly, DontEnum`

15.10.7.2 global

The value of the **global** property is a Boolean value indicating whether the flags contained the character "g". This property shall have the attributes { [[Writable]]: false, [[Enumerable]]: false, [[Configurable]]: false }.

Deleted: DontDelete, ReadOnly, DontEnum

15.10.7.3 ignoreCase

The value of the **ignoreCase** property is a Boolean value indicating whether the flags contained the character "i". This property shall have the attributes { [[Writable]]: false, [[Enumerable]]: false, [[Configurable]]: false }.

Deleted: DontDelete, ReadOnly, DontEnum

15.10.7.4 multiline

The value of the **multiline** property is a Boolean value indicating whether the flags contained the character "m". This property shall have the attributes { [[Writable]]: false, [[Enumerable]]: false, [[Configurable]]: false }.

Deleted: DontDelete, ReadOnly, DontEnum

15.10.7.5 lastIndex

The value of the **lastIndex** property is an integer that specifies the string position at which to start the next match. This property shall have the attributes { [[Writable]]: true, [[Enumerable]]: false, [[Configurable]]: false }.

Deleted: DontDelete, DontEnum

15.11 Error Objects

Instances of Error objects are thrown as exceptions when runtime errors occur. The Error objects may also serve as base objects for user-defined exception classes.

15.11.1 The Error Constructor Called as a Function

When **Error** is called as a function rather than as a constructor, it creates and initialises a new Error object. Thus the function call **Error(...)** is equivalent to the object creation expression **new Error(...)** with the same arguments.

15.11.1.1 Error (message)

The [[Prototype]] property of the newly constructed object is set to the original Error prototype object, the one that is the initial value of **Error.prototype** (15.11.3.1).

The [[Class]] property of the newly constructed object is set to "**Error**".

The [[Extensible]] property of the newly constructed object is set to **true**.

If the argument *message* is not **undefined**, the **message** property of the newly constructed object is set to **ToString(message)**. Otherwise, the **message** property is set to the empty string.

15.11.2 The Error Constructor

When **Error** is called as part of a **new** expression, it is a constructor: it initialises the newly created object.

15.11.2.1 new Error (message)

The [[Prototype]] property of the newly constructed object is set to the original Error prototype object, the one that is the initial value of **Error.prototype** (15.11.3.1).

The [[Class]] property of the newly constructed Error object is set to "**Error**".

The [[Extensible]] property of the newly constructed object is set to **true**.

If the argument *message* is not **undefined**, the **message** property of the newly constructed object is set to **ToString(message)**.

15.11.3 Properties of the Error Constructor

The value of the internal [[Prototype]] property of the Error constructor is the Function prototype object (15.3.4).

Besides the internal properties and the **length** property (whose value is **1**), the Error constructor has the following property:

15.11.3.1 Error.prototype

The initial value of **Error.prototype** is the Error prototype object (15.11.4).

This property has the attributes { **[[Writable]]: false, [[Enumerable]]: false, [[Configurable]]: false** }.

Deleted: DontEnum, DontDelete, ReadOnly

15.11.4 Properties of the Error Prototype Object

The Error prototype object is itself an Error object (its **[[Class]]** is **"Error"**).

The value of the internal **[[Prototype]]** property of the Error prototype object is the [standard built-in Object prototype object](#) (15.2.4).

Deleted: 15.2.3.1

15.11.4.1 Error.prototype.constructor

The initial value of **Error.prototype.constructor** is the built-in **Error** constructor.

15.11.4.2 Error.prototype.name

The initial value of **Error.prototype.name** is **"Error"**.

15.11.4.3 Error.prototype.message

The initial value of **Error.prototype.message** is an implementation-defined string.

15.11.4.4 Error.prototype.toString ()

Returns an implementation defined string.

15.11.5 Properties of Error Instances

Error instances have no special properties beyond those inherited from the Error prototype object.

15.11.6 Native Error Types Used in This Standard

One of the *NativeError* objects below is thrown when a runtime error is detected. All of these objects share the same structure, as described in 15.11.7.

15.11.6.1 EvalError

Indicates that the global function **name eval** was used in a way that is incompatible with [this specification](#). See [12.2.1](#) and [13.1](#).

Deleted: its definition

Deleted: 15.1.2.1

15.11.6.2 RangeError

Indicates a numeric value has exceeded the allowable range. See 15.4.2.2, 15.4.5.1, 15.7.4.5, 15.7.4.6, and 15.7.4.7.

15.11.6.3 ReferenceError

Indicate that an invalid reference value has been detected. See 8.7.1, and 8.7.2.

15.11.6.4 SyntaxError

Indicates that a parsing error has occurred. See 15.1.2.1, 15.3.2.1, 15.10.2.5, 15.10.2.9, 15.10.2.15, 15.10.2.19, and 15.10.4.1.

15.11.6.5 TypeError

Indicates the actual type of an operand is different than the expected type. See [8.12](#), [8.12.9](#), 9.9, 11.2.2, 11.2.3, 11.8.6, 11.8.7, 15.3.4.2, 15.3.4.3, 15.3.4.4, 15.3.5.3, 15.4.4.2, 15.4.4.3, 15.5.4.2, 15.5.4.3, 15.6.4, 15.6.4.2, 15.6.4.3, 15.7.4, 15.7.4.2, 15.7.4.4, 15.9.5, 15.9.5.9, 15.9.5.27, 15.10.4.1, and 15.10.6.

Deleted: 8.6.2

Deleted: 8.6.2.6

15.11.6.6 URIError

Indicates that one of the global URI handling functions was used in a way that is incompatible with its definition. See 15.1.3.

15.11.7 NativeError Object Structure

When an ECMAScript implementation detects a runtime error, it throws an instance of one of the *NativeError* objects defined in 15.11.6. Each of these objects has the structure described below, differing only in the name used as the constructor name instead of *NativeError*, in the **name** property of the prototype object, and in the implementation-defined **message** property of the prototype object.

For each error object, references to *NativeError* in the definition should be replaced with the appropriate error object name from 15.11.6.

15.11.7.1 *NativeError* Constructors Called as Functions

When a *NativeError* constructor is called as a function rather than as a constructor, it creates and initialises a new object. A call of the object as a function is equivalent to calling it as a constructor with the same arguments.

15.11.7.2 *NativeError* (message)

The `[[Prototype]]` property of the newly constructed object is set to the prototype object for this error constructor. The `[[Class]]` property of the newly constructed object is set to "Error". The `[[Extensible]]` property of the newly constructed object is set to true.

If the argument *message* is not **undefined**, the **message** property of the newly constructed object is set to `ToString(message)`.

15.11.7.3 The *NativeError* Constructors

When a *NativeError* constructor is called as part of a **new** expression, it is a constructor: it initialises the newly created object.

15.11.7.4 New *NativeError* (message)

The `[[Prototype]]` property of the newly constructed object is set to the prototype object for this *NativeError* constructor. The `[[Class]]` property of the newly constructed object is set to "Error". The `[[Extensible]]` property of the newly constructed object is set to true.

If the argument *message* is not **undefined**, the **message** property of the newly constructed object is set to `ToString(message)`.

15.11.7.5 Properties of the *NativeError* Constructors

The value of the internal `[[Prototype]]` property of a *NativeError* constructor is the Function prototype object (15.3.4).

Besides the internal properties and the **length** property (whose value is **1**), each *NativeError* constructor has the following property:

15.11.7.6 *NativeError*.prototype

The initial value of *NativeError*.prototype is a *NativeError* prototype object (15.11.7.7). Each *NativeError* constructor has a separate prototype object.

This property has the attributes { `[[Writable]]: false`, `[[Enumerable]]: false`, `[[Configurable]]: false` }.

15.11.7.7 Properties of the *NativeError* Prototype Objects

Each *NativeError* prototype object is an Error object (its `[[Class]]` is "Error").

The value of the internal `[[Prototype]]` property of each *NativeError* prototype object is the standard built-in Error prototype object (15.11.4).

15.11.7.8 *NativeError*.prototype.constructor

The initial value of the **constructor** property of the prototype for a given *NativeError* constructor is the *NativeError* constructor function itself (15.11.7).

15.11.7.9 *NativeError*.prototype.name

The initial value of the **name** property of the prototype for a given *NativeError* constructor is the name of the constructor (the name used instead of *NativeError*).

15.11.7.10 *NativeError*.prototype.message

The initial value of the **message** property of the prototype for a given *NativeError* constructor is an implementation-defined string.

NOTE

The prototypes for the NativeError constructors do not themselves provide a toString function, but instances of errors will inherit it from the Error prototype object.

Deleted: DontEnum, DontDelete, ReadOnly

15.11.7.11 Properties of *NativeError* Instances

NativeError instances have no special properties beyond those inherited from the Error prototype object.

15.12 The JSON Object

The JSON object is a single object that contains two functions, **parse** and **stringify**, that are used to parse and construct JSON texts. The JSON Data Interchange Format is described in RFC 4627 <<http://www.ietf.org/rfc/rfc4627.txt?number=4627>>.

The value of the internal `[[Prototype]]` property of the JSON object is the standard built-in Object prototype object (15.2.4). The value of the internal `[[Class]]` property of the JSON object is "JSON". The value of the `[[Extensible]]` property of the JSON object is set to **true**.

The JSON object does not have a `[[Construct]]` property; it is not possible to use the JSON object as a constructor with the **new** operator.

The JSON object does not have a `[[Call]]` property; it is not possible to invoke the JSON object as a function.

15.12.1 The JSON Grammar

`JSON.stringify` produces a string that conforms to the following JSON grammar. `JSON.parse` accepts a string that conform to the JSON grammar.

15.12.1.1 The JSON Lexical Grammar

JSON is similar to ECMAScript source text in that it consists of a sequence of Unicode characters. However, JSON text is limited to the subset of Unicode specified by the production *JSONSourceCharacter*. The JSON Lexical Grammar defines the tokens that make up a JSON text similar to the manner that the ECMAScript lexical grammar defines the tokens of a ECMAScript source text. The JSON Lexical grammar only recognizes the white space character specified by the production *JSONWhiteSpace*. The JSON lexical grammar shares some productions with the ECMAScript lexical grammar. All nonterminal symbols of the grammar that do not begin with the characters "JSON" are defined by productions of the ECMAScript lexical grammar.

Syntax

JSONSourceCharacter ::

SourceCharacter but not *U+0000* thru *U+001F*

JSONWhiteSpace ::

<TAB>

<CR>

<LF>

<SP>

JSONString ::

"*JSONStringCharacters*_{opt}"

JSONStringCharacters ::

JSONStringCharacter *JSONStringCharacters*_{opt}

JSONStringCharacter ::

Deleted: 15.2.3.1

Deleted: following

Deleted: JSON recognizes <SP>, <TAB>, <CR>, and <LF> as white space. Only those characters are recognized as white space.
JSONValue :
NullLiteral
BooleanLiteral
JSONObject
JSONArray
JSONString
JSONNumber
JSONObject :
{ }
{ *JSONMemberList* }
JSONMember :
JSONString : *JSONValue*
JSONMemberList :
JSONMember
JSONMemberList , JSONMember
JSONArray :
[]
[*JSONElementList*]
JSONElementList :
JSONValue
JSONElementList , JSONValue

JSONSourceCharacter but not double-quote " or backslash \
JSONEscapeSequence

Deleted: Any Unicode character except U+0000 thru U+001F or

JSONEscapeSequence ::
JSONEscapeCharacter
UnicodeEscapeSequence

Deleted: u HexDigit HexDigit HexDigit HexDigit

JSONEscapeCharacter :: one of
" / \ b f n r t

JSONNumber ::
-opt DecimalIntegerLiteral JSONFraction_{opt} ExponentPart_{opt}

Deleted: JSON

JSONFraction ::
. DecimalDigits

Deleted: JSONExponent

JSONNullLiteral ::
NullLiteral

Deleted: JSONInteger ::
DecimalDigit^{*}
JSONDigit DecimalDigits^{*}
JSONDigit :: one of^{*}
1 2 3 4 5 6 7 8 9^{*}

JSONBooleanLiteral ::
BooleanLiteral

15.12.1.2 The JSON Syntactic Grammar

The JSON Syntactic Grammar defines a valid JSON text in terms of tokens from defined by the JSON lexical grammar. The goal symbol of the grammar is JSONValue.

Syntax

JSONValue :
NullLiteral
BooleanLiteral
JSONObject
JSONArray
JSONString
JSONNumber

JSONObject :
{ }
{ JSONMemberList }

JSONMember :
JSONString : JSONValue

JSONMemberList :
JSONMember
JSONMemberList , JSONMember

JSONArray :
[]
[JSONElementList]

JSONElementList :
JSONValue
JSONElementList , JSONValue

15.12.2 parse (text [, reviver])

The parse function parses a JSON text (a JSON formatted string) and produces a ECMAScript value. The JSON format is a restricted form of ECMAScript literal. JSON objects are realized as ECMAScript objects. JSON Arrays are realized as ECMAScript arrays. JSON strings, numbers, booleans, and null are realized as ECMAScript strings, numbers, booleans, and null. JSON uses a more limited set of white space characters than *WhiteSpace*. The process of parsing is similar to 11.1.4 and 11.1.5 as constrained by the JSON grammar.

Deleted: JSONExponent ::
ExponentIndicator SignedInteger^{*}

Deleted: 1

The optional reviver parameter is a function that takes two parameters, (key, value). It can filter and transform the results. It is called with each of the key/value pairs produced by the parse, and its return

value is used instead of the original value. If it returns what it received, the structure is not modified. If it returns **undefined** then the member is deleted from the result.

1. Let *JText* be `Tostring(text)`.
2. Parse *JText* using the grammars in 15.12.1. Throw a **SyntaxError** exception if the *JText* did not conform to the JSON grammar for the goal symbol *JSONValue*.
3. Let *unfiltered* be the result of parsing and evaluating *JText* as if it was the source text of an ECMAScript program. Note that since *JText* conforms to the JSON grammar this result will be either a constant value or an object that is defined by either an *ArrayLiteral* or an *ObjectLiteral*.
4. If `IsCallable(reviver)` is **true**, then
 - a. Let *root* be a new object created as if by the expression `new Object()`, where **Object** is the standard built-in constructor with that name.
 - b. Call the `[[DefineOwnProperty]]` internal method of *root* with the empty string, the PropertyDescriptor `{[[Value]]: unfiltered, [[Writable]]: true, [[Enumerable]]: true, [[Configurable]]: true}`, and **false** as arguments.
 - c. Return the result of calling the abstract operation *Walk*, passing *root* and the empty string. The abstract operation *Walk* is described below.
5. Else
 - a. Return *unfiltered*.

Deleted: of...

Deleted: Result(1) as a JSON value...sing the

Deleted: Produce a new object as if by the original Object constructor...et *root* be a new

Deleted: Put...efineOwnProperty]] internal

Deleted: Call...the abstract operation *w...alk*,

Deleted: <#>Return Result(3.c).¶

Deleted: Result(2)

The abstract operation *Walk* is a recursive abstract operation that takes two parameters: a *holder* object and the string *name* of a property in that object. *Walk* uses the value of *reviver* that was originally passed to the above parse function.

1. Let *val* be the result of calling the `[[Get]]` internal method of *holder* with argument *name*.
2. If *val* is an object, and `IsCallable(val)` is **false**, then
 - a. If the `[[Class]]` internal property of *val* is **"Array"**
 - i. Set *I* to 0.
 - ii. Let *len* be the result of calling the `[[Get]]` internal method of *val* with argument **"length"**.
 - iii. Repeat while *I* ≤ *len*.
 1. Let *newElement* be the result of calling the abstract operation *walk*, passing *val* and `Tostring(I)`.
 2. Let *newElement* be the result of calling the `[[Put]]` internal method of *val* with arguments `Tostring(I)` and *newElement*.
 3. Add *I* to *I*.
 - b. Else
 - i. Let *keys* be an internal List of Strings consisting of the names of all the own properties of *val* whose `[[Enumerable]]` attribute is **true**. The ordering of the strings should be the same as that used by the **Object.keys** standard built-in function.
 - ii. For each string *P* in *keys* do
 1. Let *newElement* be the result of calling the abstract operation *walk*, passing *val* and *P*.
 2. If *newElement* is **undefined**, then
 - a. Call the `[[Delete]]` internal method of *val* with *P* and **false** as arguments.
 3. Else
 - a. Call the `[[Put]]` internal method of *val* with arguments *P* and *newElement*.
3. Return the result of calling the `[[Call]]` internal method of *reviver* passing *holder* as the **this** value and with an argument list consisting of *name* and *val*.

Deleted: Call...et *val* be the result of calling the

Deleted: Result(1)...al is an object, and

Deleted: Result(1)

Deleted: W...repeat while *I* is less than... then

Deleted: Call...et *newElement* be the result of

Deleted: Call...he `[[Put]]` internal method of

Deleted: <#>Produce an array using the original Object.keys method with Result(1).¶

Deleted: Call...the internal...abstract operatio

Deleted: Result(2.b.ii.1)

Deleted: Result(1)...with *P* and **false** as

Deleted: Result(1)...with arguments

Deleted: Call...eturn the result of calling the

Deleted: <#>Return Result(3).¶

NOTE

In the case where there are duplicate name strings within an object, lexically preceding values for the same key shall be overwritten.

15.12.3 stringify (value [, replacer [, space]])

The `stringify` function produces a JSON formatted string that captures information from a JavaScript value. It can take three parameters. The first parameter is required. The *value* parameter is a JavaScript value is usually an object or array, although it can also be a string, boolean, number or **null**. The optional *replacer* parameter is either a function that alters the way objects and arrays are stringified, or an array of strings that acts as a whitelist for selecting the keys that will be stringified. The optional *space* parameter is a string or number that allows the result to have white space injected into it to improve human readability.

Deleted: 2

These are the steps in stringifying an object:

1. Let *stack* be an empty List.
2. Let *indent* be the empty string.
3. If *Type(space)* is object then,
 - a. If the *[[Class]]* internal property of *space* is "Number" then,
 - i. Let *space* be *ToNumber(space)*.
 - b. Else if the *[[Class]]* internal property of *space* is "String" then,
 - i. Let *space* be *ToString(space)*.
4. If *Type(space)* is number
 - a. Let *space* be the lesser of *space* and 100.
 - b. Set *gap* to a string containing *space* space characters. This will be the empty string if *space* is less than 1.
5. Else if *Type(space)* is string
 - a. Set *gap* to *space*.
6. Else
 - a. Set *gap* to the empty string.
7. Let *wrapper* be a new object created as if by the expression `new Object()`, where *Object* is the standard built-in constructor with that name.
8. Call the *[[Put]]* internal method of *wrapper* with arguments the empty string and *value*.
9. Return the result of calling the abstract operation *Str* with the empty string and *wrapper*.

The abstract operation *Str(key, holder)* has access to *replacer* from the invocation of the *stringify* method. Its algorithm is as follows:

1. Let *value* be the result of calling the *[[Get]]* internal method of *holder* with argument *key*.
2. If *Type(value)* is object, then
 - a. Let *toJSON* be the result of calling the *[[Get]]* internal method of *value* with argument "toJSON".
 - b. If *IsCallable(toJSON)* is true,
 - i. Let *value* be the result of calling the *[[Call]]* internal method of *toJSON* passing *value* as the *this* value and with an argument list consisting of *key*.
3. If *IsCallable(replacer)* is true
 - a. Let *value* be the result of calling the *[[Call]]* internal method of *replacer* passing *holder* as the *this* value and with an argument list consisting of *key* and *value*.
4. If *value* is null then return "null".
5. If *value* is true then return "true".
6. If *value* is false then return "false".
7. If *Type(value)* is object then,
 - a. If the *[[Class]]* internal property of *value* is "Number" then,
 - i. Let *value* be *ToNumber(value)*.
 - b. Else if the *[[Class]]* internal property of *value* is "String" then,
 - i. Let *value* be *ToString(value)*.
8. If *Type(value)* is string, then return the result of calling the abstract operation *Quote* with argument *value*.
9. If *Type(value)* is number
 - a. If *value* is finite then return *value*.
 - b. else, return "null".
10. If *Type(value)* is object, and *IsCallable(value)* is false
 - a. If the *[[Class]]* internal property of *value* is "Array" then,
 - i. Return the result of calling the abstract operation *JA* with argument *value*.
 - b. Return the result of calling the abstract operation *JO* with argument *value*.
11. Return undefined.

The abstract operation *Quote(value)* wraps a string value in double quotes and escapes characters within it.

1. Let *product* be the double quote character.
2. For each character *C* in *value*
 - a. If *C* is the double quote character or the backslash character

```
Deleted: JSON structures are allowed to be
nested to any depth, but they must be acyclic. If
the value is a cyclic structure, then the stringify
function must throw an Error. This is an
example of a value that cannot be stringified.
a = [];
a[0] = a;
my_text = JSON.stringify(a); //
This must throw an Error.
The null value is rendered in JSON text as the
string null.
The true value is rendered in JSON text as the
string true.
```

Deleted: [

Deleted: Result(1

Deleted:)

Deleted: a n

Deleted: a

Deleted: Create

Deleted: new Object by the original Object

Deleted: Result(7)

Deleted: the

Deleted: Call

Deleted: Result(7)

Deleted: <#>Return Result(9).

Deleted: internal

Deleted: the

Deleted: Call

Deleted: <#>Let value be Result(1).

Deleted: an

Deleted: Call

Deleted: on

Deleted: Result(3.a)

Deleted: Call Result(3.a) as a metho

Deleted: <#>Let value be Result(3.b.1).

Deleted: Call replacer as a method of

Deleted: <#>Let value be Result(4.a).

Deleted: value

Deleted: a

Deleted: value

Deleted: a

Deleted: R

Deleted: value

Deleted: an

Deleted: Call

Deleted: <#>Return Result(10.a.1).

Deleted: Call

Deleted: <#>Return Result(10.b).

Deleted: Result(2)

- i. Let *product* be the concatenation of *product* and the backslash character.
- ii. Let *product* be the concatenation of *product* and *C*.
- b. Else If *C* is backspace, formfeed, newline, carriage return, or tab
 - i. Let *product* be the concatenation of *product* and the backslash character.
 - ii. Let *abbrev* be the character corresponding to the value of *C* in the following table:

backspace	"b"
formfeed	"f"
newline	"n"
carriage return	"r"
tab	"t"

- iii. Let *product* be the concatenation of *product* and *abbrev*.
 - c. Else If *C* is a control character having a *code* unit value less than the space character
 - i. Let *product* be the concatenation of *product* and the backslash character.
 - ii. Let *product* be the concatenation of *product* and "u".
 - iii. Let *hex* be the result of converting the numeric code unit value of *C* to a string of 4 base 16 digits.
 - iv. Let *product* be the concatenation of *product* and *hex*.
 - d. Else
 - i. Let *product* be the concatenation of *product* and *C*.
3. Let *product* be the concatenation of *product* and the double quote character.
 4. Return *product*.

The abstract operation *JO(value)* serializes an object. It has access to the *stack*, *indent*, *gap*, *replacer*, and *space* of the invocation of the stringify method.

1. If *stack* contains *value* then throw an **TypeError** exception because the structure is cyclical.
2. Append *value* to *stack*.
3. Let *stepback* be *indent*.
4. Let *indent* be the concatenation of *indent* and *gap*.
5. If *Type(replacer)* is object and the *[[Class]]* internal property of *replacer* is "Array", then
 - a. Let *K* be an internal List consisting of the values of those properties of *replacer* that have array index names. The elements of the list are in ascending array index order.
6. Else
 - a. Let *K* be an internal List of strings consisting of the names of all the own properties of *value* whose *[[Enumerable]]* attribute is **true**. The ordering of the strings should be the same as that used by the *Object.key* standard built-in function.
7. Let *partial* be an empty List.
8. For each element *P* of *K*.
 - a. Let *strP* be the result of calling the abstract operation *str* with arguments *P* and *value*.
 - b. If *strP* is not **undefined**.
 - i. Let *member* be the result of calling the abstract operation *Quote* with argument *P*.
 - ii. Let *member* be the concatenation of *member* and the colon character.
 - iii. If *gap* is not the empty string
 - l. Let *member* be the concatenation of *member* and the *space* character.
 - iv. Let *member* be the concatenation of *member* and *strP*.
 - v. Append *member* to *partial*.
9. If *partial* is empty then
 - a. Let *final* be "{ }".
10. Else
 - a. If *gap* is the empty string
 - i. Let *properties* be a string formed by concatenating all the element strings of *partial* with each adjacent pair of strings separated with the comma character. A comma is not inserted either before the first string or after the last string.
 - ii. Let *final* be the result of concatenating "{", *properties*, and "}".
 - b. Else *gap* is not the empty string
 - i. Let *separator* be the result of concatenating the comma character, the *line feed* character, and *indent*.

- Deleted: Result(2)
- Deleted: Result(2)
- Deleted: ¶
- Deleted: the lowercase letter b, f, n, r, or t.
- Deleted: Result(2)
- Deleted: the lowercase u character
- Deleted: Convert
- Deleted: Result(2)
- Deleted: Result(2.c.3)
- Deleted: Result(2)
- Deleted: <#>Call the original *indexOf* method of ...
- Deleted: Result(1) is not -1
- Deleted:
- Deleted: Push
- Deleted: on
- Deleted:
- Deleted: the
- Deleted: parameter
- Deleted: Call the original *Object.keys* method ...
- Deleted: <#>Let *K* be Result(6.a).¶
- Deleted: Result(8)
- Deleted: Call
- Deleted: function
- Deleted: Result(10)
- Deleted: Result(10.a)
- Deleted: Call
- Deleted: Result(10)
- Deleted: <#>Let *member* be Result(10.b.i).¶
- Deleted: <#>Else¶
- Deleted: the Result(10.a)
- Comment [MV+31]: continue here
- Deleted: Push Result(10.b.v) on
- Deleted: Length(
- Deleted:)
- Deleted: is 0
- Deleted: Call the original *join* method of ...
- Deleted: C
- Deleted: e
- Deleted: and Result(12.a.i)
- Deleted: <#>Set *final* to Result(12.a.ii).¶
- Deleted: C
- Deleted: e
- Deleted:
- Deleted: and
- Deleted: the

- ii. Let *properties* be a string formed by concatenating all the element strings of *partial* with each adjacent pair of strings separated with *separator*. The *separator* string is not inserted either before the first string or after the last string.
- iii. Let *final* be the result of concatenating "{", the line feed character, *indent*, *properties*, the line feed character, *stepback*, and "}".

11. Remove the last element of *stack*.
12. Let *indent* be *stepback*.
13. Return *final*.

The abstract operation *JA(value)* serializes an array. It has access to the *stack*, *indent*, *gap*, and *space* of the invocation of the *stringify* method. The representation of arrays includes only the elements between zero and *array.length - 1*. Named properties are excluded from the stringification. An array is stringified as an open left bracket, elements separated by comma, and a closing right bracket.

1. If *stack* contains *value* then throw an **TypeError** exception because the structure is cyclical.
2. Append *value* to *stack*.
3. Let *stepback* be *indent*.
4. Let *indent* be the concatenation of *indent* and *gap*.
5. Let *partial* be an empty List.
6. Let *len* be the result of calling the *[[Get]]* internal method of *value* with argument "length".
7. Let *index* be 0.
8. Repeat while *index* < *len*
 - a. Let *strP* be the result of calling the abstract operation *str* with arguments *ToString(index)* and *value*.
 - b. If *strP* is undefined
 - i. Append "null" to *partial*.
 - c. Else
 - i. Append *strP* to *partial*.
 - d. Increment *index* by 1.
9. If *partial* is empty then
 - a. Let *final* be "[]".
10. Else
 - a. If *gap* is the empty string
 - i. Let *properties* be a string formed by concatenating all the element strings of *partial* with each adjacent pair of strings separated with the comma character. A comma is not inserted either before the first string or after the last string.
 - ii. Let *final* be the result of concatenating "[", *properties*, and "]"
 - b. Else
 - i. Let *separator* be the result of concatenating the comma character, the line feed character, and *indent*.
 - ii. Let *properties* be a string formed by concatenating all the element strings of *partial* with each adjacent pair of strings separated with *separator*. The *separator* string is not inserted either before the first string or after the last string.
 - iii. Let *final* be the result of concatenating "{", the line feed character, *indent*, *properties*, the line feed character, *stepback*, and "}".
11. Remove the last element of *stack*.
12. Let *indent* be *stepback*.
13. Return *final*.

NOTE

JSON structures are allowed to be nested to any depth, but they must be acyclic. If *value* is or contains a cyclic structure, then the *stringify* function must throw an **TypeError** exception. This is an example of a value that cannot be stringified:

```
a = [];
a[0] = a;
my text = JSON.stringify(a); // This must throw an TypeError.
```

The null value is rendered in JSON text as the string null.

Deleted: Call the original join method of *partial* with Result(12.b.i).

Deleted: Concatenate

Deleted: and

Deleted: and

Deleted: and

Deleted: Result(12.b.ii)

Deleted: and

Deleted: and

Deleted:

Deleted: <#>Set *final* to Result(12.b.iii).¶

Pop

Deleted: the

Deleted: <#>Call the original *indexOf* method on *stack* with *value*.¶

Deleted: If Result(1) is not -1 then throw an Error because the structure is cyclical.

Deleted: Push *value* onto *stack*.

Deleted: <#>Create a new array by the original *Array* method.¶

Deleted: Let *partial* be Result(6).

Deleted: For each *index* in *value*.

Deleted: Call the *str* function with Result(8) and *value*.

Deleted: Result(8.a)

Deleted: Push

Deleted:

Deleted: on

Deleted: Push

Deleted: Result(8.a)

Deleted: If Length(*partial*) is 0 then

Deleted: Call the original join method of *partial* with the comma character.

Deleted: Concatenate "[" and Result(12.a.i) and "]"

Deleted: <#>Set *final* to Result(12.a.ii).¶

Deleted: Concatenate the comma character and the line feed character and *indent*.

Deleted: Call the original join method of *partial* with Result(10.b.i).

Deleted: Concatenate "]" and the line feed character and *indent* and Result(10.b.ii) and the line feed character and *stepback* and "]"

Deleted: <#>Set *final* to Result(10.b.iii).¶

Deleted: Pop the *stack*.

Deleted: ¶

The **true** value is rendered in JSON text as the string **true**.

The **false** value is rendered in JSON text as the string **false**.

String values are wrapped in double quotes. The characters " and \ are escaped with \ prefixes. Control characters are replaced with escape sequences \uHHHH, or with the shorter forms, \b (backspace), \f (formfeed), \n (newline), \r (carriage return), \t (tab).

Finite numbers are stringified as if by **String(number)**. NaN and Infinity regardless of sign are represented as the string **null**.

Values that do not have a JSON representation (such as **undefined** and functions) do not produce a string. Instead they produce the undefined value. In arrays these values are represented as the string **null**. In objects an unrepresentable value causes the property to be excluded from stringification.

An object is rendered as an opening left brace followed by zero or more properties, separated with commas, closed with a right brace. A property is a quoted string representing the key or property name, a colon, and then the stringified property value. An array is rendered as an opening left bracket followed by zero or more values, separated with commas, closed with a right bracket.

DRAFT

16 Errors

An implementation should report runtime errors at the time the relevant language construct is evaluated. An implementation may report syntax errors in the program at the time the program is read in, or it may, at its option, defer reporting syntax errors until the relevant statement is reached. An implementation may report syntax errors in `eval` code at the time `eval` is called, or it may, at its option, defer reporting syntax errors until the relevant statement is reached.

An implementation must treat any instance of the following kinds of runtime errors as a syntax error and therefore report it early:

Attempts to define an `ObjectLiteral` that has multiple `get` property assignments with the same name or multiple `set` property assignments with the same name.

Attempts to define an `ObjectLiteral` that has both a data property assignment and a `get` or `set` property assignment with the same name.

Errors in regular expression literals that are not implementation-defined syntax extensions.

Violation of strict mode restriction whose detection does not require program execution.

An implementation may treat any instance of the following kinds of runtime errors as a syntax error and therefore report it early:

Improper uses of `return`, `break`, and `continue`.

Using the `eval` property other than via a direct call.

Errors in regular expression literals.

Attempts to call `PutValue` on a value that is not a reference (for example, executing the assignment statement `3=4`).

An implementation shall not report other kinds of runtime errors early even if the compiler can prove that a construct cannot execute without error under any circumstances. An implementation may issue an early warning in such a case, but it should not report the error until the relevant construct is actually executed.

An implementation shall report all errors as specified, except for the following:

An implementation may extend program and regular expression syntax. To permit this, all operations (such as calling `eval`, using a regular expression literal, or using the `Function` or `RegExp` constructor) that are allowed to throw `SyntaxError` are permitted to exhibit implementation-defined behaviour instead of throwing `SyntaxError` when they encounter an implementation-defined extension to the program or regular expression syntax.

An implementation may provide additional types, values, objects, properties, and functions beyond those described in this specification. This may cause constructs (such as looking up a variable in the global scope) to have implementation-defined behaviour instead of throwing an error (such as `ReferenceError`).

An implementation may define behaviour other than throwing `RangeError` for `toFixed`, `toExponential`, and `toPrecision` when the `fractionDigits` or `precision` argument is outside the specified range.

Deleted: an accessor

Deleted: An implementation is not required to detect `EvalError`. If it chooses not to detect `EvalError`, the implementation must allow `eval` to be used indirectly and/or allow assignments to `eval`.

Annex A
(informative)

Grammar Summary

A.1 Lexical Grammar

SourceCharacter :: See clause 6
any Unicode character

InputElementDiv :: See clause 7
WhiteSpace
LineTerminator
Comment
Token
DivPunctuator

Deleted: 6

InputElementRegExp :: See clause 7
WhiteSpace
LineTerminator
Comment
Token
RegularExpressionLiteral

Deleted: 6

WhiteSpace :: See 7.2
<TAB>
<VT>
<FF>
<SP>
<NEL>
<NBSP>
<ZWSP>
<BOM>
<USP>

LineTerminator :: See 7.3
<LF>
<CR>
<LS>
<PS>

LineTerminatorSequence :: See 7.3
<LF>
<CR> [lookahead ≠ <LF>]
<LS>
<PS>
<CR> <LF>

Comment :: See 7.4
MultiLineComment
SingleLineComment

MultiLineComment :: See 7.4
/* MultiLineCommentChars_{opt} */

MultiLineCommentChars :: See 7.4
MultiLineNotAsteriskChar MultiLineCommentChars_{opt}
* PostAsteriskCommentChars_{opt}

PostAsteriskCommentChars :: See 7.4
MultiLineNotForwardSlashOrAsteriskChar MultiLineCommentChars_{opt}
* PostAsteriskCommentChars_{opt}

MultiLineNotAsteriskChar :: See 7.4
SourceCharacter **but not** asterisk *

MultiLineNotForwardSlashOrAsteriskChar :: See 7.4
SourceCharacter **but not** forward-slash / **or** asterisk *

SingleLineComment :: See 7.4
// SingleLineCommentChars_{opt}

SingleLineCommentChars :: See 7.4
SingleLineCommentChar SingleLineCommentChars_{opt}

SingleLineCommentChar :: See 7.4
SourceCharacter **but not** LineTerminator

Token :: See 7.5
IdentifierName
Punctuator
NumericLiteral
StringLiteral

ReservedWord :: See 7.5.1
Keyword
FutureReservedWord
NullLiteral
BooleanLiteral

Keyword :: one of See 7.5.2
break do instanceof typeof
case else new var
catch finally return void
continue for switch while
debugger function this with
default if throw
delete in try

FutureReservedWord :: one of See 7.5.3
abstract export interface static

- Deleted: ReservedWord
- Deleted: Identifier
- Deleted: else
- Deleted: new
- Deleted: var
- Deleted: finally
- Deleted: return
- Deleted: void
- Deleted: for
- Deleted: switch
- Deleted: while
- Deleted: function
- Deleted: this
- Deleted: with
- Deleted: default
- Deleted: if
- Deleted: throw
- Deleted: debugger
- Deleted: delete
- Deleted: in
- Deleted: try
- Deleted: do
- Deleted: instanceof
- Deleted: typeof
- Deleted: enum
- Deleted: int
- Deleted: short

<code>boolean</code>	<code><u>extends</u></code>	<code><u>long</u></code>	<code><u>super</u></code>
<code>byte</code>	<code><u>final</u></code>	<code><u>native</u></code>	<code><u>synchronized</u></code>
<code>char</code>	<code><u>float</u></code>	<code><u>package</u></code>	<code><u>throws</u></code>
<code>class</code>	<code><u>goto</u></code>	<code><u>private</u></code>	<code><u>transient</u></code>
<code>const</code>	<code><u>implements</u></code>	<code><u>protected</u></code>	<code><u>volatile</u></code>
<code><u>double</u></code>	<code><u>import</u></code>	<code><u>public</u></code>	
<code><u>enum</u></code>	<code><u>int</u></code>	<code><u>short</u></code>	

- Deleted: export
- Deleted: interface
- Deleted: static
- Deleted: extends
- Deleted: long
- Deleted: super
- Deleted: final
- Deleted: native
- Deleted: synchronized
- Deleted: float
- Deleted: package
- Deleted: throws
- Deleted: goto
- Deleted: private
- Deleted: transient
- Deleted: debugger
- Deleted: implements
- Deleted: protected
- Deleted: volatile
- Deleted: double
- Deleted: import
- Deleted: public

Identifier :: See 7.6
IdentifierName **but not** *ReservedWord*

IdentifierName :: See 7.6
IdentifierStart
IdentifierName *IdentifierPart*

IdentifierStart :: See 7.6
UnicodeLetter
 \$
UnicodeEscapeSequence

IdentifierPart :: See 7.6
IdentifierStart
UnicodeCombiningMark
UnicodeDigit
UnicodeConnectorPunctuation
UnicodeEscapeSequence

UnicodeLetter See 7.6
 any character in the Unicode categories “Uppercase letter (Lu)”, “Lowercase letter (Ll)”, “Titlecase letter (Lt)”, “Modifier letter (Lm)”, “Other letter (Lo)”, or “Letter number (Nl)”.

UnicodeCombiningMark See 7.6
 any character in the Unicode categories “Non-spacing mark (Mn)” or “Combining spacing mark (Mc)”

UnicodeDigit See 7.6
 any character in the Unicode category “Decimal number (Nd)”

UnicodeConnectorPunctuation See 7.6
 any character in the Unicode category “Connector punctuation (Pc)”

UnicodeEscapeSequence :: See 7.6

`\u HexDigit HexDigit HexDigit HexDigit`

HexDigit :: one of See 7.6
 0 1 2 3 4 5 6 7 8 9 a b c d e f A B C D E F

Punctuator :: one of See 7.7

{	}	()	[]
.	;	,	<	>	<=
>=	==	!=	===	!==	
+	-	*	%	++	--

<<	>>	>>>	&		^
!	~	&&		?	:
=	+=	-=	*=	%=	<<=
>>=	>>>=	&=	=	^=	
{	}	()	[]

DivPunctuator :: one of / /= See 7.7

Literal :: See 7.8
NullLiteral
BooleanLiteral
NumericLiteral
StringLiteral

NullLiteral :: See 7.8.1
null

BooleanLiteral :: See 7.8.2
true
false

NumericLiteral :: See 7.8.3
DecimalLiteral
HexIntegerLiteral

DecimalLiteral :: See 7.8.3
DecimalIntegerLiteral . DecimalDigits_{opt} ExponentPart_{opt}
. DecimalDigits ExponentPart_{opt}
DecimalIntegerLiteral ExponentPart_{opt}

DecimalIntegerLiteral :: See 7.8.3
0
NonZeroDigit DecimalDigits_{opt}

DecimalDigits :: See 7.8.3
DecimalDigit
DecimalDigits DecimalDigit

DecimalDigit :: one of See 7.8.3
0 1 2 3 4 5 6 7 8 9

ExponentIndicator :: one of See 7.8.3
e E

<i>SignedInteger</i> :: <i>DecimalDigits</i> + <i>DecimalDigits</i> - <i>DecimalDigits</i>	<i>See 7.8.3</i>
<i>HexIntegerLiteral</i> :: 0x <i>HexDigit</i> 0X <i>HexDigit</i> <i>HexIntegerLiteral</i> <i>HexDigit</i>	<i>See 7.8.3</i>
<i>StringLiteral</i> :: " <i>DoubleStringCharacters</i> _{opt} " ' <i>SingleStringCharacters</i> _{opt} '	<i>See 7.8.4</i>
<i>DoubleStringCharacters</i> :: <i>DoubleStringCharacter</i> <i>DoubleStringCharacters</i> _{opt}	<i>See 7.8.4</i>
<i>SingleStringCharacters</i> :: <i>SingleStringCharacter</i> <i>SingleStringCharacters</i> _{opt}	<i>See 7.8.4</i>
<i>DoubleStringCharacter</i> :: <i>SourceCharacter</i> but not double-quote " or backslash \ or <i>LineTerminator</i> \ <i>EscapeSequence</i> <u><i>LineContinuation</i></u>	<i>See 7.8.4</i>
<i>SingleStringCharacter</i> :: <i>SourceCharacter</i> but not single-quote ' or backslash \ or <i>LineTerminator</i> \ <i>EscapeSequence</i> <u><i>LineContinuation</i></u>	<i>See 7.8.4</i>
<u><i>LineContinuation</i> :: \ <i>LineTerminatorSequence</i></u>	<u><i>See 7.8.4</i></u>
<i>EscapeSequence</i> :: <i>CharacterEscapeSequence</i> 0 [lookahead ∉ <i>DecimalDigit</i>] <i>HexEscapeSequence</i> <i>UnicodeEscapeSequence</i>	<i>See 7.8.4</i>
<i>CharacterEscapeSequence</i> :: <i>SingleEscapeCharacter</i> <i>NonEscapeCharacter</i>	<i>See 7.8.4</i>
<i>SingleEscapeCharacter</i> :: one of ' " \ b f n r t v	<i>See 7.8.4</i>

<u><i>NonEscapeCharacter</i></u> :: <i>SourceCharacter</i> but not <i>EscapeCharacter</i> or <i>LineTerminator</i>	<i>See 7.8.4</i>
<i>EscapeCharacter</i> :: <i>SingleEscapeCharacter</i> <i>DecimalDigit</i> x u	<i>See 7.8.4</i>
<i>HexEscapeSequence</i> :: x <i>HexDigit</i> <i>HexDigit</i>	<i>See 7.8.4</i>
<i>UnicodeEscapeSequence</i> :: u <i>HexDigit</i> <i>HexDigit</i> <i>HexDigit</i> <i>HexDigit</i>	<i>See 7.8.4</i>
<i>RegularExpressionLiteral</i> :: <i>RegularExpressionBody</i> / <i>RegularExpressionFlags</i>	<i>See 7.8.5</i>
<i>RegularExpressionBody</i> :: <i>RegularExpressionFirstChar</i> <i>RegularExpressionChars</i>	<i>See 7.8.5</i>
<i>RegularExpressionChars</i> :: [empty] <i>RegularExpressionChars</i> <i>RegularExpressionChar</i>	<i>See 7.8.5</i>
<i>RegularExpressionFirstChar</i> :: <i>NonTerminator</i> but not * or \ or / <u><i>or</i></u> [<i>BackslashSequence</i> <i>RegularExpressionClass</i>	<i>See 7.8.5</i>
<i>RegularExpressionChar</i> :: <i>NonTerminator</i> but not \ or / <u><i>or</i></u> [<i>BackslashSequence</i> <i>RegularExpressionClass</i>	<i>See 7.8.5</i>
<i>BackslashSequence</i> :: \ <i>NonTerminator</i>	<i>See 7.8.5</i>
<i>NonTerminator</i> :: <i>SourceCharacter</i> but not <i>LineTerminator</i>	<i>See 7.8.5</i>
<u><i>RegularExpressionClass</i></u> :: <u>[<i>RegularExpressionClassChars</i>]</u>	<i>See 7.8.5</i>
<u><i>RegularExpressionClassChars</i></u> :: [empty] <u><i>RegularExpressionClassChars</i> <i>RegularExpressionClassChar</i></u>	<i>See 7.8.5</i>

Deleted: *RegularExpressionClassPreamble*

Deleted: *RegularExpressionClassPreamble*
:: *See 7.8.5*¶
[empty]
^
-
^¶

~~RegularExpressionClassChar :::
NonTerminator but not | or \ BackslashSequence~~ See 7.8.5

Deleted: or -
- RegularExpressionClassChar
BackslashExpression

RegularExpressionFlags :::
[empty] See 7.8.5
RegularExpressionFlags IdentifierPart

A.2 Number Conversions

StringNumericLiteral ::: See 9.3.1
StrWhiteSpace_{opt}
StrWhiteSpace_{opt} StrNumericLiteral StrWhiteSpace_{opt}

StrWhiteSpace ::: See 9.3.1
StrWhiteSpaceChar StrWhiteSpace_{opt}

StrWhiteSpaceChar ::: See 9.3.1
~~WhiteSpace~~
~~LineTerminator~~

Deleted: <TAB>
<SP>
<NBSP>
<FF>
<VT>
<CR>
<LF>
<LS>
<PS>
<USP>

StrNumericLiteral ::: See 9.3.1
StrDecimalLiteral
HexIntegerLiteral

StrDecimalLiteral ::: See 9.3.1
StrUnsignedDecimalLiteral
+ StrUnsignedDecimalLiteral
- StrUnsignedDecimalLiteral

StrUnsignedDecimalLiteral ::: See 9.3.1
Infinity
DecimalDigits . DecimalDigits_{opt} ExponentPart_{opt}
. DecimalDigits ExponentPart_{opt}
DecimalDigits ExponentPart_{opt}

DecimalDigits ::: See 9.3.1
DecimalDigit
DecimalDigits DecimalDigit

DecimalDigit ::: one of See 9.3.1
0 1 2 3 4 5 6 7 8 9

ExponentPart ::: See 9.3.1
ExponentIndicator SignedInteger

ExponentIndicator ::: one of See 9.3.1
e E

SignedInteger ::: See 9.3.1
DecimalDigits
+ *DecimalDigits*
- *DecimalDigits*

HexIntegerLiteral ::: See 9.3.1
0x *HexDigit*
0X *HexDigit*
HexIntegerLiteral *HexDigit*

HexDigit ::: one of See 9.3.1
0 1 2 3 4 5 6 7 8 9 a b c d e f A B C D E F

A.3 Expressions

PrimaryExpression : See 11.1
this
Identifier
Literal
ArrayLiteral
ObjectLiteral
(*Expression*)

ArrayLiteral : See 11.1.4
[*Elision*_{opt}]
[*ElementList*]
[*ElementList* , *Elision*_{opt}]

ElementList : See 11.1.4
*Elision*_{opt} *AssignmentExpression*
ElementList , *Elision*_{opt} *AssignmentExpression*

Elision : See 11.1.4
,
Elision ,

ObjectLiteral : See 11.1.5
{ }
{ *PropertyNameAndValueList* }
{ *PropertyNameAndValueList* , }

PropertyNameAndValueList : See 11.1.5
PropertyAssignment
PropertyNameAndValueList , *PropertyAssignment*

PropertyAssignment : See 11.1.5
PropertyName : *AssignmentExpression*
get *PropertyName* () { *FunctionBody* }
set *PropertyName* (*PropertySetParameterList*) { *FunctionBody* },

Deleted: *PropertyNameAndValueList* ,
Deleted: : *AssignmentExpression*

PropertyName : *See 11.1.5*
*Identifier***Name**
StringLiteral
NumericLiteral

PropertySetParameterList : *See 11.1.5*
Identifier

Deleted: ¶

MemberExpression : *See 11.2*
PrimaryExpression
FunctionExpression
MemberExpression [*Expression*]
MemberExpression . *Identifier***Name**
new *MemberExpression* *Arguments*

NewExpression : *See 11.2*
MemberExpression
new *NewExpression*

CallExpression : *See 11.2*
MemberExpression *Arguments*
CallExpression *Arguments*
CallExpression [*Expression*]
CallExpression . *Identifier***Name**

Arguments : *See 11.2*
()
(*ArgumentList*)

ArgumentList : *See 11.2*
AssignmentExpression
ArgumentList , *AssignmentExpression*

LeftHandSideExpression : *See 11.2*
NewExpression
CallExpression

PostfixExpression : *See 11.3*
LeftHandSideExpression
LeftHandSideExpression [no *LineTerminator* here] ++
LeftHandSideExpression [no *LineTerminator* here] --

<i>UnaryExpression</i> :	<i>See 11.4</i>
<i>PostfixExpression</i>	
delete <i>UnaryExpression</i>	
void <i>UnaryExpression</i>	
typeof <i>UnaryExpression</i>	
++ <i>UnaryExpression</i>	
-- <i>UnaryExpression</i>	
+ <i>UnaryExpression</i>	
- <i>UnaryExpression</i>	
~ <i>UnaryExpression</i>	
! <i>UnaryExpression</i>	
<i>MultiplicativeExpression</i> :	<i>See 11.5</i>
<i>UnaryExpression</i>	
<i>MultiplicativeExpression</i> * <i>UnaryExpression</i>	
<i>MultiplicativeExpression</i> / <i>UnaryExpression</i>	
<i>MultiplicativeExpression</i> % <i>UnaryExpression</i>	
<i>AdditiveExpression</i> :	<i>See 11.6</i>
<i>MultiplicativeExpression</i>	
<i>AdditiveExpression</i> + <i>MultiplicativeExpression</i>	
<i>AdditiveExpression</i> - <i>MultiplicativeExpression</i>	
<i>ShiftExpression</i> :	<i>See 11.7</i>
<i>AdditiveExpression</i>	
<i>ShiftExpression</i> << <i>AdditiveExpression</i>	
<i>ShiftExpression</i> >> <i>AdditiveExpression</i>	
<i>ShiftExpression</i> >>> <i>AdditiveExpression</i>	
<i>RelationalExpression</i> :	<i>See 11.8</i>
<i>ShiftExpression</i>	
<i>RelationalExpression</i> < <i>ShiftExpression</i>	
<i>RelationalExpression</i> > <i>ShiftExpression</i>	
<i>RelationalExpression</i> <= <i>ShiftExpression</i>	
<i>RelationalExpression</i> >= <i>ShiftExpression</i>	
<i>RelationalExpression</i> instanceof <i>ShiftExpression</i>	
<i>RelationalExpression</i> in <i>ShiftExpression</i>	
<i>RelationalExpressionNoIn</i> :	<i>See 11.8</i>
<i>ShiftExpression</i>	
<i>RelationalExpressionNoIn</i> < <i>ShiftExpression</i>	
<i>RelationalExpressionNoIn</i> > <i>ShiftExpression</i>	
<i>RelationalExpressionNoIn</i> <= <i>ShiftExpression</i>	
<i>RelationalExpressionNoIn</i> >= <i>ShiftExpression</i>	
<i>RelationalExpressionNoIn</i> instanceof <i>ShiftExpression</i>	
<i>EqualityExpression</i> :	<i>See 11.9</i>
<i>RelationalExpression</i>	
<i>EqualityExpression</i> == <i>RelationalExpression</i>	
<i>EqualityExpression</i> != <i>RelationalExpression</i>	
<i>EqualityExpression</i> === <i>RelationalExpression</i>	
<i>EqualityExpression</i> !== <i>RelationalExpression</i>	

<i>EqualityExpressionNoIn :</i> <i>RelationalExpressionNoIn</i> <i>EqualityExpressionNoIn == RelationalExpressionNoIn</i> <i>EqualityExpressionNoIn != RelationalExpressionNoIn</i> <i>EqualityExpressionNoIn === RelationalExpressionNoIn</i> <i>EqualityExpressionNoIn !== RelationalExpressionNoIn</i>	<i>See 11.9</i>
<i>BitwiseANDExpression :</i> <i>EqualityExpression</i> <i>BitwiseANDExpression & EqualityExpression</i>	<i>See 11.10</i>
<i>BitwiseANDExpressionNoIn :</i> <i>EqualityExpressionNoIn</i> <i>BitwiseANDExpressionNoIn & EqualityExpressionNoIn</i>	<i>See 11.10</i>
<i>BitwiseXORExpression :</i> <i>BitwiseANDExpression</i> <i>BitwiseXORExpression ^ BitwiseANDExpression</i>	<i>See 11.10</i>
<i>BitwiseXORExpressionNoIn :</i> <i>BitwiseANDExpressionNoIn</i> <i>BitwiseXORExpressionNoIn ^ BitwiseANDExpressionNoIn</i>	<i>See 11.10</i>
<i>BitwiseORExpression :</i> <i>BitwiseXORExpression</i> <i>BitwiseORExpression BitwiseXORExpression</i>	<i>See 11.10</i>
<i>BitwiseORExpressionNoIn :</i> <i>BitwiseXORExpressionNoIn</i> <i>BitwiseORExpressionNoIn BitwiseXORExpressionNoIn</i>	<i>See 11.10</i>
<i>LogicalANDExpression :</i> <i>BitwiseORExpression</i> <i>LogicalANDExpression && BitwiseORExpression</i>	<i>See 11.11</i>
<i>LogicalANDExpressionNoIn :</i> <i>BitwiseORExpressionNoIn</i> <i>LogicalANDExpressionNoIn && BitwiseORExpressionNoIn</i>	<i>See 11.11</i>
<i>LogicalORExpression :</i> <i>LogicalANDExpression</i> <i>LogicalORExpression LogicalANDExpression</i>	<i>See 11.11</i>
<i>LogicalORExpressionNoIn :</i> <i>LogicalANDExpressionNoIn</i> <i>LogicalORExpressionNoIn LogicalANDExpressionNoIn</i>	<i>See 11.11</i>

<i>ConditionalExpression</i> :	<i>See 11.12</i>
<i>LogicalORExpression</i>	
<i>LogicalORExpression</i> ? <i>AssignmentExpression</i> : <i>AssignmentExpression</i>	
<i>ConditionalExpressionNoIn</i> :	<i>See 11.12</i>
<i>LogicalORExpressionNoIn</i>	
<i>LogicalORExpressionNoIn</i> ? <i>AssignmentExpressionNoIn</i> : <i>AssignmentExpressionNoIn</i>	
<i>AssignmentExpression</i> :	<i>See 11.13</i>
<i>ConditionalExpression</i>	
<i>LeftHandSideExpression</i> <i>AssignmentOperator</i> <i>AssignmentExpression</i>	
<i>AssignmentExpressionNoIn</i> :	<i>See 11.13</i>
<i>ConditionalExpressionNoIn</i>	
<i>LeftHandSideExpression</i> <i>AssignmentOperator</i> <i>AssignmentExpressionNoIn</i>	
<i>AssignmentOperator</i> : one of	<i>See 11.13</i>
= * = / = % = + = - = << = >> = >>> = & = ^ = =	
<i>Expression</i> :	<i>See 11.14</i>
<i>AssignmentExpression</i>	
<i>Expression</i> , <i>AssignmentExpression</i>	
<i>ExpressionNoIn</i> :	<i>See 11.14</i>
<i>AssignmentExpressionNoIn</i>	
<i>ExpressionNoIn</i> , <i>AssignmentExpressionNoIn</i>	
A.4 Statements	
<i>Statement</i> :	<i>See clause 12</i>
<i>Block</i>	
<i>VariableStatement</i>	
<i>EmptyStatement</i>	
<i>ExpressionStatement</i>	
<i>IfStatement</i>	
<i>IterationStatement</i>	
<i>ContinueStatement</i>	
<i>BreakStatement</i>	
<i>ReturnStatement</i>	
<i>WithStatement</i>	
<i>LabelledStatement</i>	
<i>SwitchStatement</i>	
<i>ThrowStatement</i>	
<i>TryStatement</i>	
<i><u>DebuggerStatement</u></i>	
<i>Block</i> :	<i>See 12.1</i>
{ <i>StatementList</i> _{opt} }	
<i>StatementList</i> :	<i>See 12.1</i>
<i>Statement</i>	
<i>StatementList</i> <i>Statement</i>	

<i>VariableStatement</i> :	<i>See 12.2</i>
var <i>VariableDeclarationList</i> ;	
<i>VariableDeclarationList</i> :	<i>See 12.2</i>
<i>VariableDeclaration</i> <i>VariableDeclarationList</i> , <i>VariableDeclaration</i>	
<i>VariableDeclarationListNoIn</i> :	<i>See 12.2</i>
<i>VariableDeclarationNoIn</i> <i>VariableDeclarationListNoIn</i> , <i>VariableDeclarationNoIn</i>	
<i>VariableDeclaration</i> :	<i>See 12.2</i>
<i>Identifier</i> <i>Initialiser</i> _{opt}	
<i>VariableDeclarationNoIn</i> :	<i>See 12.2</i>
<i>Identifier</i> <i>InitialiserNoIn</i> _{opt}	
<i>Initialiser</i> :	<i>See 12.2</i>
= <i>AssignmentExpression</i>	
<i>InitialiserNoIn</i> :	<i>See 12.2</i>
= <i>AssignmentExpressionNoIn</i>	
<i>EmptyStatement</i> :	<i>See 12.3</i>
;	
<i>ExpressionStatement</i> :	<i>See 12.4</i>
[lookahead ∉ { { , function }] <i>Expression</i> ;	
<i>IfStatement</i> :	<i>See 12.5</i>
if (<i>Expression</i>) <i>Statement</i> else <i>Statement</i> if (<i>Expression</i>) <i>Statement</i>	
<i>IterationStatement</i> :	<i>See 12.6</i>
do <i>Statement</i> while (<i>Expression</i>) ; while (<i>Expression</i>) <i>Statement</i> for (<i>ExpressionNoIn</i> _{opt} ; <i>Expression</i> _{opt} ; <i>Expression</i> _{opt}) <i>Statement</i> for (var <i>VariableDeclarationListNoIn</i> ; <i>Expression</i> _{opt} ; <i>Expression</i> _{opt}) <i>Statement</i> for (<i>LeftHandSideExpression</i> in <i>Expression</i>) <i>Statement</i> for (var <i>VariableDeclarationNoIn</i> in <i>Expression</i>) <i>Statement</i>	
<i>ContinueStatement</i> :	<i>See 12.7</i>
continue [no <i>LineTerminator</i> here] <i>Identifier</i> _{opt} ;	
<i>BreakStatement</i> :	<i>See 12.8</i>
break [no <i>LineTerminator</i> here] <i>Identifier</i> _{opt} ;	

ReturnStatement : *See 12.9*
return [no *LineTerminator* here] *Expression*_{opt} ;

WithStatement : *See 12.10*
with (*Expression*) *Statement*

SwitchStatement : *See 12.11*
switch (*Expression*) *CaseBlock*

CaseBlock : *See 12.11*
{ *CaseClauses*_{opt} }
{ *CaseClauses*_{opt} *DefaultClause* *CaseClauses*_{opt} }

CaseClauses : *See 12.11*
CaseClause
CaseClauses *CaseClause*

CaseClause : *See 12.11*
case *Expression* : *StatementList*_{opt}

DefaultClause : *See 12.11*
default : *StatementList*_{opt}

LabelledStatement : *See 12.12*
Identifier : *Statement*

ThrowStatement : *See 12.13*
throw [no *LineTerminator* here] *Expression* ;

TryStatement : *See 12.14*
try *Block* *Catch*
try *Block* *Finally*
try *Block* *Catch* *Finally*

Catch : *See 12.14*
catch (*Identifier*) *Block*

Finally : *See 12.14*
finally *Block*

DebuggerStatement : *See 12.15*
debugger ;

A.5 Functions and Programs

FunctionDeclaration : *See clause 13*
function *Identifier* (*FormalParameterList*_{opt}) { *FunctionBody* }

FunctionExpression : *See clause 13*
function *Identifier*_{opt} (*FormalParameterList*_{opt}) { *FunctionBody* }

FormalParameterList : *See clause 13*
Identifier
FormalParameterList , *Identifier*

FunctionBody : *See clause 13*
SourceElements

Program : *See clause 14*
SourceElements

SourceElements : *See clause 14*
SourceElement
SourceElements *SourceElement*

SourceElement : *See clause 14*
Statement
FunctionDeclaration

~~*UseStrictDirective* : *See clause 14.1*
[no *LineTerminator* here] **use** [no *LineTerminator* here] **strict** [no *LineTerminator* here] *useExtension*_{opt}~~

~~*useExtension* : *See clause 14.1*
[no *LineTerminator* here] *ArbitraryInputElements*_{opt}~~

~~*ArbitraryInputElements* : *See clause 14.1*
[any sequence of lexical input elements that does not include any *LineTerminator* elements]~~

A.6 Universal Resource Identifier Character Classes

uri ::: *See 15.1.3*
*uriCharacters*_{opt}

uriCharacters ::: *See 15.1.3*
uriCharacter *uriCharacters*_{opt}

uriCharacter ::: *See 15.1.3*
uriReserved
uriUnescaped
uriEscaped

uriReserved ::: **one of** *See 15.1.3*
; / ? : @ & = + \$,

uriUnescaped ::: *See 15.1.3*
uriAlpha
DecimalDigit
uriMark

uriEscaped ::: See 15.1.3
% HexDigit HexDigit

uriAlpha ::: one of See 15.1.3
a b c d e f g h i j k l m n o p q r s t u v w x y z
A B C D E F G H I J K L M N O P Q R S T U V W X Y Z

uriMark ::: one of See 15.1.3
- _ . ! ~ * ' ()

Deleted: ' ()

A.7 Regular Expressions

Pattern :: See 15.10.1
Disjunction

Disjunction :: See 15.10.1
Alternative
Alternative | Disjunction

Alternative :: See 15.10.1
[empty]
Alternative Term

Term :: See 15.10.1
Assertion
Atom
Atom Quantifier

Assertion :: See 15.10.1
^
\$
\ b
\ B
[\(? = Disjunction \)](#)
[\(? ! Disjunction \)](#)

Quantifier :: See 15.10.1
QuantifierPrefix
QuantifierPrefix ?

QuantifierPrefix :: See 15.10.1
*
+
?
{ DecimalDigits }
{ DecimalDigits , }
{ DecimalDigits , DecimalDigits }

Atom :: *PatternCharacter* *See 15.10.1*
 .
 \ *AtomEscape*
CharacterClass
 (*Disjunction*)
 (? : *Disjunction*)

PatternCharacter :: *SourceCharacter* but not any of: *See 15.10.1*
 ^ \$ \ . * + ? () [] { } |

Deleted:
 (? = *Disjunction*)
 (? ! *Disjunction*)

AtomEscape :: *See 15.10.1*
DecimalEscape
CharacterEscape
CharacterClassEscape

CharacterEscape :: *See 15.10.1*
ControlEscape
 c *ControlLetter*
HexEscapeSequence
UnicodeEscapeSequence
IdentityEscape

ControlEscape :: one of *See 15.10.1*
 f n r t v

ControlLetter :: one of *See 15.10.1*
 a b c d e f g h i j k l m n o p q r s t u v w x y z
 A B C D E F G H I J K L M N O P Q R S T U V W X Y Z

IdentityEscape :: *See 15.10.1*
SourceCharacter but not *IdentifierPart*

DecimalEscape :: *See 15.10.1*
DecimalIntegerLiteral [lookahead ≠ *DecimalDigit*]

CharacterClass :: *See 15.10.1*
 [[lookahead ≠ {^}] *ClassRanges*]
 [^ *ClassRanges*]

ClassRanges :: *See 15.10.1*
 [empty]
NonemptyClassRanges

NonemptyClassRanges :: *See 15.10.1*
ClassAtom
ClassAtom *NonemptyClassRangesNoDash*
ClassAtom - *ClassAtom* *ClassRanges*

Deleted: -

NonemptyClassRangesNoDash :: *See 15.10.1*
ClassAtom
ClassAtomNoDash NonemptyClassRangesNoDash
ClassAtomNoDash ~~↔~~ *ClassAtom ClassRanges*

Deleted: -

ClassAtom :: *See 15.10.1*
-
ClassAtomNoDash

ClassAtomNoDash :: *See 15.10.1*
SourceCharacter **but not one of \] -**
\
ClassEscape

ClassEscape :: *See 15.10.1*
DecimalEscape
b
CharacterEscape
CharacterClassEscape

DRAFT

DRAFT

Annex B (informative)

Compatibility

B.1 Additional Syntax

Past editions of ECMAScript have included additional syntax and semantics for specifying octal literals and octal escape sequences. These have been removed from this edition of ECMAScript. This non-normative annex presents uniform syntax and semantics for octal literals and octal escape sequences for compatibility with some older ECMAScript programs.

B.1.1 Numeric Literals

The syntax and semantics of 7.8.3 can be extended as follows:

Syntax

NumericLiteral ::
 DecimalLiteral
 HexIntegerLiteral
 OctalIntegerLiteral

OctalIntegerLiteral ::
 0 *OctalDigit*
 OctalIntegerLiteral *OctalDigit*

OctalDigit :: one of
0 1 2 3 4 5 6 7

Semantics

The MV of *NumericLiteral* :: *OctalIntegerLiteral* is the MV of *OctalIntegerLiteral*.

The MV of *OctalDigit* :: 0 is 0.

The MV of *OctalDigit* :: 1 is 1.

The MV of *OctalDigit* :: 2 is 2.

The MV of *OctalDigit* :: 3 is 3.

The MV of *OctalDigit* :: 4 is 4.

The MV of *OctalDigit* :: 5 is 5.

The MV of *OctalDigit* :: 6 is 6.

The MV of *OctalDigit* :: 7 is 7.

The MV of *OctalIntegerLiteral* :: 0 *OctalDigit* is the MV of *OctalDigit*.

The MV of *OctalIntegerLiteral* :: *OctalIntegerLiteral* *OctalDigit* is (the MV of *OctalIntegerLiteral* times 8) plus the MV of *OctalDigit*.

B.1.2 String Literals

The syntax and semantics of 7.8.4 can be extended as follows:

Syntax

EscapeSequence ::
 CharacterEscapeSequence
 OctalEscapeSequence
 HexEscapeSequence
 UnicodeEscapeSequence

OctalEscapeSequence ::

OctalDigit [lookahead ≠ *DecimalDigit*]

ZeroToThree OctalDigit [lookahead ≠ *DecimalDigit*]

FourToSeven OctalDigit

ZeroToThree OctalDigit OctalDigit

ZeroToThree :: one of

0 1 2 3

FourToSeven :: one of

4 5 6 7

Semantics

The CV of *EscapeSequence* :: *OctalEscapeSequence* is the CV of the *OctalEscapeSequence*.

The CV of *OctalEscapeSequence* :: *OctalDigit* [lookahead ≠ *DecimalDigit*] is the character whose code unit value is the MV of the *OctalDigit*.

The CV of *OctalEscapeSequence* :: *ZeroToThree OctalDigit* [lookahead ≠ *DecimalDigit*] is the character whose code unit value is (8 times the MV of the *ZeroToThree*) plus the MV of the *OctalDigit*.

The CV of *OctalEscapeSequence* :: *FourToSeven OctalDigit* is the character whose code unit value is (8 times the MV of the *FourToSeven*) plus the MV of the *OctalDigit*.

The CV of *OctalEscapeSequence* :: *ZeroToThree OctalDigit OctalDigit* is the character whose code unit value is (64 (that is, 8²) times the MV of the *ZeroToThree*) plus (8 times the MV of the first *OctalDigit*) plus the MV of the second *OctalDigit*.

The MV of *ZeroToThree* :: 0 is 0.

The MV of *ZeroToThree* :: 1 is 1.

The MV of *ZeroToThree* :: 2 is 2.

The MV of *ZeroToThree* :: 3 is 3.

The MV of *FourToSeven* :: 4 is 4.

The MV of *FourToSeven* :: 5 is 5.

The MV of *FourToSeven* :: 6 is 6.

The MV of *FourToSeven* :: 7 is 7.

Deleted: code point

Deleted: code point

Deleted: code point

Deleted: code point

B.2 Additional Properties

Some implementations of ECMAScript have included additional properties for some of the standard native objects. This non-normative annex suggests uniform semantics for such properties without making the properties or their semantics part of this standard.

B.2.1 escape (string)

The **escape** function is a property of the global object. It computes a new version of a string value in which certain characters have been replaced by a hexadecimal escape sequence.

For those characters being replaced whose code unit value is **0xFF** or less, a two-digit escape sequence of the form **%xx** is used. For those characters being replaced whose code unit value is greater than **0xFF**, a four-digit escape sequence of the form **%uxxxx** is used

Deleted: code point

Deleted: code point

When the **escape** function is called with one argument *string*, the following steps are taken:

1. Call **ToString**(*string*).
2. Compute the number of characters in **Result**(1).
3. Let *R* be the empty string.
4. Let *k* be 0.
5. If *k* equals **Result**(2), return *R*.
6. Get the character (represented as a 16-bit unsigned integer) at position *k* within **Result**(1).
7. If **Result**(6) is one of the 69 nonblank characters **"ABCDEFGHIJKLMN OPQRSTUVWXYZabcdefghijklmnopqrstuvwxyz0123456789@*_+-. /"** then go to step 13.

8. If Result(6), is less than 256, go to step 11.
9. Let *S* be a string containing six characters "%uwx^uyz" where wxyz are four hexadecimal digits encoding the value of Result(6).
10. Go to step 14.
11. Let *S* be a string containing three characters "%xy" where xy are two hexadecimal digits encoding the value of Result(6).
12. Go to step 14.
13. Let *S* be a string containing the single character Result(6).
14. Let *R* be a new string value computed by concatenating the previous value of *R* and *S*.
15. Increase *k* by 1.
16. Go to step 5.

NOTE

The encoding is partly based on the encoding described in RFC1738, but the entire encoding specified in this standard is described above without regard to the contents of RFC1738.

B.2.2 unescape (string)

The **unescape** function is a property of the global object. It computes a new version of a string value in which each escape sequence of the sort that might be introduced by the **escape** function is replaced with the character that it represents.

When the **unescape** function is called with one argument *string*, the following steps are taken:

1. Call ToString(*string*).
2. Compute the number of characters in Result(1).
3. Let *R* be the empty string.
4. Let *k* be 0.
5. If *k* equals Result(2), return *R*.
6. Let *c* be the character at position *k* within Result(1).
7. If *c* is not %, go to step 18.
8. If *k* is greater than Result(2)–6, go to step 14.
9. If the character at position *k*+1 within Result(1) is not u, go to step 14.
10. If the four characters at positions *k*+2, *k*+3, *k*+4, and *k*+5 within Result(1) are not all hexadecimal digits, go to step 14.
11. Let *c* be the character whose **code unit** value is the integer represented by the four hexadecimal digits at positions *k*+2, *k*+3, *k*+4, and *k*+5 within Result(1).
12. Increase *k* by 5.
13. Go to step 18.
14. If *k* is greater than Result(2)–3, go to step 18.
15. If the two characters at positions *k*+1 and *k*+2 within Result(1) are not both hexadecimal digits, go to step 18.
16. Let *c* be the character whose **code unit** value is the integer represented by two zeroes plus the two hexadecimal digits at positions *k*+1 and *k*+2 within Result(1).
17. Increase *k* by 2.
18. Let *R* be a new string value computed by concatenating the previous value of *R* and *c*.
19. Increase *k* by 1.
20. Go to step 5.

Deleted: code point

Deleted: code point

B.2.3 String.prototype.substr (start, length)

The **substr** method takes two arguments, *start* and *length*, and returns a substring of the result of converting this object to a string, starting from character position *start* and running for *length* characters (or through the end of the string if *length* is **undefined**). If *start* is negative, it is treated as (*sourceLength*+*start*) where *sourceLength* is the length of the string. The result is a string value, not a String object. The following steps are taken:

1. Call ToString, giving it the **this** value as its argument.
2. Call ToInteger(*start*).
3. If *length* is **undefined**, use +∞; otherwise call ToInteger(*length*).
4. Compute the number of characters in Result(1).

5. If Result(2) is positive or zero, use Result(2); else use $\max(\text{Result}(4)+\text{Result}(2),0)$.
6. Compute $\min(\max(\text{Result}(3),0), \text{Result}(4)-\text{Result}(5))$.
7. If $\text{Result}(6) \leq 0$, return the empty string "".
8. Return a string containing Result(6) consecutive characters from Result(1) beginning with the character at position Result(5).

The **length** property of the **substr** method is 2.

NOTE

The **substr** function is intentionally generic; it does not require that its **this** value be a String object. Therefore it can be transferred to other kinds of objects for use as a method.

B.2.4 Date.prototype.getYear ()

NOTE

The **getFullYear** method is preferred for nearly all purposes, because it avoids the "year 2000 problem."

When the **getYear** method is called with no arguments the following steps are taken:

1. Let *t* be this time value.
2. If *t* is NaN, return NaN.
3. Return $\text{YearFromTime}(\text{LocalTime}(t)) - 1900$.

B.2.5 Date.prototype.setYear (year)

NOTE

The **setFullYear** method is preferred for nearly all purposes, because it avoids the "year 2000 problem."

When the **setYear** method is called with one argument *year* the following steps are taken:

1. Let *t* be the result of $\text{LocalTime}(\text{this time value})$; but if this time value is NaN, let *t* be +0.
2. Call $\text{ToNumber}(\text{year})$.
3. If Result(2) is NaN, set the **[[PrimitiveValue]]** property of the **this** value to NaN and return NaN.
4. If Result(2) is not NaN and $0 \leq \text{ToInteger}(\text{Result}(2)) \leq 99$ then Result(4) is $\text{ToInteger}(\text{Result}(2)) + 1900$. Otherwise, Result(4) is Result(2).
5. Compute $\text{MakeDay}(\text{Result}(4), \text{MonthFromTime}(t), \text{DateFromTime}(t))$.
6. Compute $\text{UTC}(\text{MakeDate}(\text{Result}(5), \text{TimeWithinDay}(t)))$.
7. Set the **[[PrimitiveValue]]** property of the **this** value to $\text{TimeClip}(\text{Result}(6))$.
8. Return the value of the **[[PrimitiveValue]]** property of the **this** value.

B.2.6 Date.prototype.toGMTString ()

NOTE

The property **toUTCString** is preferred. The **toGMTString** property is provided principally for compatibility with old code. It is recommended that the **toUTCString** property be used in new ECMAScript code.

The Function object that is the initial value of **Date.prototype.toGMTString** is the same Function object that is the initial value of **Date.prototype.toUTCString**.

Annex C (informative)

Note

This annex needs to be updated according to the rest of the document.

The Strict variant of ECMAScript

C.1 The strict mode

C.1.1 Excluded Features

1. A strict mode function may not have two or more formal parameters that have the same name. An attempt to create a such a function will fail, either statically, if expressed as a *FunctionDeclaration* or *FunctionExpression*, or dynamically by throwing a *SyntaxError* exception, if expressed in a call to the *Function* constructor (13).
2. Arguments objects for strict mode functions define non-configurable accessor properties named "caller" and "callee" which throw a *TypeError* exception on access (10.5).
3. For strict mode functions, if an arguments object is created the binding of the local identifier "arguments" to the arguments object is immutable (10.6).
4. Strict mode eval code cannot instantiate variables or functions in the lexical context of its eval operator. Instead, a new variable environment is created and that environment is used for declaration binding instantiation for the eval code (10.4.2).
5. If *this* is evaluated within strict mode code, then the *this* value is not coerced.
6. When a *delete* operator occurs within strict mode code, a *ReferenceException* is thrown if its *UnaryExpression* is a direct reference to a variable, function argument, or function name. In addition, if the property to be deleted has the attribute { *[[Configurable]]*:false }, a *TypeError* exception is thrown (11.4.1).
7. When a simple assignment occurs within strict mode code, its *LeftHandSide* must not evaluate to a *Reference* whose base is *null*. If it does a *ReferenceError* exception is thrown. The *LeftHandSide* also may not be a reference to a property with the attribute value { *[[Writable]]*:false } nor to a non-existent property of an object whose *[[Extensible]]* property has the value *false*. In these cases a *TypeError* exception is thrown (11.13.1).
8. The same restrictions as specified for 11.13.1 apply for compound assignment (11.13.2).
9. Strict mode code may not include a *WithStatement*. The occurrence of a *WithStatement* in such a context should be treated as a syntax error (12.10).
10. The identifier "eval" may not appear within a *FormalParameterList* of a strict mode *FunctionDeclaration* or *FunctionExpression*. (13.1).
11. An implementation may not associate special meanings with strict mode functions to properties named "caller" or "arguments" of function instances.

C.1.2 Additional Execution Exceptions

Deleted: 10.1.3.1

Deleted: For strict mode functions, if an arguments object is created, a callee property is not created. The initial values of the arguments object's "caller" and "callee" properties are the value *undefined* and may not be modified

Deleted: <#>When a postfix increment operator occurs within strict mode code, its *LeftHandSide* must not be a reference to a property with the attribute value { *[[Writable]]*:false } nor to a non-existent property of an object whose *[[Extensible]]* property has the value *false*. In these cases a *TypeError* exception is thrown (11.3.1).
<#>The same restrictions as specified for 11.3.1 apply for the postfix decrement operator (11.3.2).[¶]

Deleted: <#>The same restrictions as specified for 11.3.1 apply for the prefix increment operator (11.4.4).[¶]
<#>The same restrictions as specified for 11.3.1 apply for the prefix decrement operator (11.4.5).[¶]

Deleted: If strict mode code uses the value of the *eval* property in any way other than as direct call (that is, other than by the explicit use of its name as an *Identifier* which is the *MemberExpression* in a *CallExpression*), or if the *eval* property is assigned to, an *EvalError* exception is thrown (15.1.2.1.1).[¶]

Annex D
(informative)

Note:

This annex needs to be updated according to the rest of the document.

Correction and Clarifications in Edition 3.1 with Possible ~~Compatibility~~ Impact

Deleted: Compatibility

Through out: In the Edition 3 specification the meaning of phrases such as “as if by the expression **new Array()**” are subject to misinterpretation. For Edition 3.1 the specification text for all internal references and invocations of standard built-in objects and methods has been clarified by making it implicit that the intent is that the actual built-in object is to be used rather than the current dynamic value of the correspondingly name property.

11.8.2, 11.8.3, 11.8.5 While ECMAScript generally uses a left to right evaluation order the Edition 3 specification language for the > and <= operators resulted in a partial right to left order. The specification has been corrected for these operators such that it now specifies a full left to right evaluation order. However, this change of order is potentially observable if user-defined valueOf or toString methods with side-effects are invoked during the evaluation process.

11.2.3 Edition 3.1 reverses the order of steps 2 and 3 of the algorithm. The original order as specified in Editions 1 through 3 was incorrectly specified such that side-effects of evaluating *Arguments* could affect the result of evaluating *MemberExpression*.

12.2 In Edition 3 the algorithm for evaluating the production *VariableDeclaration* : *Identifier Initialiser* was specified in a manner that is incorrect for situations where a *VariableDeclaration* is nested within a *WithStatement* for an object that has a property name that is identical to the *Identifier* in the *VariableDeclaration*. In this situation, the Edition 3 specification causes the value of the *Initialiser* to be assigned to the object’s property rather than the actual variable introduced by the declaration. For Edition 3.1 the algorithm has been revised such that the value of the *Initialiser* will be assigned to the associated variable regardless of any such nesting. Existing ECMAScript code that depends up faithful implementation of this Edition 3 semantics will not operated as expected using an implementation that conforms to the Edition 3.1 specification.

15.10.6 RegExp.prototype is now a RegExp object rather than an instance of Object. The value of its [[Class]] internal property which is observable using Object.prototype.toString is now “RegExp” rather than “Object”

Annex E
(informative)

Note:

This annex needs to be updated according to the rest of the document.

Additions and Changes in Edition 3.1 which Introduce Incompatibilities with Edition 3.

Section 7.1 Unicode format control characters are no longer stripped from ECMAScript source text before processing.

Section 7.2 Unicode characters <NEL>, <ZWSP>, and <BOM> are now treated as whitespace.

Section 7.3 Line terminator characters that are preceded by an escape sequence are now allowed within a string literal token.

Section 7.8.5 Regular expression literals now return an unique object each time the literal is evaluated. This change is detectable by any programs that test the object identity of such literal values or that are sensitive to the shared side effects.

Section 7.8.5 in Edition 3.1 requires scan time reporting of any possible RegExp constructor errors that would be produced when converting a RegularExpressionLiteral to a RegExp object. Prior to Edition 3.1 implementations were permitted to defer the reporting of such errors until the actual execution time creation of the object.

Section 12.6.4 for-in statements no longer throw a TypeError if the **in** expression evaluates to **null** or **undefined**. Instead, the statement behaves as if the value of the expression was an object with no enumerable properties.

Section 15: Implementations are now required to ignore extra arguments to standard built-in methods unless otherwise explicitly specified. In Edition 3 the handling of extra arguments was unspecified and implementations were explicitly allowed to throw a **TypeError** exception.

Section 15.1.1: The value properties **NaN**, **Infinity**, and **undefined** of the Global Object have been changed to be read-only properties.

Section 15.10.2.12 **\s** now matches <NEL>, <ZWSP>, and <BOM>.

Section 15.9.4.2: **Date.parse** is now required to first attempt to parse its argument as an ISO format string. Programs that use this format but depended upon implementation specific behavior (including failure) may behave differently.

Deleted: Incompatibilities

Free printed copies can be ordered from:

ECMA
114 Rue du Rhône
CH-1204 Geneva
Switzerland

Fax: +41 22 849.60.01
Interne.ch

Files of this Standard can be freely downloaded from our ECMA web site (www.ecma.ch). This site gives full information on ECMA, ECMA activities, ECMA Standards and Technical Reports.

**ECMA
114 Rue du Rhône
CH-1204 Geneva
Switzerland**

See inside cover page for obtaining further soft or hard copies.

23 February 2009

Revision History

25 March 2008	pratapL	Added errata from Mozilla (http://www.mozilla.org/js/language/E262-3-errata.html).
26 May 2008	pratapL	Updated to introduce the following: Strict mode, infrastructure for the introduction of getters/setters, and improvements to String, Date, Array, Function, and Object. Removed the notions of equating and joining.
9 June 2008	pratapL	Added Array generics (§15.4.4.14 to 15.4.4.22) Added support for “abc”[0] (§8.6.2.1.2). Reverted the change to separate internal properties on functions (§8.6.2) Changed Unicode Version to 4.0.
11 June 2008	pratapL	Updated 15.9.1.15 (Date Time string format) calling out that it is not required for all the fields in the ISO date format to be present. Integrated first draft of JSON changes Applied styles uniformly for NOTES.
14 June 2008	pratapL	Incorporated basic placeholders for Decimal.
15 June 2008	pratapL	Incorporated updated JSON exposition.
24 June 2008	pratapL	All changes related to introduction of internal <code>[[Extensible]]</code> property and updating the statics on Object: 4.3.3 – abbreviated the definition of object. 4.3.24 – added clarifying note: function contains executable code 4.3.25 to 4.3.28 – added definitions for property, method, attribute, own property, inherited property 8.6.1 – changed title text to add ‘and Descriptors’. Changed first and second para to introduce clarifying text – introduced Ddesc and Pdesc formally. 8.6.2 – introduced <code>[[Extensible]]</code>, removed <code>[[Dynamic]]</code>, restored allowances for host objects, and added clarifying section text. 8.6.2.1.3 – updated to use <code>[[Extensible]]</code> 8.6.2.2 – updated to use <code>[[Extensible]]</code>; steps that said ‘throw something’ now say ‘throw <code>TypeError</code>’. 8.6.2.5 – step that said ‘throw something’ now says ‘throw <code>TypeError</code>’. 10.1.8 – property attributes for each non-negative integer arg specified. 13.2.1, 13.2.2 – updated steps to use <code>[[Extensible]]</code> 15.2.3.15 – object statics specified. 15.2.4 onwards – called out the initial value of the internal <code>[[Extensible]]</code> property.
28 June 2008	pratapL	7.8.4, Annex A – introduced ‘LineContinuation’ to account for string literals with line terminators.
29 June 2008	pratapL	4.2 onwards – changed Writable to <code>Writable</code> 4.2.2 – removed “Strict and Non-Strict Modes” and replaced with “Language Subset Selection” (placeholder) 4.3.7 – introduced built-in constructor 4.3.24 – fixed nature of a <i>function</i> 4.3.29 – added Built-in Method 7.8.5 – minor language cleanup 8.5 – fixed reference to sections 9.5 and 9.6 8.6.1 onwards – Property Attributes: changed <code>[[Dynamic]]</code> to <code>[[Flexible]]</code>, introduced default values for the attributes, changed ‘Strict’ flag to ‘Throw’ flag, changed <code>[[SetOwnProperty]]</code> to <code>[[DefineOwnProperty]]</code>, added <code>[[ThrowablePut]]</code> 8.6.2.2 – removed ‘Strict’ flag from <code>[[Put]]</code> 8.6.2.2.1 – introduced <code>[[ThrowablePut]]</code> 8.6.2.7 to 8.6.2.10 – added new internal properties 8.10 – introduced whole new section 9.10 – introduced <code>IsCallable</code> 12.2 – introduced <code>const</code> into the grammar

		<p>14 – introduced <code>UseSubsetDirective</code> into the grammar</p> <p>15.4.4 – fixed <code>Array</code> methods to use <code>[[ThrowablePut]]</code></p> <p>15.4.5.1 – defined <code>[[ThrowablePut]]</code> for <code>Arrays</code></p> <p>15.9.4.2, 42 – applied Lars’ comments regarding dates</p> <p>15.9.5.42, 43 – fixed reference to section 15.9.1.15</p> <p>Annex C – placeholder</p> <p>Annex D – placeholder</p>
30 June 2008	pratapL	11.1.5 - introduced syntactic sections for getters/setters in object literals
1 July 2008	pratapL	Integrated Unicode changes.
2 July 2008	pratapL	<p>[Integrated changes from Allen]</p> <p>7.8.5 : Backed out change requiring early reporting of invalid regex literals; removed additional language requiring that each such literal represent a single unique object.</p> <p>11.1.5 Added optional trailing comma in object initialisers</p> <p>15.10.6 made <code>RegExp.prototype</code> be a <code>RegExp</code> and its <code>[[class]]</code> “<code>RegExp</code>”</p> <p>11.8.2, 11.8.3, 11.8.5 Fixed evaluation order for <code>></code> and <code><=</code></p>
3 July 2008	pratapL	<p>11.6.1, 11.9.3, 15.13 – incorporated initial edits for <code>Decimal</code>.</p> <p>Introduction of “usage subset cautious”, and all restrictions (7.9.1.1, 10.1.3.1, 10.1.6.1, 10.1.8.1, 10.2.2.1, 11.3.1.1, 11.4.1.1, 11.4.5.1, 11.13.1.1, 11.13.2.1, 12.0.1, 12.6.4.1, 12.10.1, 15.1.2.1.1).</p> <p>12.15.0 introduced <code>ConstantStatement</code></p> <p>15.5.3.3 – introduced <code>String.uniqueIdentifier</code></p>
4 July 2008	pratapL	<p>7.2 – added <code><NEL></code> as a white space character.</p> <p>7.5.2 – reverted the change that made <code>eval</code> a keyword</p> <p>7.8.4 – allowed embedded <code>LineTerminator</code> in string literals provided they are not followed by white space.</p> <p>8 – introduced <code>Property Descriptor</code> and <code>Property Identifier</code> as new types.</p> <p>8.6.1 – introduced <code>[[Const]]</code> as a property attribute.</p> <p>8.6.2.1, 8.6.2.3, 8.6.2.9, 8.6.2.10 – updated the algorithms to account for <code>[[Const]]</code>.</p> <p>10.1.2, 10.1.3, 12, 12.1, 12.2, 12.5, 12.6, 12.6.1, 12.6.2, 12.6.3, 12.6.4, 12.10, 12.15 - introduced <code>Const</code> statements, lexical scoping of <code>consts</code> and function declarations, restricting declarations from use as “pseudo blocks”.</p> <p>12.0.1 – deleted this section and added 12.1.1 instead.</p> <p>15.13.2 – the <code>Decimal</code> constructor can no longer be called as a function; added a clarification that it does not support the internal <code>[[Call]]</code> method.</p> <p>15.13.5.17, 15.13.5.20, 15.13.5.30, 15.13.5.31, 15.13.5.35, 15.13.5.41 – made <code>mc</code> an optional argument.</p> <p>15.13.5.19 – made <code>roundingMode</code> an optional argument.</p> <p>Annex C – newly added.</p> <p>Added a ‘Draft’ watermark to main content section (section 4), and ‘saved date’ in the footer of the page.</p> <p>Regenerated TOC.</p>
14 July 2008	pratapL	<p>4 - updated the Scheme reference to R6R5.</p> <p>5.1.4 - fixed reference to Syntactic grammar.</p> <p>7.8.4 - clarified <code>NonEscapeCharacter</code></p> <p>7.8.4 - introduced <code>u {}</code> syntax for Unicode escape sequences.</p> <p>15.1.2.3 – fixed reference to <code>StrDecimalLiteral</code>.</p> <p>15.2.3.2 through 15.2.3.14 - changed first step to throw a <code>TypeError</code> exception if the first parameter was not of type <code>Object</code>.</p> <p>15.2.3.15 - introduced <code>Object.keys</code> static method.</p> <p>15.3.2.1 - adding the “name” and “parameters” properties in the <code>Function</code> Constructor algorithm (steps 17, 18).</p> <p>15.3.5.4 - introduced the “name” property.</p> <p>15.3.5.5 - introduced the “parameters” property.</p> <p>15.5.4.21 - introduced <code>String.prototype.toJSON</code>.</p> <p>15.6.4.4 - introduced <code>Boolean.prototype.toJSON</code>.</p>

		<p>15.7.4.8 - introduced <code>Number.prototype.toJSON</code>.</p> <p>A.1 - added <code>NonEscapeCharacter</code>, and productions for <code>u { }</code> to the lexical grammar.</p>
15 July 2008	pratapL	<p>8.6.2 - changed <code>-></code> to <code>→</code> in internal properties table.</p> <p>8.6.2.3 - added check for “readonly” accessor properties to <code>[[CanPut]]</code>.</p> <p>10.1.2 - removed the ability to include <code>UseSubsetDirective</code> in the code of a function body passed as a string to the <code>Function</code> constructor.</p> <p>10.2.4 - new section.</p> <p>12.1 - various tweaks to match changes to section 10.</p> <p>12.6.4 - made for-in ignore expressions whose values are either null or undefined rather than throwing a <code>TypeError</code>.</p> <p>12.14 - update catch semantics to match changes to sections 10 and 12.1.</p> <p>15.2.3.2 - moved <code>getOwnProperty</code> to 15.2.3.3.</p> <p>15.2.3.3 - moved <code>getProperty</code> to 15.2.3.4.</p> <p>15.2.3.4 - eliminated <code>getOwnProperty</code> method.</p> <p>15.2.3.4, 15.2.3.5 - added not stating that implicit string properties, corresponding to character positions are not included in the returned property descriptor.</p> <p>15.2.3.5 - corrected algorithm to correctly deal with shadowed inherited properties.</p> <p>15.2.3.5 - eliminated method <code>getProperties</code>, replaced with <code>getOwnPropertyNames</code>.</p> <p>15.2.3.8 - changed name of second argument.</p> <p>15.2.3.9 - reinstated optional second argument to <code>Object.create</code>.</p> <p>15.2.3.14 - moved <code>getPrototypeOf</code> to 15.2.3.2.</p> <p>15.2.3.2 through 15.2.3.13 - defined a length property for the function.</p> <p>A.5 - sync Program grammar in appendix with that in 14.</p> <p>Throughout most in section 10: changed the term “variable object” to “environment object” and the term “variable instantiation” to “environment binding instantiations”.</p> <p>Major overhaul of section 10 to better accomodate block scoped consts and function declarations.</p>
4 Aug 2008	pratapL	<p>Incorporated the following based on the Oslo review:</p> <p>4 - updated the Scheme reference to the IEEE standard.</p> <p>7.8.4, A.1 - reverted the addition of <code>u { UnicodeHexEscapeSequence }</code>, the <code>UnicodeHexEscapeSequence</code> production, and the elaboration on its CV.</p> <p>7.2-7.3, A.1 - restored <code><LS></code> and <code><PS></code> as line termination characters. Made <code><CR><LF></code> a line terminator.</p> <p>7.8.4, A.1 - restored original definition of <code>NonEscapeCharacter</code>.</p> <p>7.8.5 - call out scan time reporting of invalid <code>RegExp</code> literals.</p> <p>8.6.2 - changed term “procedural property” to “accessor property”, removed stray mention of <code>[[Identity]]</code>.</p> <p>8.6.2.1 - changed references to <code>Result(4)</code> to <code>Result(5)</code>.</p> <p>8.6.2.10 - removed redundant call to <code>[[GetOwnProperty]](O, P)</code> in step 5.</p> <p>10.1.2.3 - updated this class number to be 10.1.2.1.</p> <p>15.5.4.21, 15.6.4.4, 15.7.4.8 - added ‘key’ as a parameter to the <code>toJSON</code> functions.</p> <p>15.12.2 - updated step 5.b.i to call <code>V.toJSON(KEY)</code>; updated step 5.c.i to call <code>replacer.call(object, KEY, V)</code>.</p> <p>8.6.2.4 - corrected and refactored algorithm.</p> <p>8.6.2.9 - made any attribute change to a “flexible” data property acceptable.</p> <p>8.10.1 - inlined <code>IsValidDescriptor</code> into <code>ToPropertyDescriptor</code>. Removed other references and deleted definion causing renumber of other definitions.</p> <p>8.10.5 - (<code>FromPropertyDescriptor</code>) changed undefined arg result and deleted bogus step 8.</p> <p>8.10.6 - (<code>ToPropertyDescriptor</code>) corrections in steps 1 and 9b.</p>

		<p>15.5.3.3 – reverted the addition of <code>String.uniqueIdentifier</code>.</p> <p>15.2.3.4 - renamed <code>Object.getProperty</code> to <code>Object.getPropertyDescriptor</code>.</p> <p>15.2.3.11, 15.2.3.13 renamed <code>Object.const</code> to <code>Object.freeze</code> and <code>Object.isConst</code> to <code>Object.isFrozen</code>.</p> <p>15.2.3.12, 15.2.3.15 Added <code>Object.nonExtensible</code> and <code>Object.isExtensible</code> functions.</p> <p>11.6.1, 11.6.2 - incorporated changes to the Addition and Subtraction operators to handle <code>Decimal</code>.</p>
11 Aug 2008	pratapL	<p>11.3.1, 11.3.2, 11.4.4, 11.4.5, 11.4.6, 11.4.7, 11.5, 11.8.1, 11.8.2, 11.8.3, 11.8.4 - incorporated changes to introduce support for <code>Decimal</code>.</p> <p>15.2.3.2 - deleted <code>Object.getOwnProperty</code>; renumbered the remaining sections under 15.2.3.</p> <p>15.2.3.3 - renamed <code>Object.getPropertyDescriptor</code> to <code>Object.getOwnPropertyDescriptor</code>.</p> <p>15.2.3.11 - renamed <code>Object.nonExtensible</code> to <code>Object.preventExtensions</code>.</p>
18 Aug 2008	pratapL	<p>11.3.1, 11.3.2, 11.4.4, 11.4.5, 11.4.6, 11.4.7, 11.5, 11.6.1, 11.6.2, 11.8.1, 11.8.2, 11.8.3, 11.8.4, 11.8.5, 11.9.3 - incorporated changes to these operators' support for <code>Decimal</code> to use the (yet to be defined) <code>Form()</code> and <code>ToDouble()</code> "specification helper functions".</p>
01 Sep 2008	pratapL	<p>11.1.5 – Fixed a typo in the step 4 of the algorithms for <code>get/set</code> property name.</p> <p>11.3.1, 11.3.2, 11.4.4, 11.4.5, 11.4.6, 11.4.7, 11.5, 11.6.1, 11.6.2, 11.8.1, 11.8.2, 11.8.3, 11.8.4, 11.8.5, 11.9.3, and 11.9.6 - incorporated <code>Decimal</code> related changes; these revert the introduction of the <code>Form()</code> and <code>ToDouble()</code> specification helper functions, and introduces calls to <code>instanceof</code> and <code>Decimal</code> functions. Handling of NaNs in comparisons has been changed to make the result more consistent with ES3.</p> <p>Renamed the <code>[[Flexible]]</code> attribute to <code>[[Configurable]]</code> and updated all references to it.</p>
22 Sep 2008	pratapL	<p><code>Decimal</code> is now a primitive, with a wrapper.</p> <p>4.3.30, 4.3.31, 4.3.32 - added new sections for <code>Decimal</code>.</p> <p>4.3.2, 9.9, 9.10, 11.3.1, 11.3.2, 11.4.3, 11.4.4, 11.4.5, 11.4.6, 11.4.7, 11.5, 11.6.1, 11.6.2, 11.8.1, 11.8.2, 11.8.3, 11.8.4, 11.9.3, 11.9.6, 15.1.2.4, 15.1.2.5, 15.13.2 - updated all relevant operators.</p> <p>15.13.4.1 - deleted <code>Decimal.valueOf()</code></p> <p>15.13.4.2, through 15.13.4.9 – introduced new statics on <code>Decimal</code></p> <p>15.13.5.14, 15.13.5.15 – introduced Infinity and NaN on <code>Decimal</code></p> <p>15.13.5.16 through 15.13.5.43 - deleted these functions.</p> <p>7.9.1.1 - introduced restriction in cautious subset for automatic semicolon insertion that results in dead code to detect a <code>SyntaxError</code>.</p> <p>8.10.5 - minor correction of spelling mistake (<code>DescObj</code> changed to <code>Desc</code>).</p> <p>15.3.4.5 - incorporated algorithmic steps for <code>Function.prototype.bind</code></p> <p>15.9.4.4 - introduced <code>Date.now()</code></p> <p>15.12.1 - introduced restriction in <code>JSON.parse</code> that key strings within an object must be unique.</p> <p>C.1.1 - updated restriction (1) according to 7.9.1.1; added restrictions (15) and (16).</p>

13 Oct 2008	pratapL	<p>4 - corrected minor spelling.</p> <p>4.3.3, 4.3.24, 4.3.25, 4.3.28, 4.3.30 - added clarifications in the definitions of Function, Property, Own Property, and Built-in Method.</p> <p>5.2 - added illustrative numbering for the algorithm steps.</p> <p>7.1 - corrected minor spelling.</p> <p>8.6.1 - Table 1: removed <code>[[Const]]</code>. Simplified description for <code>[[Writable]]</code>.</p> <p>Table 3: removed <code>[[Const]]</code>. Made default values for <code>[[Writable]]</code>, <code>[[Enumerable]]</code> and <code>[[Configurable]]</code> false.</p> <p>8.6.2 - restored original text that said that the description of the internal properties was for “native” ECMAScript objects. Updated second column header to be “Value Domain”, and updated second column for every internal property.</p> <p>8.6.2.1 - corrected step numbering in steps 5, 7.</p> <p>8.6.2.3 - updated the algorithm in steps 2, 7, and added a clarifying note.</p> <p>8.6.2.8 - updated the algorithm introducing steps 2 through 8.</p> <p>8.6.2.9, 8.6.2.10 - updated the algorithms removing all mention of <code>[[Const]]</code>.</p> <p>8.7 - restored original text on the non-provision within the spec for functions (built-in, and user defined) returning a reference.</p> <p>8.10 - clarifications regarding absent fields, and object literal syntax for Property Descriptors.</p> <p>8.10.1, 8.10.2, 8.10.3 - updated the algorithms to account for absent fields.</p> <p>8.10.4 - updated algorithm removing the checks for “Unspecified”.</p> <p>8.10.5 - updated algorithm removing the checks for “Unspecified”, and corrected step numbering in steps 13d, 15, 15d.</p> <p>9.10 - clarified the result of <code>IsCallable</code> on Object.</p> <p>10.1.2 - clarified exclusions for “lexical block code”.</p> <p>10.1.2.1 - added to the classification of “unrestricted” code.</p> <p>10.2 - clarified that a thrown exception may exit one or more execution contexts.</p> <p>11.1.1.1 - Removed this section.</p> <p>11.3.1.1 - corrected step numbers that need to be replaced, and provided the new steps.</p> <p>11.9.3 - corrected step numbering in step 1, and changed to an ‘or’ condition in step 4.</p> <p>11.13.1.1 - clarified restriction on assigning to implicit global variables, and corrected the step number that needs to be replaced.</p> <p>12.1 - corrected minor spelling.</p> <p>12.2 - clarified interaction between Block and VariableDeclaration, fixed step 4 in the production <i>VariableDeclaration : Identifier Initialiser</i>.</p> <p>12.6.4 - corrected steps 6, 8 in the first algorithm, and step 9 in the second algorithm.</p> <p>12.6.4.1 - corrected the replacement steps mentioning the right Results.</p> <p>12.10.1 - made the syntax error to be mandatory.</p> <p>12.15 - clarified semantics around access to consts.</p> <p>13.2 - replaced mention of “properties” with “parameters”.</p> <p>14 - updated “use subset ...” to “use strict ...”</p> <p>15.2.3.15 - corrected step numbering for the algorithm.</p> <p>15.3.5.2 - updated <code>[[Enumerable]]</code> to be false.</p> <p>15.3.5.5 - removed this section (it was about “parameters”).</p> <p>15.4.3.2 - clarified definition of <code>isArray</code>.</p> <p>15.10.7.5 - updated <code>[[Writable]]</code> to be true.</p> <p>15.12.1 - corrected step 2 to mention T instead of I.</p>
20 Oct 2008	pratapL	<p>The “cautious” subset is now “strict” mode.</p> <p>4.4.2.2, 10.1.3.1, 10.1.6.1, 10.1.8.1, 10.2.2.1, 11.3.1.1, 11.4.1.1, 11.13.1.1, 12.1.1, 12.10.1, 15.1.2.1.1, C.1.1 - renamed “cautious” to “strict”</p> <p>7.9.1.1 - removed this section (this was related to semicolon insertion in strict mode).</p> <p>10.1.6.1, 10.1.8.1, 10.2.2.1, 11.3.1.1, 11.3.2.1, 11.4.1.1, 11.4.4.1, 11.4.5.1,</p>

		<p>11.13.1.1, 11.13.2.1, 12.1.1, 12.6.4.1, 12.10.1, 15.1.2.1.1 - removed “cautious” from the section heading. C.1 - replaced “cautious” with “strict” in the section heading. C.1.1 - deleted the first exclusion (this was related to semicolon insertion in strict mode). 14 - Updated the productions for <i>UseSubsetDirective</i></p> <p>15.2.3.6 - removed this section (this was about Object.clone), and renumbered subsequent sections.</p> <p>15.5.4.21, 15.6.4.4, 15.7.4.8, 15.9.5.44 - specified the toJSON methods using pseudo-code. 15.12.1 - Updated the note with behaviour in the case of duplicate key strings; duplicate key strings are now permitted.</p> <p>15.2.3.2 through 15.2.3.14, 15.3.4.5, 15.4.4.14 through 15.4.4.22 – removed redundant specification of the value of the length property for these methods on the native objects. It is already specified in section 15.</p> <p>15.4.4.22 - change <code>reduceright</code> to <code>reduceRight</code>.</p>
27 Oct 2008	pratapL	<p>8.6.2.9 - removed an unnecessary reference in step 6, fixed minor typos in steps 9.b.i and 9.c.1. 11.2.3 - swapped the order for steps 2, 3, and updated references to these step numbers in the rest of the algorithm; with this, the value of the <i>MemberExpression</i> will determine what function gets called even before the <i>Arguments</i> have been evaluated (and potentially caused side effects). 12.1 - deleted NOTE 1. 12.2 - clarified scoping for variable statements occurring inside a <i>FunctionExpression</i>. 12.6.4 - removed the initial part of the second last paragraph that talked about the mechanics and order of enumeration of properties being implementation dependent. Added a clarification that newly added properties during enumeration are not visited in the active enumeration. 15.3.4 - clarified the “initial” value of <code>Function.prototype</code>’s <code>[[Extensible]]</code> property.</p> <p>Removed all “this” coercion: 15.3.4.3, 15.3.4.4 – both apply and call will no longer attempt to coerce “this” to an object, or to the global object. 15.4.4.16 through 15.4.4.20 - the “this” parameter, if it is passed in, is used as-is to invoke the callback; if the this parameter is not passed in, undefined as used. C.1.1 - updated item 5 calling out removal the this coercion.</p> <p>C.1.1 – fixed minor typo in item 8, updated item 11 calling out that deleting an unbound reference should throw in strict mode, fixed minor typo in item 14. Annex D - changed <code>[[class]]</code> to <code>[[Class]]</code> in the third paragraph Annex E - added a clarification regarding <code>RegExps</code> in the second paragraph.</p> <p>15.5.4.21, 15.6.4.4, 15.7.4.8, 15.9.5.44 - fixed step 3 in the algorithms to test for <code>IsCallable(Result(2))</code>.</p>
03 Nov 2008	pratapL	<p>13.2.1 - made “this” coercion logic conditional on the strictness of the function. 15.3.4.5 - incorporated revised formulation for <code>Function.prototype.bind</code> 15.3.4.5.1, 15.3.4.5.2 - introduced <code>[[Call]]</code> and <code>[[Construct]]</code> semantics for <code>bind</code>. 15.4.4 - fixed a section reference to <code>[[ThrowablePut]]</code>.</p>

		<p>15.4.5.1 - clarified own/inherited property usage in step 14.</p> <p>15.12 - introduced JSON grammar.</p> <p>15.12.1 - revised pseudo-code for <code>JSON.parse</code></p> <p>15.12.2 - revised pseudo-code for <code>JSON.stringify</code></p> <p>4.2.2 - changed section title to ‘The Strict Variant of ECMAScript’</p> <p>10.3.2.1, 10.4.2.1, 11.4.1.1, 11.13.1.1, 11.13.2.1, 12.1.1, 12.6.4.1, 12.10.1, 15.1.2.1.1 - changed section title to ‘Strict Mode Restrictions’</p> <p>4.3.25 - moved text from section 10.1.1 here; renumbered subsequent subsections.</p> <p>11.3.1.1, 11.3.2.1, 11.4.4.1, 11.4.5.1 - deleted these sections on usage subset restriction.</p> <p>13 - function bodies can also now have a use strict directive.</p> <p>Introduced the notion of Lexical Environments.</p> <p>8.6.2 - renamed “scope chain” to “lexical environment” throught out the document starting from this point onwards.</p> <p>8.7 - clarified the components of a “Reference” and their access (abstract operations).</p> <p>8.7.1 - updated <code>GetValue</code> in terms of the revised abstract operations on References.</p> <p>8.7.2 - <code>PutValue</code> no longer takes a ‘Throw’ parameter. Updated algorithm in terms of revised abstract operations on References.</p> <p>10 - incorporated changes to the entire section to introduce the notion of Lexical Enviroments. Deleted 10.2.4 (Lexical Block Code).</p> <p>11.2.3, 11.4.1, 11.4.3, 11.13.1.1, 11.13.2.1 - updated algorithm in terms of the revised abstract operations on References.</p> <p>11.3.1, 11.3.2, 11.4.4, 11.4.5, 11.13.1 - updated algorithm in terms of revised <code>PutValue</code>.</p> <p>12.2 - updated description for the <code>VariableStatement</code>, and the evaluation of the <code>VariableDeclaration : Identifier Initialiser</code> production.</p> <p>12.10 - revised the algorithm in terms of the Lexical Environment and environment records.</p> <p>12.14 - revised the algorithm in terms of the Lexical Environment and environment records. In ES3.1 this is the primary use case for the notion of lexical environments.</p> <p>15.1.5.2 - added this subsection to call out JSON as a property on the Global Object.</p> <p>Removed all mention of <code>ConstantStatment</code></p> <p>12, 12.15, A.4 - deleted all mention of <code>ConstantStatement</code> and relevant productions.</p> <p>Introduced “debugger;” as a statement form.</p> <p>12, 12.15, A.4 - introduced <code>DebuggerStatement</code>.</p> <p>15.3.2.1 - removed the second last step that was adding the “parameters” property. This property is no longer supported on function instances.</p> <p>C.1.1 - removed mention of when an arguments property is initialized.</p> <p>D - added mention of the swapping of steps in 11.2.3.</p>
07 Nov 2008	pratapL	<p>11.9.7 - introduced this new section for the internal Same Value comparison function.</p> <p>15.4.4.14, 15.4.4.15 - replaced ‘===’ comparison of <code>searchElement</code> with a call to the <code>SameValue</code> function.</p> <p>15.9.4.2 - corrected minor spelling</p>

	<p>15.12.1, 15.12.2 - added suitable notation to indicate optional arguments in the function signatures; replaced the the test for type being “function” with <code>isCallable()</code>; replaced check for the Class by actually testing the <code>[[Class]]</code> property.</p> <p>10.3.3 - corrected minor spelling.</p> <p>8.10.1, 8.10.2, 8.10.3, 8.10.4, 8.10.5, 10.2.2, 10.2.2.1, 10.2.2.2, 10.2.2.3, 10.2.2.4, 10.3.1, 10.3.2, 10.3.3, 15.5.4.14, 15.10.2.5, 15.10.2.6, 15.10.8.2, 15.10.2.15, 15.12.1, 15.12.2, 15.12.2, 15.12.2 - Replaced inconsistent use (w.r.t. section 4.3.25) of “internal function” with “abstract operation” in relevant places</p> <p>15.2.3.3, 15.2.3.4, 15.2.3.8, 15.2.3.9, 15.2.3.10 - removed all mention of “the static”</p> <p>15.2.3.5, 15.2.3.6, 15.2.3.7 - renamed “method” to “function”.</p> <p>15.2.4.5, 15.2.4.7 - updated algorithm to use <code>[[GetOwnProperty]]</code>.</p> <p>12.6.4 - mentioned that the property enumeration order is not specified, and deleted the sentence saying that the order of enumeration is defined by the object.</p> <p>7.5.3 - moved ‘const’ back to the FutureReservedWords lists and added a note alluding to the future use of ‘const’, ‘let’, and ‘yield’.</p> <p>8.11 - added this section as a place holder for the Environment Record Type.</p> <p>9.11 - Moved SameValue algorithm here from 11.9.7</p> <p>12 - added a note regarding <i>FunctionDeclaration</i> within a <i>SubStatement</i>.</p> <p>Annex C, D, E - added a note saying these need to be updated.</p> <p>15.2.4.1 through 15.2.4.7 - All methods that make use of their <code>ThisValue</code> now account for the possibility that they are being invoked (via <code>Function.prototype.apply</code> or <code>Function.prototype.call</code>) with a non-object value passed as the <code>thisArg</code>.</p> <p>15.2.4.3 – introduced pseudo-code for <code>toLocaleString</code>.</p> <p>Incorporated updates for Decimal</p> <p>7.8.3 - introduced <i>DecimalLiteral</i>, and clarified rounding in the case of Decimals</p> <p>8.5 - defined the <i>Decimal Type</i> (alongside the <i>Number Type</i>).</p> <p>9.2 - defined <code>ToDecimal</code> conversion (alongside the <code>ToNumber</code> conversion).</p> <p>9.3.1 - defined the <code>ToDecimal</code> conversion as applied to Strings (alongside the <code>ToNumber</code> conversion).</p> <p>9.8.1 - defined the <code>Tostring</code> conversion as applied to the <i>Decimal Type</i> (alongside the <i>Number Type</i>).</p> <p>11.3.1, 11.3.2, 11.4.4, 11.4.5, 11.4.7, 11.6.1, 11.6.2, 11.9.3, 11.9.6, 15.1.2.4, 15.1.2.5 - explicitly call out the method (as defined in IEEE 754-2008) to apply.</p> <p>11.8.1, 11.8.2, 11.8.3, 11.8.4 - removed special casing for Decimal.</p> <p>11.8.5 - added step 21 for Decimal</p> <p>15.13.2.1 - introduced <code>Decimal ([value])</code></p> <p>15.13.3.1 - clarified semantics for the constructor</p> <p>15.13.4.1 through 15.13.4.9 - moved from the earlier sections 15.13.5.7 through 15.13.5.15</p> <p>Deleted <code>getExponent</code> (was section 15.13.4.5), <code>reduce</code> (was section 15.13.4.8), <code>quantize</code> (was section 15.13.4.9), <code>roundingMode</code> (was section 15.13.5.3).</p> <p>Introduced <code>rescale</code> (now section 15.13.4.15).</p> <p>Regenerated TOC</p>
--	---

01 Dec 2008	pratapL	<p><u>4. 4.2, 4.2.2, 4.3.13, 4.3.16, 4.3.34, 9.11, 10.3.3, 12.15, 13.2.2, 15.3.4.5 - minor editorial corrections.</u> <u>10.4.2.1 - clarified strict mode restriction for eval code.</u></p> <p><u>Reverted the Statement/SubStatement distinction.</u> <u>12, 12.1, 12.1.1, 12.5, 12.6, 12.6.1, 12.6.2, 12.6.3, 12.6.4, 12.10, A4 - reverted the Statement/SubStatement distinction because it isn't needed in the absence of lexical blocks in ES3.1</u> <u>12.5.1, 2nd paragraph in 12.6, 12.11.1 - introduced new strict mode restrictions.</u> <u>C.1.1 - introduced strict mode restriction number 12.</u> <u>Annex D - introduced 4th paragraph clarifying semantics for nested variable declarations.</u></p> <p><u>13.2.1 - reverted to original form (except section reference in step 1) because the added step is already taken care of in 10.4.3.</u> <u>Annex E - called out incompatibilities related to handling of <NEL>, <ZWSP>, <BOM>, <CR><LF>, and the called out the requirement for scan-time reporting of RegExp constructor errors.</u></p> <p><u>Reverted introduction of Decimal</u> <u>4.2, 4.3.2, 7.8.3, 8.5, 9.3, 9.3.1, 9.8.1, 9.11, 11.3.1, 11.3.2, 11.4.4, 11.4.5, 11.4.6, 11.4.7, 11.5, 11.6.1, 11.6.2, 11.8.5, 11.9.3, 11.9.6, 15.1.2.4, 15.1.2.5, 15.13 (including all subsections) - reverted all special casing for Decimal.</u> <u>4.3.32, 4.3.33, 4.3.34 - deleted these sections.</u></p> <p><u>Regenerated TOC.</u></p>
08 Dec 2008	pratapL	<p><u>4. 4.2.2 - cleaned up the 3rd paragraph that introduced strict mode.</u> <u>4.3.19 - cleaned up type definitions.</u> <u>5.2, 9.1, 9.2, 9.3, 9.4, 9.5, 9.6, 9.7, 9.8, 9.8.1, 9.9, 9.10, 9.11 - introduced notion of <i>abstract operations</i>.</u> <u>7.8.5 - reverted the change that said a RegExp literal evaluates to a value of the RegExp type.</u></p> <p><u>4.2.25, 4.3.31 - renamed "Internal Function" to "Built-in" Function, and updated definition of "Built-in Method" [trac 416, 417].</u></p> <p><u>7.3, 7.8.4 - updated LineTerminator production to match <CR>, and clarified the appearance of <LS> and <PS> in String literals [trac 412].</u></p> <p><u>7.8.5, Annex A.1 - updated RegExp literal grammar to accept /[/]/ as a valid literal [trac 419].</u></p> <p><u>7.5, Annex A.1 - removed <i>ReservedWord</i> and <i>Identifier</i> from the <i>Token</i> production [trac 426].</u></p> <p><u>8 - large reorganization of this section [trac 420, 421, 422, 425].</u></p> <p><u>10 - large reorganization of this section [trac 427].</u></p> <p><u>15.2.3.14, 15.12.2 - removed the "fast" parameter from Object.keys and updated its calls [trac 415].</u></p> <p><u>Regenerated TOC.</u></p>
15 Dec 2008	pratapL	<p><u>4.3.31 - Removed all mention of "internal function" [trac 417].</u> <u>11.4.3 - clarified host objects masquerading as "function"</u> <u>16 - updated the list of runtime errors that an implementation must treat as syntax errors [trac 438]</u></p>

		<p>7.3, Annex A.1 - fixed typo introduced when updating the <i>LineTerminator</i> production to match <CR>; we now have the <i>LineTerminatorSequence</i> production [trac 412].</p> <p>8.6.2 - introduced <code>[[FormalParameters]]</code> as an internal property in Table 5. It is then used in 10.6, 13.2.</p> <p>8.6.2 - introduced <code>[[Code]]</code> as an internal property in Table 5. It is then used in 10.4.3, 13.2.</p> <p>8.6.2 - added clarifications in the description for the internal properties in Table 5.</p> <p>8.12 - throughout this section explicitly added “internal” when referring to internal properties/methods.</p> <p>9.10, 9.11 - mentioned that the arguments to these abstract operators must be ECMAScript language values.</p> <p>10 - reorganization of this section continued</p> <p>10.2.1, 10.2.1.1, 10.2.1.2 - minor clarifications.</p> <p>10.2.2.1, 10.2.2.3, 10.2.3, 10.3 - cleanup.</p> <p>10.4 - renamed “Entering and Execution Context” to “Establishing an Execution Context” and moved it to this section number.</p> <p>10.5 - moved the Arguments Object to this section number.</p> <p>10.6 - moved the Declaration Binding Instantiation to this section number.</p> <p>11.1.4, 11.1.5 - cleanup of Array Initialiser and Object Initialiser algorithm pseudo-code.</p> <p>11.2.1 - clarify handling of Unicode escape sequences in <i>CallExpression</i>.</p> <p>11.4.1 - cleanup of algorithm pseudo-code.</p> <p>Deletion of sections calling out strict mode restrictions</p> <p>11.4.1.1 - deleted this section, and folded it into a NOTE in 11.4.1.</p> <p>11.13.1.1 - deleted this section, and folded it into a NOTE in 11.13.1.</p> <p>12.1.1 - deleted this section.</p> <p>12.2, 12.10, 12.14 - cleanup of algorithm pseudo-code.</p> <p>13, 13.2, 13.2.1, 13.2.2 - cleanup of algorithm pseudo-code.</p> <p>15.1.2.1, 15.2.3.2 through 15.2.3.14, 15.3.2.1 - cleanup of algorithm pseudo-code.</p> <p>15.4.4.11 - clarification on the behaviour of the <code>sort</code>.</p> <p>Regenerated TOC.</p>
22 Dec 2008	pratapL	<p>8.6, 8.10, 8.10.1, 8.10.4, 8.10.5, 8.12.1, 8.12.3, 8.12.5, 8.12.10, 10.5, 11.1.5 - renamed Getter/Setter properties to Get/Set [trac 441].</p> <p>11.1.4 - using <code>[[DefineOwnProperty]]</code> to define own properties on Array [trac 443].</p> <p>15.3.5.4 - made the ‘name’ property on function instances non-enumerable [trac 440].</p> <p>15.4.4.11 - clarified the semantics of sorting an array with numerically indexed accessor properties [trac 442].</p>
12 Jan 2009	pratapL	<p>6, 7.6, 7.8.4, 8.4, 11.8.5, 11.9.3, 15.1.3, 15.5.3.2, 15.5.4.5, 15.10.2.8, 15.10.2.10, 15.10.2.15, 15.10.2.16, V.1.2, B.2.1, B.2.2 – changed terminology; all use of “code point” is replaced with “code unit” [trac 446].</p> <p>8.7.2 - made “base” italic in step 2.</p> <p>8.10.4 - eliminated Result(n) usages.</p> <p>8.10.5 - made ToPropertyDescriptor throw a TypeError if the type of the descriptor argument is not Object. This means that</p>

Deleted: terminology

		<p><u>Object.defineProperty/defineOwnProperties</u> will throw if passed a <u>non-object descriptor argument</u>. Also cleaned up some confusing <u>intermediate result names</u>.</p> <p><u>9.9.1 through 9.10</u> - changed terminology: all use of abstract operator is replaced with 'abstract operation' [trac 445].</p> <p><u>11.2.1</u> - added appropriate setting of the strict flag for a reference created for a property access. Replaced all Result(n) usages with named intermediate results.</p> <p><u>15.9.5.2, 15.9.5.42, 15.12.1</u> - changed typography of "NOTE" to be consistent with the rest of the document.</p> <p><u>15.2.3.10</u> - generated step numbers for the algorithm.</p> <p><u>15.12.1</u> - renamed the abstract operation "walk" to "Walk". <u>15.12.2</u> - renamed the abstract operation "str" to "Str" [trac 445]</p> <p><u>Annex D&E</u> - various grammar, spelling and usage tweaks</p> <p><u>Annex E</u> - regarding 15.10.2.2 eliminated statement about line terminators.</p>
<u>15 Jan 2009</u>	<u>pratapL</u>	<p><u>8.6.2(Table 5), 15.4.3.2, 15.4.4, 15.4.5</u> - changed Array.isArray specification to use <u>[[IsArray]]</u> internal property.</p> <p><u>8.6.2(Table 5), 15.3.4.5, 15.3.4.5.1, 15.3.4.5.2</u> - improved definition of <u>Function.prototype.bind</u> including various bugs.</p> <p><u>8.6.2, 10.5</u> - rewrote <u>CreateArgumentsObject</u> and associated helpers.</p> <p><u>8.7, 8.7.1, 8.7.2, 9.10, 9.11, 9.12, 11.2.1</u> - allowed primitive values to be used as the base value of References, eliminating transient wrapper object creation.</p> <p><u>10.1.1, 13, 14, 14.1, A.5</u> - changed method of specification for <u>Use Strict Directives</u>.</p> <p><u>11.1.5</u> - made the name of getter/setter functions defined using object initializers be prefixed with "get" and "set".</p> <p><u>12.5, 12.6, 12.11</u> - eliminated strict mode restrictions on var statements agreed to in Kona.</p> <p><u>12.6.4</u> - fixed step 8 of the algorithm to refer to the right Results.</p> <p><u>13.2, 15.3.3, 15.3.4</u> - restricted use of "arguments" and "caller" properties of the Function instances and Function instances, particularly relating to strict mode.</p> <p><u>15.3.3</u> - added restriction of use of <u>Function.caller</u> and <u>Function.arguments</u> <u>Annex C Preliminary cleanup</u></p> <p><u>Spell checked and corrected through sections 0 through 14.</u></p> <p><u>Regenerated TOC.</u></p>
<u>9 Feb 2009</u>	<u>MV+1 (pratapL)</u>	<p><u>8.6.2</u> - added <u>[[ThrowingPut]]</u> to the set of internal methods that all objects must implement.</p>

		<p>8.6.2 - removed exemptions for host objects that define a <code>[[Class]]</code> property.</p> <p>10.4.1 - eliminated setting this to undefined for global strict code.</p> <p>10.4.2 - step 2b made to parallel step 2c. Inserted new step 3.b that sets the lexical environment for strict eval code.</p> <p>11.8.5, 11.9.3 - minor wording change; deleted the word “value” in the “code unit value values”.</p> <p>15.1.3 - changed UCS-2 and UCS-4 to UTF-16 and UTF-32 respectively.</p> <p>8.6.2 - removed the <code>[[IsArray]]</code> internal property from Table5.</p> <p>15.4.3.2 - <code>Array.isArray</code> now uses the <code>[[Class]]</code> internal property.</p> <p>15.4.4 - the <code>Array</code> prototype object no longer has an <code>[[IsArray]]</code> internal property.</p> <p>10.5 - corrected the “caller” and “callee” properties on the arguments object in strict mode; in strict mode, these are accessor properties that throw a <code>TypeError</code> exception on access.</p> <p>12.5.1, 12.6, 12.11.1 - removed these strict mode restrictions on substatements within control structure statements.</p> <p>C.1.1 - updated “Excluded Features” for strict mode.</p> <p>15.5.5.2 - changed <code>[[Enumerable]]</code> to true in step 9. Also, fixed section reference in step 1.</p> <p>15.3.4.5 - explicitly called out that the value of the bind method is 1.</p> <p>15.3.4, 15.4.4, 15.5.4, 15.6.4, 15.7.4, 15.8, 15.9.5, 15.10.6, 15.11.4, 15.11.7.7, 15.12 - added explicit language about standard built-in prototypes, and corrected section references.</p> <p>6 - removed the ‘.’ after 6 (not used in any other section heading).</p> <p>8.6.1 - correct spelling in Table2 in the description of <code>[[Set]]</code>.</p> <p>8.10.4 - deleted repetition of ‘the following steps are taken’.</p> <p>15.4.4.1.1 - minor wording change in step 2 of <code>SortCompare</code>.</p> <p>9.1, 15, 15.2.4.5, 15.4.5.1, 15.11.6.5 - fixed section reference.</p> <p>8.12.5 - fixed step numbering to start at 1.</p> <p>8.5 - corrected spelling of “Not-a-Number”.</p> <p>10.5 - corrected spellings in steps 12a, 13b, 13c.</p> <p>10.6 - corrected spelling of <code>VariableEnvironment</code>.</p> <p>11.1.5 - corrected spelling of ‘result’.</p> <p>15 - restored style to section heading.</p> <p>Deleted all internal comments. Regenerated TOC.</p>
16 Feb 2009	MV+2 (pratapL)	<p>8.6.2 - forbid host objects from using specification-defined <code>[[Class]]</code> values.</p> <p>15.4.5.1 - Change from defining special <code>[[ThrowingPut]]</code> to defining special <code>[[DefineOwnProperty]]</code> that maintains array invariants</p> <p>8.12.5 - Modified <code>[[ThrowingPut]]</code> to delegate to <code>[[DefineOwnProperty]]</code>. This allows overrides like <code>Array</code>’s to centralize their special semantics in <code>[[DefineOwnProperty]]</code> rather than override both it and <code>[[ThrowingPut]]</code>. Centralized recognition and invocation of set accessors in <code>[[ThrowingPut]]</code>. Removed mention of special <code>Array</code> <code>[[ThrowingPut]]</code>. Also fixed up italics and bold emphasis within algorithm.</p> <p>8.12.10 - Added a note calling out the more elaborate <code>[[DefineOwnProperty]]</code> for <code>Array</code>.</p> <p>10.5 - eliminated special <code>[[ThrowingPut]]</code> because <code>[[DefineOwnProperty]]</code></p>

		<p>now does the heavy lifting.</p> <p>12.2.1 - Added strict mode restriction on using eval as a variable name.</p> <p>13.1 - Repurposed unused section as strict mode restrictions. Added restriction on use of eval as argument name or function name.</p> <p>10.6 - Removed strict eval restrictions that are now enforced via strict mode restriction on Function Definition.</p> <p>8.7.2 - made strict mode PutValue to simple 'eval' reference throw an EvalError exception.</p> <p>C.1.1 - updated "Excluded Features" for strict mode.</p> <p>15.1.2.1.1 - new section defining a direct call eval.</p> <p>10.5 - strict mode arguments don't get mapped, setting [[Writable]]: false breaks argument/formal parameter joining.</p> <p>15.3.4.3, 15.3.4.4 - Added algorithm specifications for apply and call.</p> <p>15.3.4.5 - Function.prototype.bind eliminated 'prototype' property of bound object. Set 'name' property of bound function.</p> <p>15.3.4.5, 15.3.4.5.3 - Add special[[HasInstance]] for bound functions.</p> <p>15.3.5.3 Changed default attributes of Function instances 'name' property to be writable and configurable for backward compatibility reasons.</p> <p>15.4 - Updated prose description of special Array invariants.</p> <p>15.4.4.14, 15.4.4.15 - replaced of 'strict equality' the 'internal SameValue comparison operation (9.12)'. 15.4.4.16, 15.4.4.17, 15.4.4.18 - deleted step 5, and updated line number references. 15.4.4.19 - fixed the algorithm by deleting steps 2, 6, 13, 14 and updated line number references. 15.4.4.20 - deleted step 7, and updated line number references. 15.4.4.21, 15.4.4.22 - deleted step 4, and updated line number references.</p> <p>15.4.5.2 - made the 'length' property writable.</p> <p>11.6.1 - Restored comment in step 7 contrasting use of 'or' to 11.8.5. Restructured to avoid line number references</p> <p>11.8.5 - Restored string type test in step 3 to use and. Reformatted to eliminate goto.</p> <p>15.11.6.1 - Changed description and section references for EvalError.</p> <p>16 - fixed description of conflicting data/access properties in object literals.</p> <p>8.12.10 - added missing return value in step 4.c.</p> <p>9.3 - restored lost bullets.</p> <p>8.7.2, 10.1, 10.1.1, 10.2, 10.4.1.1, 10.4.2, 15.4.5.2 - clarified wording.</p> <p>Regenerated TOC.</p>
23 Feb 2009	MV+3 (pratapL)	<p>5.1.5, 5.1.6 - introduced new sections</p> <p>5.1.7 - renumbered from earlier section number.</p> <p>7.8.4, Annex A - changed LineTerminator to LineTerminatorSequence.</p> <p>7.8.5, Annex A - fixed RegularExpressionClass grammar.</p>

Deleted: compatability

	<p>8.12.9, 15.4.4.11 - added IsCallable checks before invoking <code>[[Call]]</code>.</p> <p>14.1 - simplified grammar for Use Strict Directive and added clarifications.</p> <p>15.2.3.3 - eliminated conversion of null and undefined to the empty string in step2.</p> <p>15.4.4.2, 15.4.4.3, 15.4.4.4 - made <code>[[Class]] == Array</code> check explicit.</p> <p>15.4.5.1 - modified the deletion algorithm to stop when it reaches a non-deletable property.</p> <p>15.10.1, 15.10.2.6, 15.10.2.8, Annex A - RegExp grammar Atom/Assertion fixes.</p> <p>15.10.4.1, 15.10.6.4 - Made RegExp.source and toString tround-trippable.</p> <p>15.12.1 - new section introducing the JSON lexical and syntactic grammar.</p> <p>15.12.2 - renumbered from old section (15.12.1).</p> <p>15.12.3 - renumbered from old section (15.12.2).</p> <p>16 - removed exemption for detecting EvalError.</p> <p>The following changes are clarifications, and refactoring of algorithms to eliminate 'Result(n)' references and 'goto step(n)' statements:</p> <p>4.2.1, 4.2.2, 4.3.5, 4.3.23, 4.3.25, 4.3.26, 9.5, 9.6, 10.3, 10.2.1.1, 10.4.3, 10.5, 12.15, 13, 13.1, 15.2.2.1, 15.2.3.4, 15.2.3.8, 15.2.3.9, 15.2.3.12, 15.2.3.14, 15.3.3.2, 15.3.4.5, 15.4, 15.5.4.2, 15.5.4.3, 15.6.4.3, 15.7.4.2, 15.7.7.4, 15.9.5.42, 15.9.5.43, 15.12.3, 16, Annex D, Annex E - clarified wording.</p> <p>7.5.2, Annex A - repacked keyword table.</p> <p>7.5.3, Annex A - repacked reserved word table.</p> <p>8.7.1 - removed Result(n) reference.</p> <p>15.2.4.6, 15.3.5.3 - refactored algorithm to eliminate goto step(n) statements.</p> <p>8.12.2, 9.3, 9.4, 9.5, 9.6, 9.7, 9.8, 11.1.5, 11.1.6, 11.2.2, 11.2.3, 11.2.4, 11.2.5, 15.1.2.2, 15.1.2.3, 15.1.2.4, 15.1.2.5, 15.2.4.2, 15.2.4.3, 15.2.4.5, 15.2.4.7, 15.3.2.1, 15.3.5.3, 15.4.4.3-22, 15.5.4.4, 15.5.4.5, 15.5.4.6, 15.5.4.21, 15.5.5.2, 15.12.2, 15.12.3 - refactored algorithm to remove Result(n) references.</p> <p>Regenerated TOC.</p>
--	--